COMMERCIAL ITEM DESCRIPTION

Panels (Interconnecting, Loadbearing, With Hang-on Components)

The General Services Administration has authorized the use of this commercial item description.

Intended use. The panels procured under this description are intended for use in establishing functional areas in an open plan office. Hang-on components provide additional storage and more efficient use of vertical space. The panels and components are intended for use with conventional, steel or wood desks, task tables, worksurfaces and mobile pedestals to provide complete workstations.

Salient characteristics. Panels shall be provided in the following types, styles heights and widths.

Type I - Fabric face, acoustical.
Type II - Pass through.

Style A - Raceway only.
Style B - Prewired raceway.

Height A - Reception (40 - 42 inches high).
Height B - Seated privacy (53 - 63 inches high).
Height C - Standing privacy (65 - 72 inches high).
Height D - Conference (74 - 80 inches high).

Components shall be of the following types and depths.

Type III - Shelf
Type IV - Cabinet

Depth A - Standard
Depth B - EDP

Type V - Counter tops
Type VI - Task lights

Design. Panels and components shall be of a design, materials and construction to withstand hard daily use over a minimum expected life of 8 years with a minimum of maintenance and repair. There shall be no design characteristics which negatively affect appearance or serviceability or which could cause injury to personnel or damage to their clothing.

Panels. Type I panels shall have full fabric faces. Type II panel shall have a partial fabric face with an opening to allow sharing of a computer through the panel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:20Z
Check the source to verify that this is the current version before use.

Dimensions. Panels shall be provided in the ranges of heights specified. Panel widths shall be available in a variety of widths. Panel widths shall allow wrapping of 36, 48, 60 and 72 inch wide tables or desks.

Fire hazard. Panels shall have a maximum smoke development rating of 100 and a maximum flame spread rating of 25 when tested in accordance with ASTM Standard E-84.

Acoustics. Type I Panels shall be acoustically rated with a minimum Noise Isolation Class (NIC') rating of 20 in the flanking position and 20 in the barrier position, when tested in accordance with the General Services Administration, Public Building Service Standard PBS C.2, Procedure III-S.

Fabric. Panel face shall be a woven or nonwoven fabric having the performance characteristics listed in Table 1. Colors shall match Guilford colors: wheat (130), oatmeal (254), grey mix (238), wedgewood (150), paprika (154), quartz (380), rose (173), dove (176), peach (172), and toast (293). Panel fabric shall be field replaceable.

Table 1

Characteristic	Requirement	Test Method
Contents	100% polyester	
Weight	15.5 oz./lin. yd based on 66 inch width	
Tensile, warp fill	75 lbs., min. 100 lbs., min.	ASTM D-1682
Tear	20 lbs., min.	Fed. Std. 191, Method 5136
Colorfastness to light	40 hrs., min.	AATCC 16A
Abrasion Resistance	Full commercial serviceability Class 6.	ASTM D-3597 MOD Voluntary Prod. Std. TS-198

Raceway. All panels shall be furnished with a raceway to provide routing of electrical and communication cables. The raceway shall allow easy addition or removal of cables after installation of the panels. The raceway shall accommodate a minimum of six 25 pair cables and three 20 amp circuits. Raceways shall provide communication cable access ports at a minimum of two locations. When applicable cable and electrical access points shall have removable/replaceable covers so there will be no open holes in the raceway.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:20Z
Check the source to verify that this is the current version before use.

Style A panels shall be field retrofittable to provide electrical power outlets. Necessary power components, such as power feeds, power poles, pass through cables and replacement duplex outlets shall be available. No special tools shall be required to retrofit panels.

Style B panels shall be prewired with a six wire, three circuit system with a minimum of 20 amps per circuit. Prewired is defined as including the internal wiring, junction boxes, jumper cables, etc necessary to access power from a contiguous electrified panel, except that duplex receptacles may be provided separately. Panels widths of 48 inches and 60 inches shall allow a minimum of four duplex outlets per panel. Panels widths between 36 inches and 24 inches shall allow a minimum of two duplex outlets per panel. Color or number coding of the outlets is required.

Levelers. The panel line shall provide for precise alignment of adjacent panels and shall have leveling devices to compensate for uneven floors. A minimum of 1-1/2 inches of adjustment is required.

Support legs. Support legs or feet shall be available to stabilize extended panel runs.

Wall mounting brackets. The panel line shall include wall mounting brackets to allow attachment on panels to fixed walls and building support posts.

Interconnection. The panel system shall allow interconnection of two panels at angles of 90, 120, 135 and 180 degrees, three panels in T and Y configurations and four panels in an X configuration. Panels of different heights shall interconnect at 90 and 180 degrees. Connections shall be tight without gaps between panels and shall provide a rigid stable structure.

Component mounting. Panels 51 inches or greater in height shall allow attachment of components on both sides of the panel. Panels less than 50 inches in height shall allow attachment of a counter top at the top of the panel. Counter tops shall be mounted in a manner that will provide a stable surface. Panel shall allow component mounting without penetration of the fabric face of the panel. A positive locking device shall be used to prevent accidental component and panel separation.

Components.

Shelves and cabinets. Shelves and cabinets shall be provided in a minimum of three widths to match panel widths. Shelves shall be also available in an approximate 60 inch width. Height shall be 13-1/2 inches, minimum clear inside dimensions. Standard depth shall be 12 inches, minimum clear

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:20Z
Check the source to verify that this is the current version before use.

inside dimensions. EDP depth shall be 15 inches, minimum clear inside dimensions. Cabinets shall be provided with a receding or flipper door. Cabinet locks shall be available.

Shelf and cabinet bottoms shall be steel. Sides and cabinet doors shall be steel or balanced particleboard construction. Corners and edges shall be radiused.

Counter tops. Counter tops shall be provided in a variety of sizes to match panels. Counter tops shall be top of panel mounted. Depth shall be 15 ± 1 inches. Construction shall be balanced with a high pressure plastic laminate top surface. Self edging is not allowed on front or rear edges. Post forming or T-molding is acceptable. Corners and edges shall be radiused.

Task lights. Task lights shall be designed for mounting on the underside of shelves and cabinets. Light fixtures shall be provided in widths compatible with component widths. Light design shall limit glare and shield the lamp from sight at eye level from a seated position. Task lights shall use commercially available, color corrected, rapid start fluorescent lamps and high power factor, thermally protected ballasts. Task lights shall have individual on/off switches. Lights shall meet applicable Underwriters' Laboratories requirements and the performance tests contained herein. Task lights shall be easily mounted.

Finish. Metal portions of panels and components shall have a matte, baked enamel or epoxy finish. Plastic laminates shall be walnut grain per GSA Standard Sample No. FSS-L-01002, light oak grain per Sample No. FSS-L-01015 and matte, light neutral. Alternatively, the manufacturer may use his commercial walnut and light oak laminates subject to contracting officer's approval. Edgebanding, if used shall match the enamel finish as closely as possible.

Workmanship. Finish shall be smooth, with no hazardous projections, sharp edges or details which may cause personal injury or damage to clothing. Fabric covers shall be neat, smooth and accurately tailored to fit without wrinkles, puckers or other defects which detract from their appearance, serviceability or safety to the user.

Testing. Testing for fire hazard and acoustical performance shall be conducted by an independent laboratory and copies of the test report shall be submitted as proof of compliance. Tests shall be conducted on the entire assembled panel (complete core, adhesive, decorative fabric, frame, joining components, etc.). In addition, the panel system (panels and components) shall meet the applicable requirements of BIFMA First Generation Voluntary Panel Systems Standard PS-1-1984, Underwriters' Laboratories Standard U.L. 1286 and the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:20Z
Check the source to verify that this is the current version before use.

Illumination test. This test is intended to evaluate the amount and uniformity of light on the worksurface.

The task light shall be mounted according to the manufacturer's recommended height (17 to 22 inches) above a measurement plane (light meter photocell top) representing a worksurface. At a point along the centerline of the surface, 20 inches from the rear edge, (point A on Figure 1) the task light shall provide a minimum of 75 fc, not including ambient light. Additional readings shall be taken along reference lines B-B and C-C of Figure 1. The ratio of the maximum to minimum fc readings shall be not greater than 3 to 1.

Identification label. The label shall have the contractor's name or trademark, contract or order number, National Stock Number (if applicable) and month and year of manufacture legibly marked in permanent dark ink. The label shall be affixed in an inconspicuous location and shall not be removable by hand after having been affixed for four hours.

Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Preservation, packaging, packing and marking. Preservation, packaging, packing and marking shall be as specified in the contract or order.

NOTES: Purchaser shall specify applicable panel and component characteristics (i.e. type, style, height, etc.).

Manufacturers are encouraged to offer their commercially available accessories, components, finishes, etc. not specifically required by the description.

The commercial item certification clause is not required when this commercial item description is used for procurement.

Sample panels of plastic laminates are obtainable from the General Services Administration, Office of Federal Supply and Services, Furniture Commodity Center, Engineering Division, Washington, DC 20406.

Sample panels of enamel finishes are obtainable from the business service center, General Services Administration, Office of Federal Supply and Services, Washington, DC 20407 or the Business Service Center in the nearest GSA Regional Office.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:20Z
Check the source to verify that this is the current version before use.

Copies of BIFMA standards are available from the Business and Institutional Furniture Manufacturers Association, 2335 Burton, SE, Grand Rapids, MI 49506.

Copies of Underwriters' Laboratories standards are available from Underwriters Laboratories, Inc., Publication Stock, 333 Pfingsten Rd., Northbrook, IL 60062.

Copies of ASTM standards are available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

Preparing Activity

GSA-FSS


Military Interests

Military Coordinating Activity:
Army - GL

Custodians:
Army - GL
Navy - YD
Air Force - 99

Review Activity:
Air Force - 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:20Z
Check the source to verify that this is the current version before use.

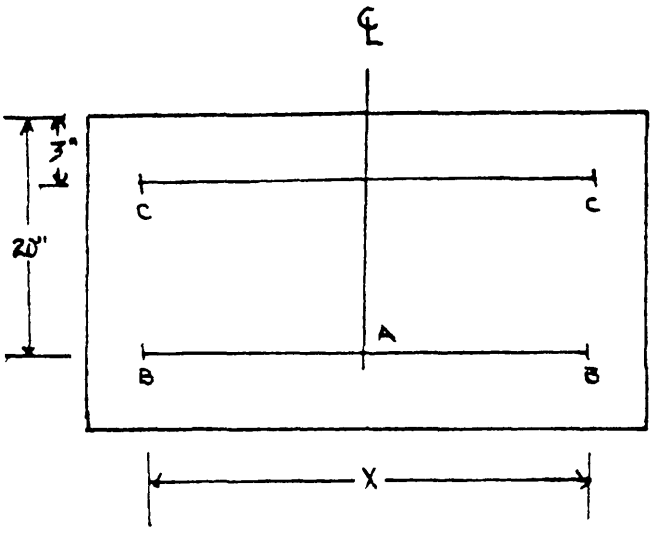

X = Maximum component width for which tasklight is recommended.

Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:20Z
Check the source to verify that this is the current version before use.