INCH-POUND

MIL-DTL-25677/1
w/AMENDMENT 4
4 November 2004
SUPERSEDING
MIL-DTL-25677/1
AMENDMENT 3
17 December 2002

DETAIL SPECIFICATION SHEET

ADAPTER, PRESSURE LUBRICATING OIL SERVICING, AIRCRAFT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-25677.

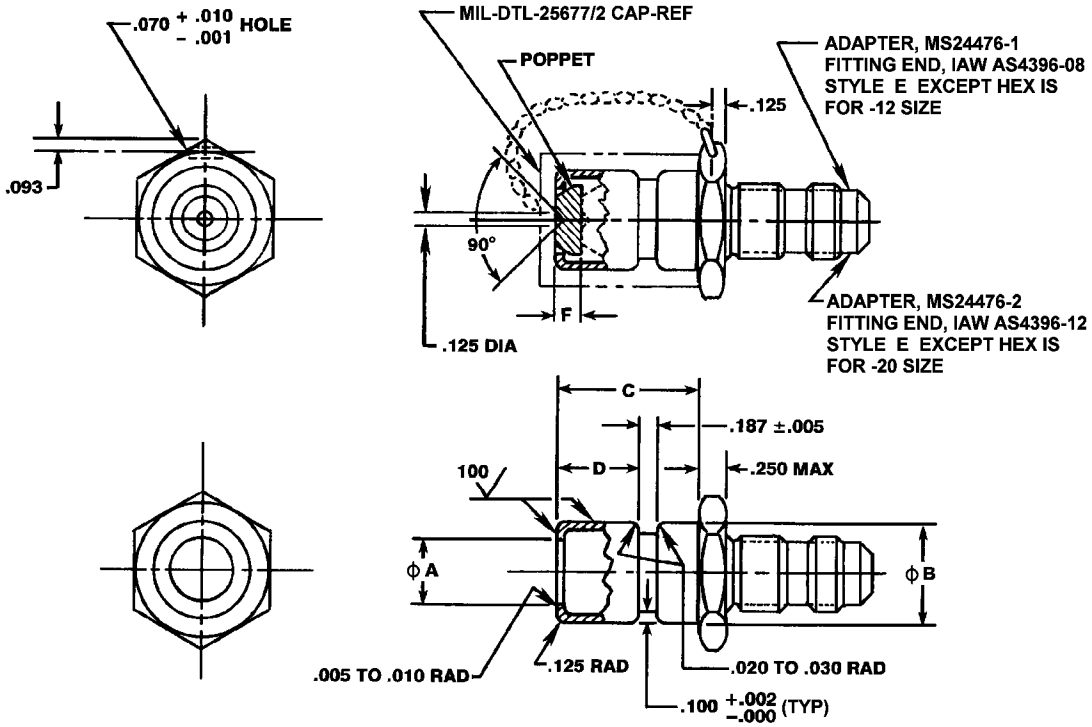


FIGURE 1. Adapter.

AMSC N/A FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:00Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances decimals ± .010; angles ± 1°.
2. Dimension F is measured from face of adapter.
3. The MS24476 Part or Identifying Number (PIN) have been retained.
4. Dimensions A and B shall be concentric within .001 FIM. Poppet shall not extend beyond face of adapter.
5. Material and finish: See MIL-DTL-25677
6. International standardization agreement implementation. This specification implements AIR STD 25/1B(2) "PRESSURE REPLENISHMENT CONNECTIONS FOR ENGINE LUBRICATING OIL "and STANAG 3595 ED.4(2), "AIRCRAFT FITTING FOR PRESSURE REPLENISHMENT OF GAS TURBINE ENGINES WITH OIL". When amendment, revision, or cancellation of this specification is proposed, the preparing activity must coordinate the action with the U.S. National Point of Contact for the international standardization agreement, as identified in the ASSIST database at http://assist.daps.dla.mil.

FIGURE 1. Adapter - Continued.

TABLE I. Dimensions, weight, flow rate, and pressure drop.

PIN	Tubing OD REF	A +.002 -.000	B +.000 -.002	C +.007 -.005	D ± .002	F +.031 -.000	Weight max lb	When used with MIL-DTL-25677/3 nozzle		
								Nozzle PIN	Flow rate MIN with -45°F oil (gpm)	Press drop MAX (psi)
MS24476-1	.500	.580	1.000	1.212	.687	.219	.40	MS24475-1	1.0	20
MS24476-2	.750	.812	1.438	1.562	1.000	.500	.83	MS24475-2	1.0	25

REQUIREMENTS

The adapter shall be in accordance with figure 1 and table I.

Remove burrs and break sharp edges .016 maximum radius.

For design feature purposes, this specification sheet takes precedence over the procurement document referenced herein.

The adapter is designed for use with synthetic lubricating and preservative oil.

For installation: clearance shall be allowed for maximum overall dimensions shown for cap and adapter.

The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:00Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-25677, this document references the following:

MIL-DTL-25677/2
MIL-DTL-25677/3
AIR STD 25/1B(2)
STANAG 3595 ED.4(2)
SAE AS4396

CONCLUDING MATERIAL

Custodians:
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2634-000)

Review activities:
Navy - MC, SA, CG
Air Force - 06, 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:00Z
Check the source to verify that this is the current version before use.