
MILITARY SPECIFICATION SHEET

EARPHONE ELEMENT, H-143/AIC

This specification sheet is approved for use by the Air Force Acquisition Logistics Division, Directorate of Electronic Support (AFALD/PTES), Wright-Patterson AFB, Ohio, 45433, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the earphone element described herein shall consist of this document and the latest issue of Specification MIL-E-25670 (USAF).

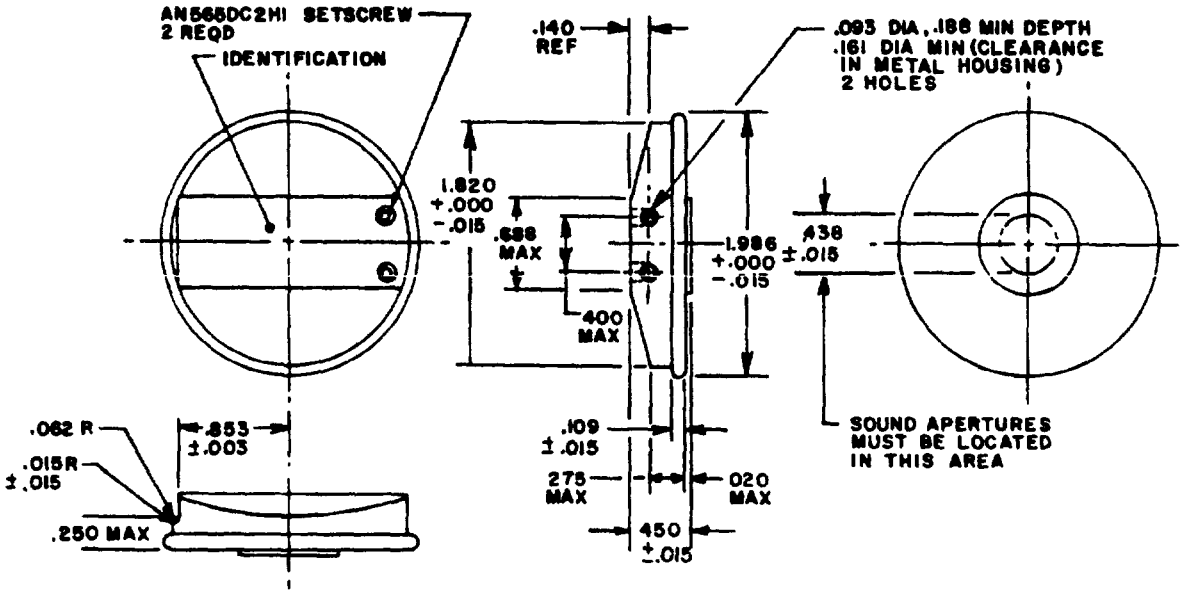

INCHES	MM	INCHES	MM
.003	.08	.250	6.35
.015	.38	.275	6.98
.020	.51	.400	10.16
.062	1.57	.438	11.13
.093	2.36	.450	11.43
.109	2.77	.688	17.48
.140	3.56	.853	21.67
161	4 09	1.820	46.23
.188	4.78	1.986	50 44

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.010 (.25 mm).
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25 4 mm.

FIGURE 1. Earphone element H-143/AIC

(B) Denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:58Z
Check the source to verify that this is the current version before use.

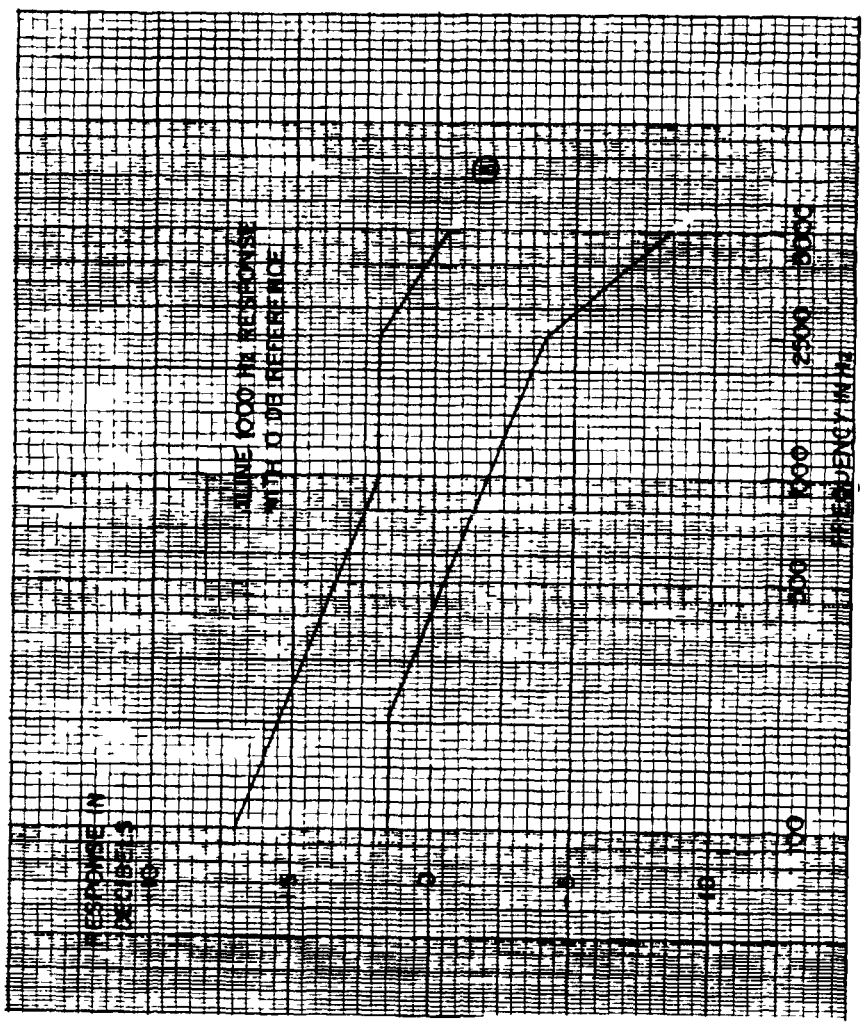


FIGURE 2. Ground level frequency response envelope for earphone element H-143/AIC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:58Z
Check the source to verify that this is the current version before use.

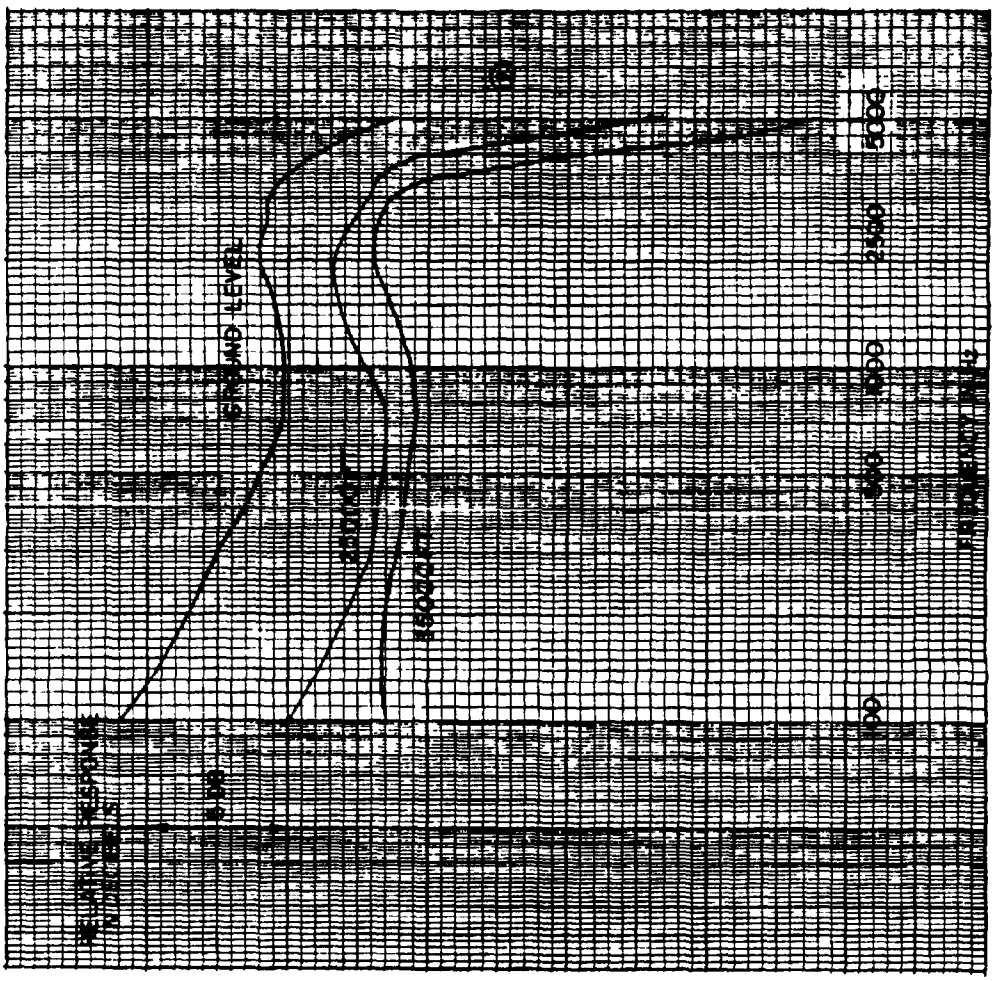


FIGURE 3. Typical pressure response frequency characteristics for earphone element H-143/AIC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:58Z
Check the source to verify that this is the current version before use.

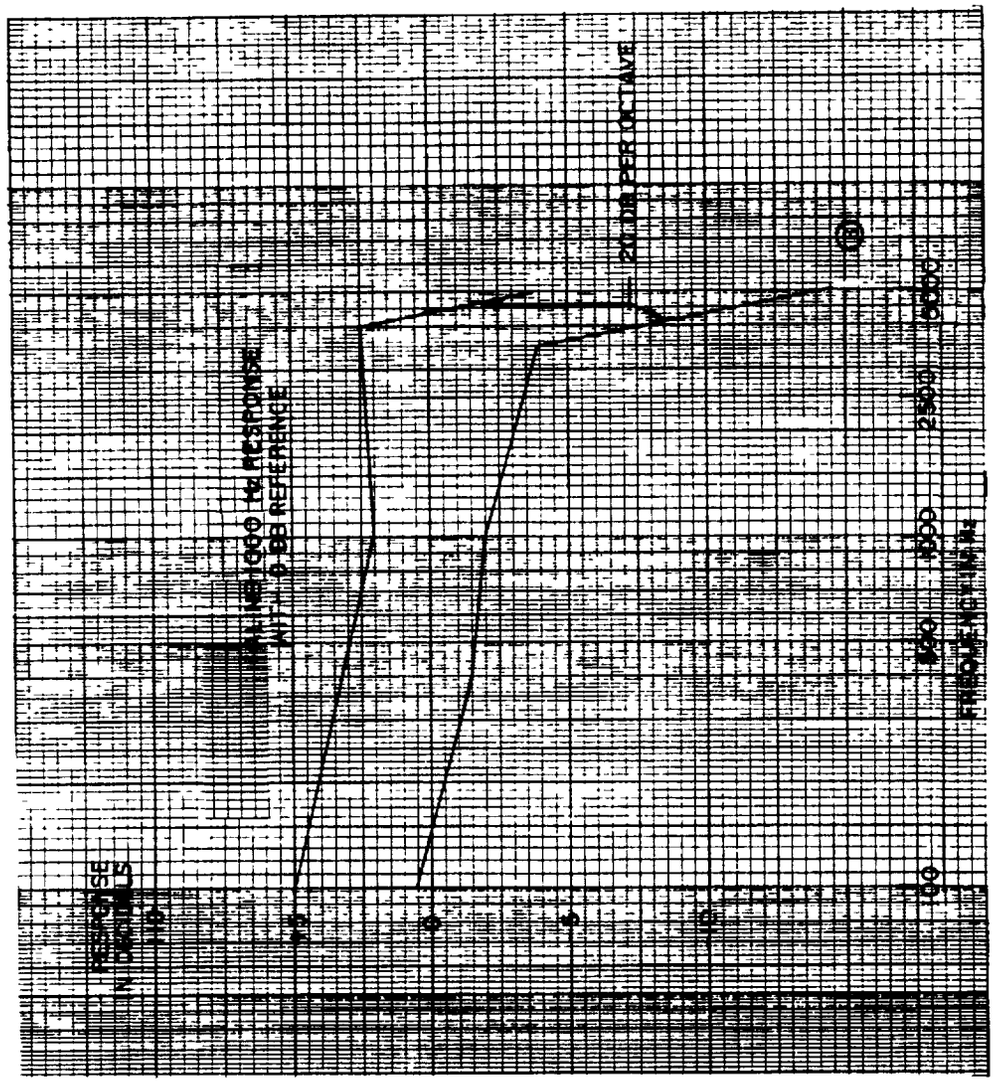


FIGURE 4. 25,000 ft. frequency response envelope for earphone element H-143/AIC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configuration: See figure 1

Maximum weight: 35 grams.

Color: Dull black, face may be aluminum, anodized, natural color.

Nominal coil clearance: 0.006 inch.

Stray magnetic field: 5° maximum at 12 inches.

Materials: Natural rubber, rubber cement, rubber substitutes, and plastic material shall not be used as wedges and fillers.

Terminals: Plated to prevent corrosion.

(B) Frequency response range: 100 to 5000 Hz

Frequency response.
At ground level - Within the limits specified in figure 2. The response in 1000 to 5000 Hz shall not change by more than ±3 dB in any 500 Hz limit

At altitude - Within the characteristics shown on figure 3 and in the response envelope on figure 4.
Sensitivity - 105 ±3 dB at 1000 Hz at ground level; 100 dB minimum at 1000 Hz at an altitude of 25000 feet

Impedance
At 1000 Hz - 19 ±2 ohms.

Between 100 and 3000 Hz - Shall not exceed 22 ohms.

Harmonic distortion: Maximum of 3% between 100 and 2000 Hz, maximum of 5% between 2000 and 5000 Hz.

Articulation In accordance with MIL-E-25670

Custodian
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5965-F167)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:58Z
Check the source to verify that this is the current version before use.