PERFORMANCE SPECIFICATION SHEET

EARPHONE ELEMENT,
HIGH AND LOW-ALTITUDE, H-143/AIC
AND LOW-ALTITUDE, WATER-IMMERSIBLE, H-143A/AIC

This amendment forms part of Specification Sheet MIL- PRF-25670/2A, dated 30 May 1997, and is approved by all Departments and Agencies of the Department of Defense.

PAGE 3

FIGURE 4. Delete and substitute the following:

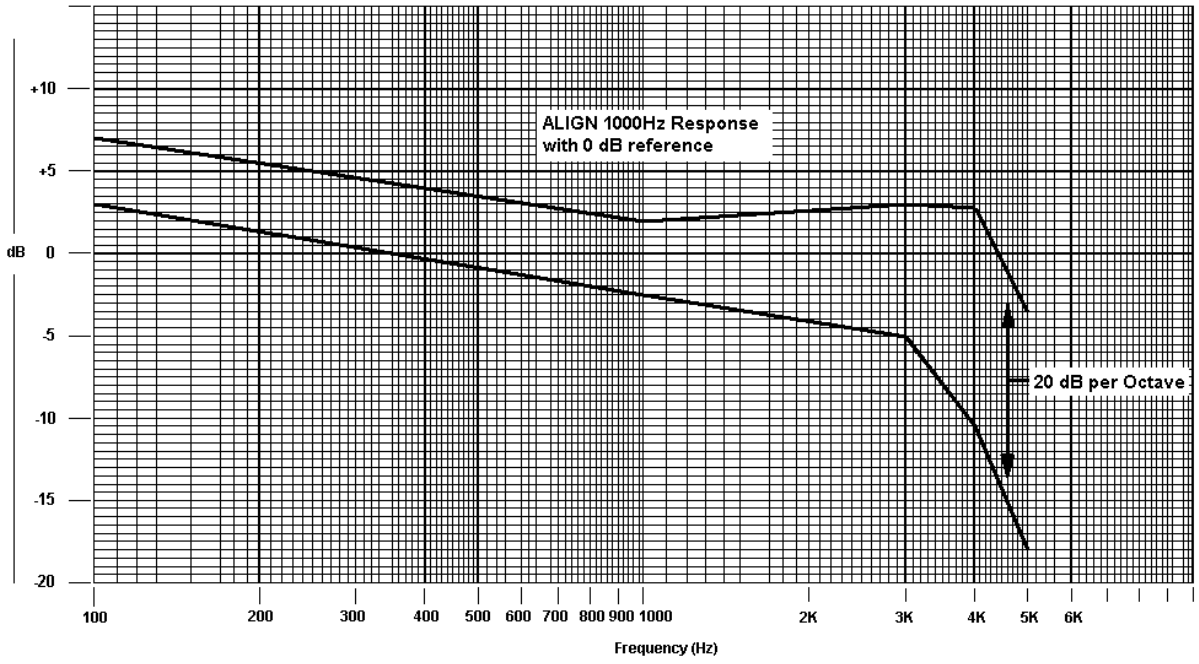


FIGURE 4. 25,000 ft. frequency response envelope for earphone H-143/AIC.

PAGE 4

REQUIREMENTS:

Frequency response:

After “Frequency response:” add “of actual unit under test”


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:58Z
Check the source to verify that this is the current version before use.

PAGE 4

At the end of the “Frequency response:” “At ground level paragraph:” add the following TABLE:

TABLE I. Key points for ground level. (Figure 2)

| FIGURE 2. GROUND LEVEL FREQUENCY RESPONSE KEY BREAK POINTS DIGITIZED. | | | | | |
|---|---|---|---|---|---|
| FREQUENCY POINTS | 100 Hz | 210 Hz | 1,000 Hz | 2,500 Hz | 5,000 Hz |
| UPPER LIMIT dB | +7.00 | +5.39 | +2.00 | +2.00 | -0.50 |
| LOWER LIMIT dB | +1.50 | +1.50 | -1.97 | -4.00 | -8.50 |

At the end of the “Frequency response:” “At altitude paragraph:” add the following TABLE:

TABLE II. Key points for 25,000 ft. altitude. (Figure 4)

| FIGURE 4. 25,000 FT FREQUENCY RESPONSE KEY BREAK POINTS DIGITIZED. | | | | | |
|---|---|---|---|---|---|
| FREQUENCY POINTS | 100 Hz | 1,000 Hz | 3,000 Hz | 4,000 Hz | 5,000 Hz |
| UPPER LIMIT dB | +7.0 | +2.0 | +3.0 | +2.75 | -3.50 |
| LOWER LIMIT dB | +3.0 | -2.50 | -5.0 | -10.50 | -18.00 |

PAGE 5.

TABLE I: Renumber to “TABLE III.”

Custodians:
Army - CR
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5965-0369)

Review activities:
Air Force - 99



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:58Z
Check the source to verify that this is the current version before use.