INCH-POUND

MIL-C-83526/6A
30 June 1989
SUPERSEDING
MIL-C-83526/6
19 August 1986


MILITARY SPECIFICATION SHEET

COVER, FIBER OPTIC, CONNECTOR, CIRCULAR, HERMAPHRODITIC, ENVIRONMENTAL, 2 AND 4 POSITIONS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83526.

Inches	mm	Inches	mm
.239	6.07	.512	13.00
.250	6.35	.645	16.38
.259	6.58	.655	16.64
.365	9.27	1.000	25.40
.375	9.52	1.380	35.05
.449	11.40	4.50	114.3
.50	12.7		

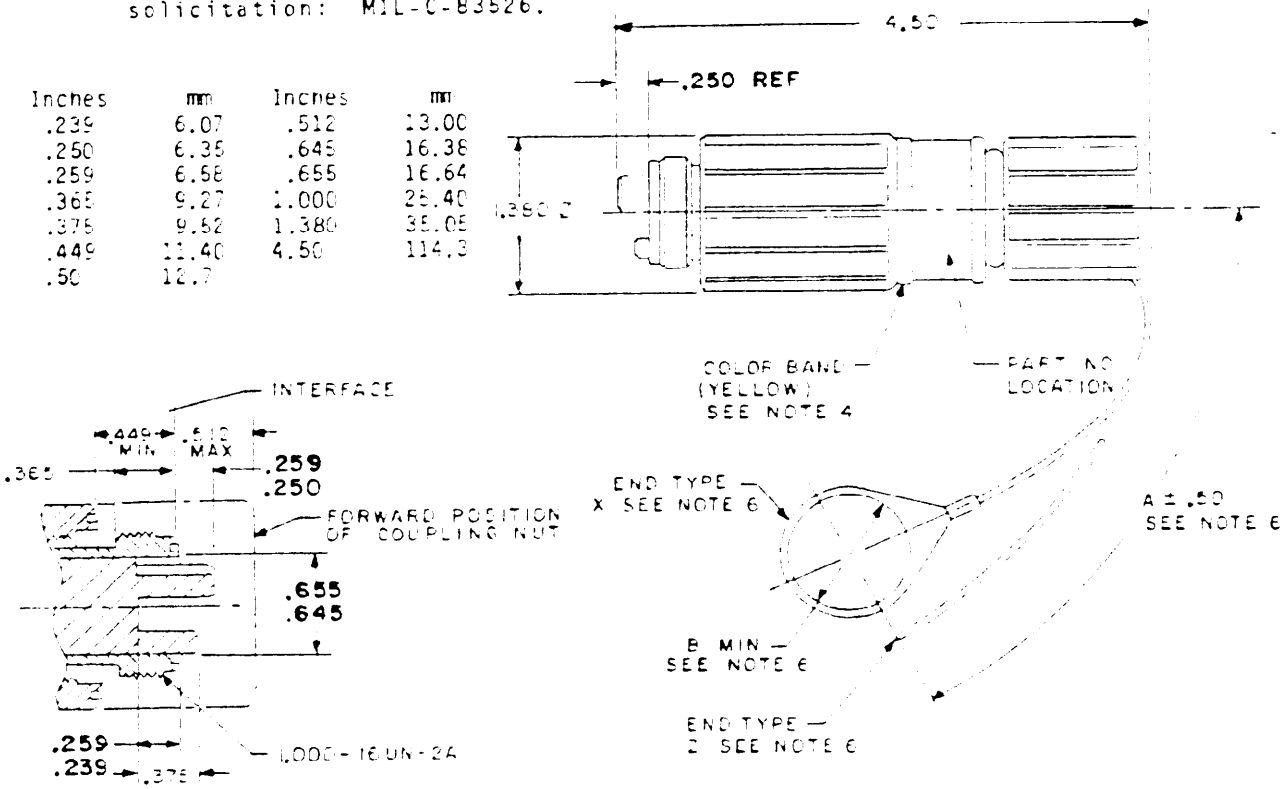


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals and ±.03 (0.8 mm) for two place decimals. Angular tolerances are ±0° 30'.
4. The phrase "Fiber-Optic" must be included within the yellow band.
5. Unless otherwise specified, dimensions are symmetrical about centerlines.
6. See table II for applicable dimensions, part number and applications.

FIGURE 1. 2 and 4 position dust cover.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

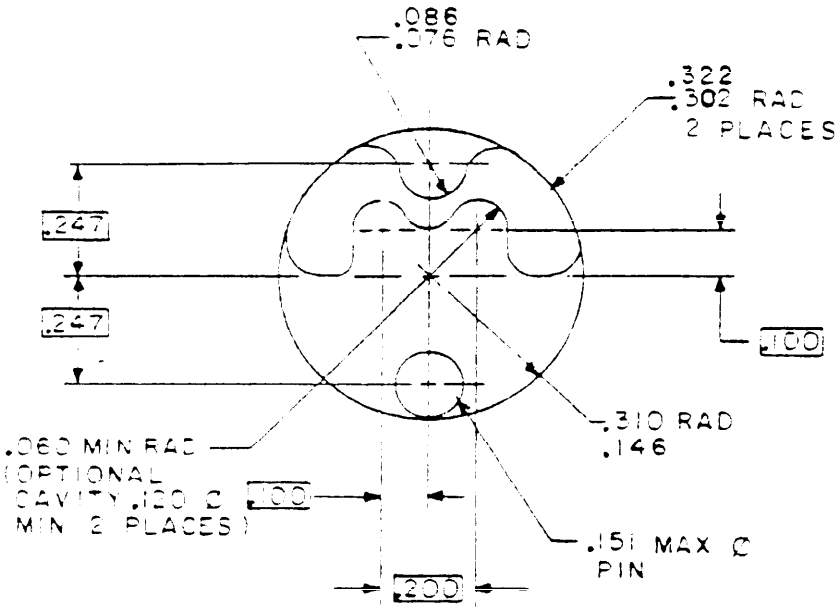

Inches	mm
.060	1.52
.076	1.93
.086	2.18
.100	2.54
.120	3.05
.146	3.71
.151	3.84
.200	5.08
.247	6.27
.302	7.67
.310	7.87
.322	8.18

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Dust cover interface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figures 1 and 2.

Weight: 8.0 ounces maximum.

Coupling forces: 11.0 pounds.

Coupling torques: 5 inch-pounds minimum.

Optical performance: Not applicable.

Materials: The material requirements are listed in table I.

Identification marking:

Part or Identifying Number (PIN): See table II.

Inserts: Not applicable.

Terminus cleaning: Not applicable.

Insert retention axial strength: Not applicable.

Insert retention radial strength: Not applicable.

Terminus retention: Not applicable.

Terminus insertion and removal forces: Not applicable.

Twist test: Not applicable.

Cable seal flexing: Not applicable.

Cable retention: Not applicable.

TABLE I. Material description.

Parts description	Material	Finish
Coupling nut Connector shell Plug insert Compression nut	Aluminum alloy 2011-T3 QQ-A-225/3 "	Anodized MIL-A-8625 type II, class 2 Color: Gray
Cable assembly Dowel Cap screw	CRES " "	Passivated MIL-S-5002 "
O-ring	Fluorosilicone Rubber, MIL-R-25988 type I, class 1	None
Wiper seal	Molythane	None

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

PIN: M83526/06- (dash number from table II). Marked on dust cover.

TABLE II. PIN and characteristics.

PIN M83526/06-	A	B	End type	Used on M83526/ connector
-01	12.53	---	z	1 and 9
-02	10.76	1.253	x	3
-03	10.85	1.065	x	11

Patent notice: The Government does not have royalty-free license under the following patent for the benefit of manufacturers of the item, either for the Government or for use in equipment to be delivered to the Government.

Patent number	Patent expiration date
US 3,994,564	11/30/1993
US 4,054,366	10/18/1994
US 4,060,308	11/29/1994

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, SH
Air Force - 11, 17, 19, 80, 90, 99
DLA - ES

User activities:
Navy - MC, OS, YD
Air Force - 13, 14

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0065-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.