INCH-POUND

MIL-C-83526/7A
30 June 1989
SUPERSEDING
MIL-C-83526/7
19 August 1986

MILITARY SPECIFICATION SHEET

COVER, FIBER OPTIC, CONNECTOR, CIRCULAR, PLAIN, ENVIRONMENTAL, 2, 4, AND 6 POSITIONS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83526.

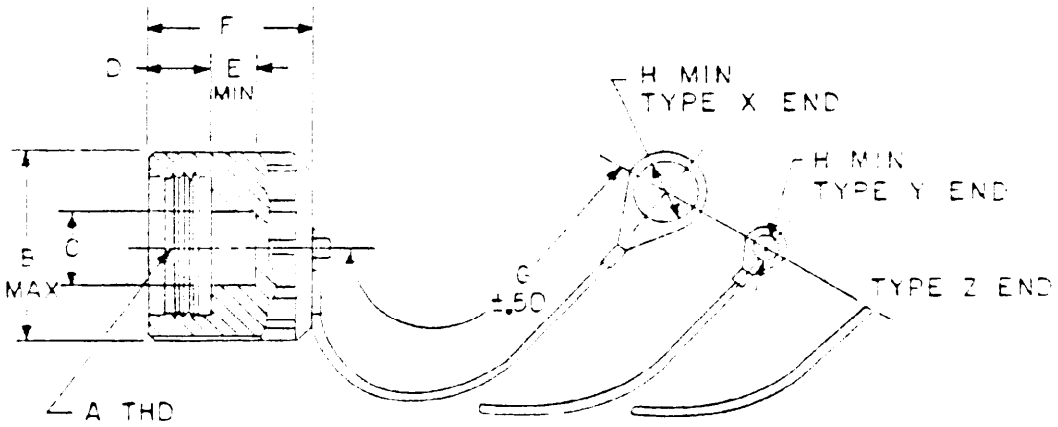


FIGURE 1. Connector dust cap.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

Military part no. M83526/7	Dimensions									Used on M83526/ connector
	A - Thread	B dia	C dia	D	E	F	G	H dia	End type	
-01	1.000-16UN-2B	1.380 (35.05)	.666 (16.92)	.500 (12.70)	.270 (6.86)	1.15 (29.2)	8.3 (211)	--	Z	/1 and /9
-02	1.000-16UN-2B	1.380 (35.05)	.666 (16.92)	.500 (12.70)	.270 (6.86)	1.15 (29.2)	6.5 (165)	1.253 (31.83)	X	/3
-03	1.000-16UN-2B	1.380 (35.05)	.666 (16.92)	.500 (12.70)	.270 (6.86)	1.15 (29.2)	6.6 (168)	1.065 (27.05)	X	/11
-04	1.437-12UN-2B	1.810 (45.97)	1.025 (26.04)	.640 (16.26)	.400 (10.16)	1.34 (34)	7.8 (198)	--	Z	/2 and /10
-05	1.437-12UN-2B	1.810 (45.97)	1.025 (26.04)	.640 (16.26)	.400 (10.16)	1.34 (34)	6.7 (170)	1.630 (41.40)	X	/4
-06	1.437-12UN-2B	1.810 (45.97)	1.025 (26.04)	.640 (16.26)	.400 (10.16)	1.34 (34)	7.4 (188)	.185 (4.70)	Y	/5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals, ±.03 (0.8 mm) for two place decimals and ±1 (3 mm) for one place decimals. Angular tolerances are ±0° 30'.
4. See dimension table for applicable military part numbers, dimensions and applications.

FIGURE 1. Connector dust cap - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Weight: 5 ounces maximum.

Coupling force: 11.0 pounds.

Coupling torques: 5 inch-pounds minimum.

Optical performance: Not applicable.

Materials: The material requirements are listed in table I.

Inserts: Not applicable.

Terminus cleaning: Not applicable.

Insert retention axial strength: Not applicable.

Insert retention radial strength: Not applicable.

Terminus retention: Not applicable.

Terminus insertion and removal forces: Not applicable.

Twist test: Not applicable.

Cable seal flexing: Not applicable.

Cable retention: Not applicable.

External bending moment: Not applicable.

Part or Identifying Number (PIN): See figure 1 (marked on rear of dust cap).

TABLE I. Material description.

Parts description	Material	Finish
Buttonhead screw spacer	CRES 18-8 in accordance with ASTMA582	Passivated in accordance with MIL-S-5002
Cover	ALuminum alloy 2011-T3 QQ-A-225/3	Anodized MIL-A-8625 Type II, class 2 Color: Gray
Cable	CRES, coated nylon	
Bracket, anchor	CRES, 302-304 in accordance with QQ-S-766, condition A	Passivated in accordance with MIL-S-5002

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, SH
Air Force - 11, 17, 19, 80, 90, 99
DLA - ES

User activities:
Navy - MC, OS, YD
Air Force - 13, 14

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0065-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.