INCH-POUND


MIL-C-83526/8A
30 June 1989
SUPERSEDING
MIL-C-83526
19 August 1986

MILITARY SPECIFICATION SHEET

COVER, FIBER OPTIC, CONNECTOR, CIRCULAR, HERMAPHRODITIC, ENVIRONMENTAL, 6 POSITIONS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83526.

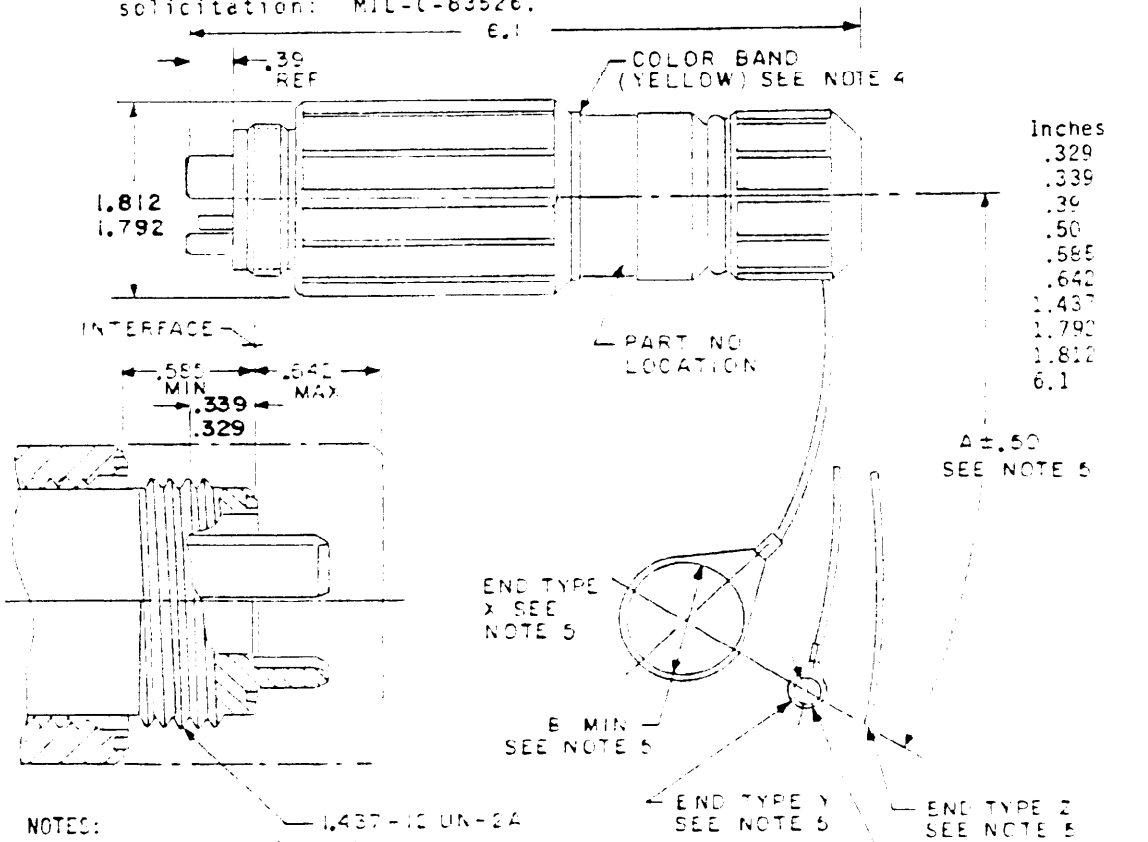

Inches	mm
.329	8.36
.339	8.61
.39	9.9
.50	12.7
.585	14.86
.642	16.31
1.437	36.50
1.792	45.52
1.812	46.02
6.1	155


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals, ±.03 (0.8 mm) for two place decimals and ±.1 (3 mm) for one place decimals. Angular tolerances are ±0° 30'.
4. The phrase "Fiber-Optic" must be included within the yellow band.
5. See table II for applicable military part numbers, dimensions and applications.

FIGURE 1. Connector test plug.

AMSC N/A FSC 6060

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

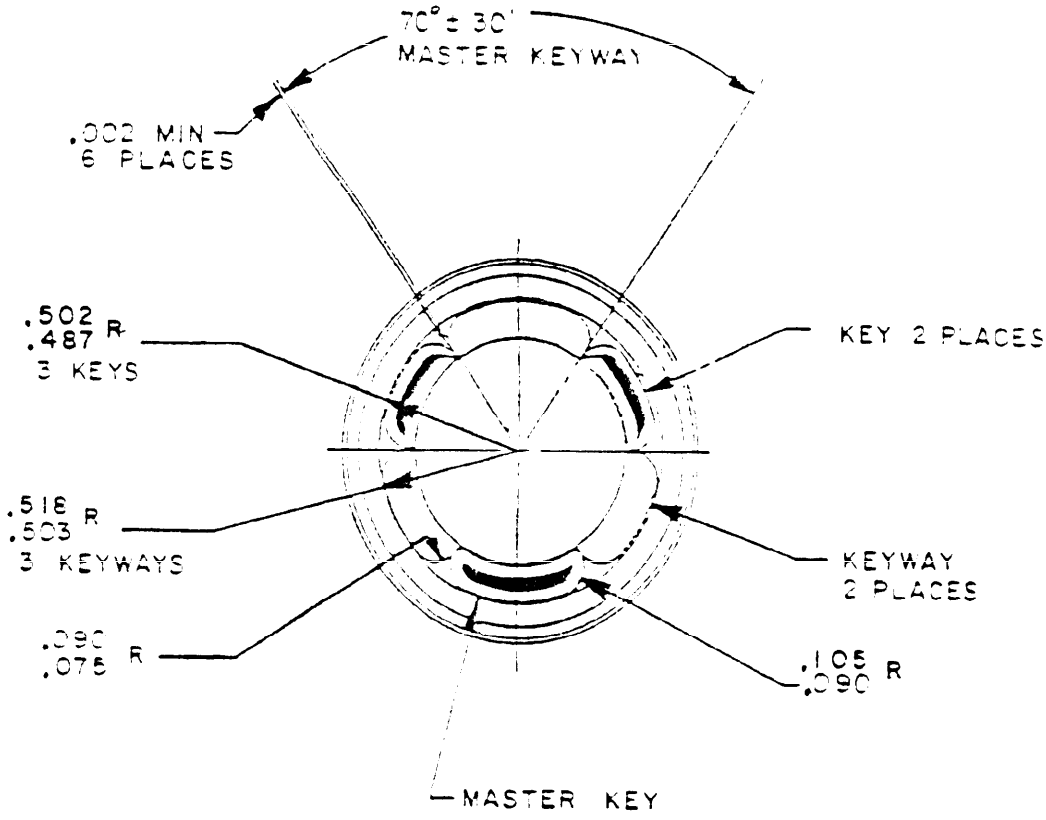

Inches	mm
.002	0.05
.075	1.90
.090	2.29
.105	2.67
.487	12.37
.502	12.75
.503	12.78
.518	13.16

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Dust cover interface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figures 1 and 2.

Weight: 15 ounces maximum.

Coupling forces: 11.0 pounds.

Coupling torques: 5 inch-pounds minimum.

Optical performance: Not applicable.

Materials: The material requirements are listed in table I.

Identification marking:

Part or Identifying Number (PIN): See table II.

Inserts: Not applicable.

Terminus clearing: Not applicable.

Insert retention axial strength: Not applicable.

Insert retention radial strength: Not applicable.

Terminus retention: Not applicable.

Terminus insertion and removal forces: Not applicable.

Twist test: Not applicable.

Cable seal flexing: Not applicable.

Cable retention: Not applicable.

TABLE I. Material description.

Parts description	Material	Finish
Connector shell Plug insert Compression nut	Aluminum alloy 2011-T3 QQ-A-225/9	Anodized, MIL-A-8625 type II, class 2 Color: Grey
Cable assembly Dowel pin Set screw	CRES CRES CRES	Passivated MIL-S-5002
O-ring	Fluorosilicone	None

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

PIN: M83526/08- (dash number from table II). Shall be marked on flange of connector.

TABLE II. PIN and characteristics.

PIN M83526/08-	A	B	End type	Used on M83526/ connector
01	13.9	---	z	/2 and /10
02	11.6	1.630	x	/4
03	10.2	.185	y	/5

Patent notice: The Government does not have royalty-free license under the following patent for the benefit of manufacturers of the item, either for the Government or for use in equipment to be delivered to the Government.

Patent number	Patent expiration date
US 3,994,564	11/30/1993
US 4,054,366	10/18/1994
US 4,060,308	11/29/1994

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, SH
Air Force - 11, 17, 19, 80, 90, 99
DLA - ES

User activities:
Navy - MC, OS, YD
Air Force - 13, 14

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0065-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.