
MILITARY SPECIFICATION SHEET

CONNECTOR, ELECTRICAL, CIRCULAR, ENVIRONMENT RESISTING, BACKSHELL, STRAIGHT, 90°, AND 45° WITH DIELECTRIC STRAIN RELIEF, FOR SERIES 2 CONNECTORS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector backshell described herein shall consist of this document and the latest issue of Specification MIL-C-83723(USAF).

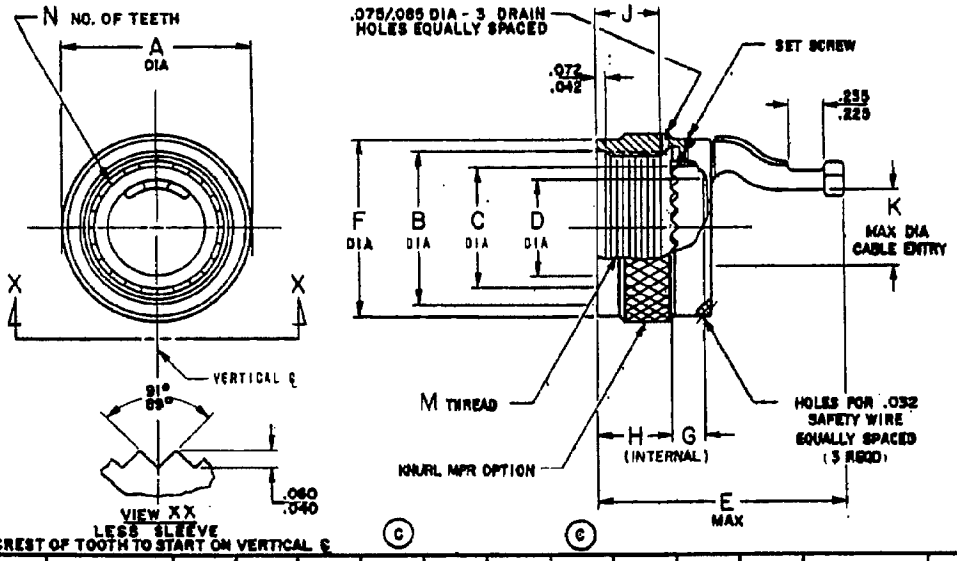


SHELL SIZE PART NO. DESIGNATION	MIL-C-5015 SIZE SHELL	A DIA MAX	B DIA	C DIA	D DIA	E MAX	F DIA MAX	G	H MAX	J	K MAX	M THREAD CLASS 2B	N OF TEETH
8	8S	.617	.445 .440	.300 .279	.255 .245	1.41	.517	.365 .335	.350	.285 .272	.240	.4375-28UNEF	8
10	10S	.734	.520 .500	.360 .341	.308 .300	1.41	.580	↑	↓	↑	.295	.500-28UNEF	10
11	10SL	.734	.520 .500	.430 .408	.388 .380	1.41	.642	↑	↓	↑	.375	.5625-24UNEF	12
13	12S	.858	.645 .625	.480 .459	.413 .405	1.47	.705	↑	.350	.285 .272	.400	.625-24UNEF	14
12	12	.858	.645 .625	.480 .459	.413 .405	1.63	.705	↑	.505	.441 .428	.400	.625-24UNEF	14
15	14S	.984	.770 .750	.584 .562	.495 .487	1.66	.830	↑	.355	.285 .272	.482	.750-20UNEF	16
14	14	.984	.770 .750	.584 .562	.495 .487	1.81	.830	↑	.510	.441 .428	.482	.750-20UNEF	16
17	16S	1.112	.895 .875	.710 .688	.614 .606	1.65	.955	↓	.350	.285 .272	.601	.875-20UNEF	20
16	16	1.112	.895 .875	.710 .688	.614 .606	1.81	.955	.365 .335	.510	.441 .428	.601	.875-20UNEF	20
18	18	1.218	1.020 1.000	.827 .805	.735 .727	1.85	1.080	.360 .350	.490	.441 .428	.722	1.000-20UNEF	24
20	20	1.345	1.145 1.125	.964 .942	.876 .867	1.99	1.205	.370 .340	.496	.441 .428	.862	1.125-18UNEF	28
22	22	1.468	1.270 1.250	1.095 1.073	.983 .976	2.11	1.330	.370 .340	.496	.441 .428	.970	1.250-18UNEF	32
24	24	1.593	1.395 1.375	1.202 1.180	1.100 1.087	2.17	1.455	.310 .280	.486	.423 .410	1.082	1.375-18UNEF	32
28	28	1.969	1.645 1.625	1.423 1.401	1.256 1.246	2.20	1.705	.310 .280	.488	.423 .410	1.241	1.625-18UNEF	36

© FIGURE 1. Type R, Straight strain relief
Rotatable support arm

FSC 5935

© DENOTES CHANGES


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

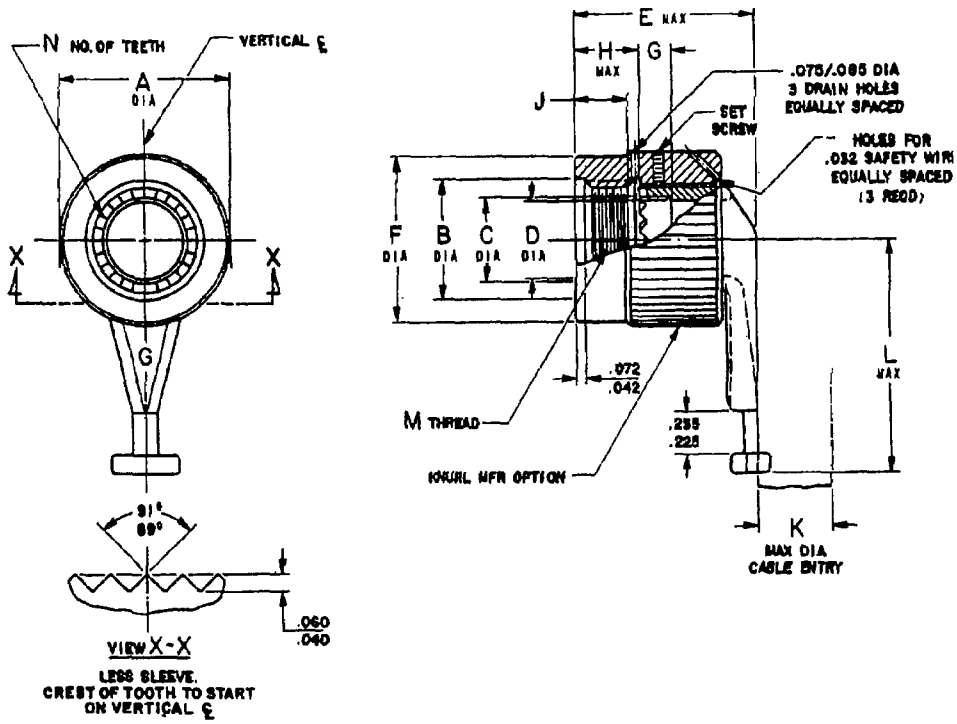

SHELL SIZE PART NO. DESIGNATION	MIL-C-5015 SIZE SHELL	A DIA MAX	B DIA	C DIA	D DIA	E MAX	F DIA MAX	G	H MAX	J	K MAX	L MAX	M THREAD CLASS 2B	N OF TEETH
8	8S	.687	.455 .440	.300 .278	.258 .245	1.060	.651	.365 .335	.350	.285 .272	.240	.88	.4375-28UNEF	8
10	10S	.782	.520 .500	.360 .341	.308 .300	↑	.676	↑	↑	↑	.295	.94	.500-28	10
11	10SL	.782	.560 .560	.430 .408	.388 .380	↓	.676		↓	↓	.375	.94	.5625-24	12
13	12S	.937	.645 .625	.480 .459	.413 .405	1.060	.812		.350	.285 .272	.400	1.00	.625-24	14
12	12	.937	.845 .625	.480 .459	.413 .405	1.215	.812		.506	.441 .428	.400	1.00	.625-24	14
16	14S	1.050	.770 .750	.584 .562	.496 .487	1.065	.926		.355	.285 .272	.482	1.32	.750-20	16
14	14	1.050	.770 .750	.584 .562	.496 .487	1.220	.926		.510	.441 .428	.482	1.32	.750-20	18
17	16S	1.239	.895 .875	.710 .688	.614 .606	1.060	1.052	↓	.350	.285 .272	.601	1.37	.875-20	20
16	16	1.239	.895 .875	.710 .688	.614 .606	1.220	1.052	.365 .335	.510	.441 .428	.601	1.37	.875-20	20
18	18	1.378	1.020 1.000	.827 .805	.735 .727	1.220	1.178	.360 .330	.490	↑	.722	1.47	1.000-20	24
20	20	1.500	1.145 1.125	.964 .942	.876 .867	1.235	1.312	.370 .340	.495	↓	.862	1.61	1.125-18	28
22	22	1.631	1.270 1.250	1.095 1.073	.983 .976	1.188	1.437	.370 .340	.495	.441 .428	.970	1.67	1.250-18	32
24	24	1.760	1.395 1.375	1.202 1.180	1.100 1.087	1.121	1.551	.310 .280	.488	.423 .410	1.082	1.64	1.375-18	32
28	28	1.921	1.645 1.625	1.423 1.401	1.256 1.246	1.121	1.760	.310 .280	.488	.423 .410	1.241	1.71	1.625-18UNEF	36

FIGURE 2. Type A, 90° strain relief

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

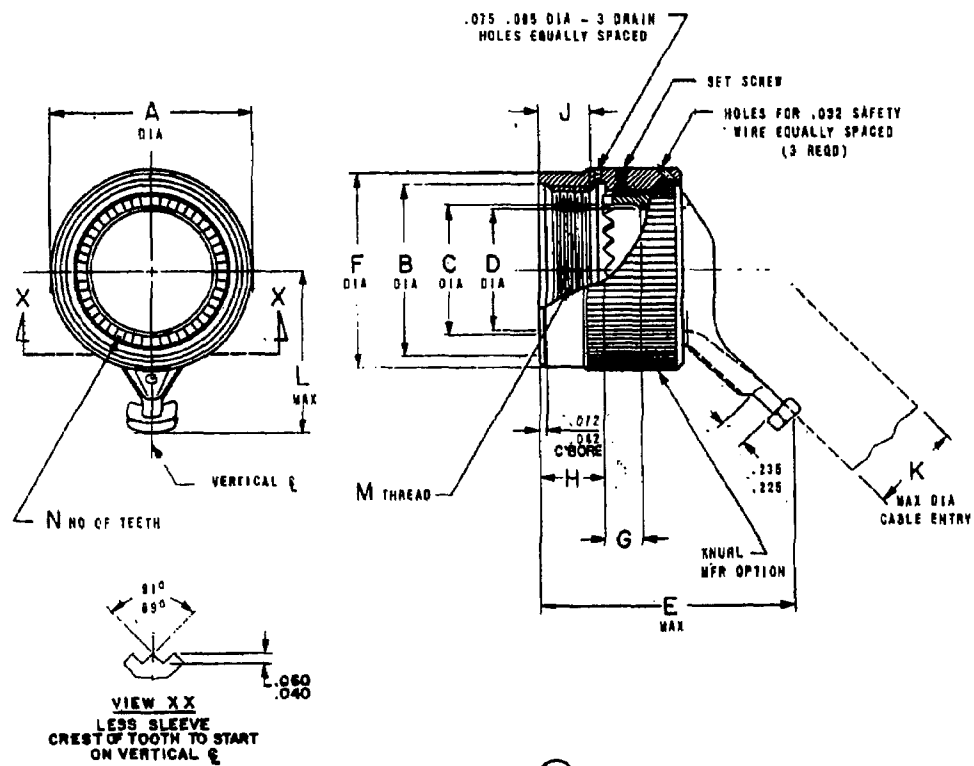

(C)

SHELL SIZE PART NO. DESIGNATION	MIL-C-5015 SIZE SHELL	A DIA MAX	B DIA	C DIA	D DIA	E MAX	F DIA MAX	G	H MAX	J	K MAX	L MAX	M THREAD CLASS 2 B	N OF TEETH
8	8S	.687	.456 .440	.300 .279	.255 .245	1.085	.551	.365 .335	.350	.285 .272	.240	.76	4376-28UNEF	8
10	10S	.782	.520 .500	.360 .341	.308 .300	↕	.676	↕	↕	↕	.295	.82	.500-28	10
11	10SL	.782	.580 .560	.430 .408	.388 .380	↕	.676	↕	↕	↕	.375	.82	.5625-24	12
13	12S	.937	.645 .625	.480 .459	.413 .405	1.086	.812	↕	.350	.285 .272	.400	.88	.625-24	14
12	12	.937	.645 .625	.480 .459	.413 .405	2.01	.812	↕	.505	.441 .428	.400	.88	.625-24	14
15	14S	1.050	.770 .750	.584 .562	.495 .487	2.37	.926	↕	.355	.285 .272	.482	1.12	.750-20	16
14	14	1.050	.770 .750	.584 .562	.495 .487	2.52	.926	↕	.510	.441 .428	.482	1.12	.750-20	16
17	16S	1.239	.895 .875	.710 .688	.614 .606	2.36	1.052	↕	.350	.285 .272	.601	1.18	.875-20	20
16	16	1.239	.895 .875	.710 .688	.614 .606	2.52	1.052	.365 .335	.510	.441 .428	.601	1.18	.875-20	20
18	18	1.378	1.020 1.000	.827 .805	.735 .727	2.86	1.176	.360 .330	.490	↕	.722	1.27	1.000-20	24
20	20	1.500	1.145 1.125	.964 .942	.875 .867	2.74	1.312	.370 .340	.495	↕	.862	1.31	1.125-18	28
22	22	1.631	1.270 1.250	1.095 1.073	.983 .975	2.74	1.437	.370 .340	.495	.441 .428	.970	1.37	1.250-18	32
24	24	1.750	1.395 1.375	1.202 1.180	1.100 1.087	2.82	1.551	.510 .280	.488	.423 .410	1.082	1.44	1.375-18	32
28	28	1.921	1.645 1.625	1.423 1.401	1.256 1.246	2.82	1.750	.310 .280	.488	.423 .410	1.241	1.87	1.625-18UNEF	36

(C)

FIGURE 3. Type B , 45° strain relief

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Requirements:

1. Type 'R', 'A' & 'B': Complete strain relief consists of an accessory nut and a follower; the accessory nut shall be captivated to, and free to rotate on, the follower. Strain relief includes one set screw for positive orientation of strain relief to connectors.

2. Materials: Aluminum Alloy per QQ-A-225 or QQ-A-591.

3. Finish: (see part no.) "N" Electroless Nickel per MIL-C-26074, Class 3, Grade A; "A" Anodic coating per MIL-A-8625, Type (optional), Class 2 black. (Dimensions apply after finishing).

4. Strain relief unit is to be used with MS-17821-1 plastic strap, MIL-T-713 lacing twine or MIL-T-43435 lacing tape.

5. Parts shall be marked in accordance with MIL-STD-1285.

6. Type 'R', 'A' & 'B': The items described herein are covered by US Patents 3,603,913 and/or 3,732,527.


7. Any portion of this standard which may be covered by copyrights owned by Glenair, Inc. is reprinted with the express permission of said company.

8. M83723/50 strain reliefs are not recommended for use with connectors containing number 8 AWG or larger conductors.

9. Preproduction tests shall consist of visual and mechanical examination (4.6.1), vibration (4.6.11) physical shock (4.6.12), and salt spray (4.4.13).

10. Acceptance Tests. Acceptance tests shall consist of visual and mechanical examination.

EXAMPLE OF PART NUMBER

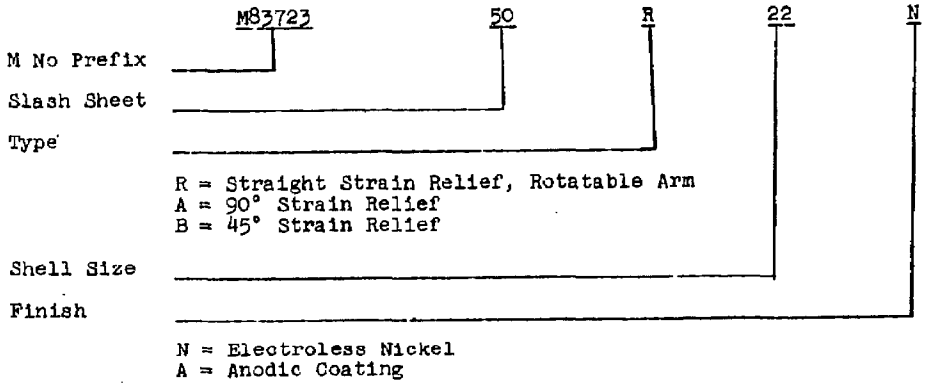

Custodian:
Air Force - 85

Preparing Activity:
Air Force - 85

Review Activities:
Air Force - 11, 70, 71, 80, 82, 84

Project No. 5935-F974

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.