
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), DUMMY CONNECTOR, RECEPTACLES (FOR MIL-C-26500 AND MIL-C-83723, SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the dummy connector receptacles described herein shall consist of this specification and the latest issue of MIL-C-83723.

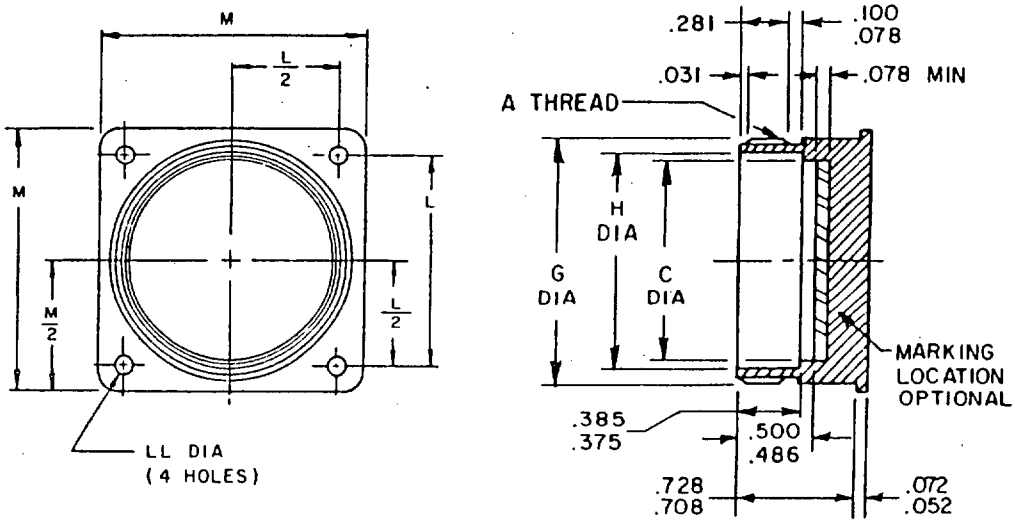

Inches	mm	Inches	mm	Inches	mm
.005	0.13	.078	1.98	.520	13.21
.009	0.23	.100	2.54	.540	13.72
.031	0.79	.281	7.14	.708	17.98
.052	1.32	.380	9.65	.728	18.49
.072	1.83	.490	12.45		

FIGURE 1. Dummy connector, receptacles, threaded coupling M83723/61-1.

© denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-28T09:21Z
Check the source to verify that this is the current version before use.


© Dummy connector, dimensions - M83723/61-1

Shell size	A UNEF-2A coupling thread	C Dia. +.005 -.000	G Dia. Max.	H Dia. +.005 -.000	L ℄ - ℄ Mtg. hole	LL Dia. Mtg. hole +.000 -.009	M Length side
8	.5625-24 (14.29)	.428 (10.87)	.561 (14.25)	.475 (12.07)	.594 (15.09)	.125 (3.18)	.812 (20.62)
10	.6875-24 (17.46)	.530 (13.46)	.696 (17.68)	.576 (14.63)	.719 (18.26)	.125 (3.18)	.937 (23.80)
12	.875-20 (22.23)	.700 (17.78)	.875 (22.23)	.746 (18.95)	.812 (20.62)	.125 (3.18)	1.031 (26.19)
14	.9375-20 (23.81)	.769 (19.53)	.935 (23.75)	.815 (20.70)	.906 (23.01)	.125 (3.18)	1.125 (28.58)
16	1.0625-18 (26.99)	.896 (22.76)	1.062 (26.97)	.942 (23.93)	.969 (24.61)	.125 (3.18)	1.250 (31.75)
18	1.1875-18 (30.16)	1.002 (25.45)	1.187 (30.15)	1.048 (26.62)	1.062 (26.97)	.125 (3.18)	1.343 (34.11)
20	1.3125-18 (33.34)	1.127 (28.63)	1.312 (33.32)	1.171 (29.74)	1.156 (29.36)	.125 (3.18)	1.437 (36.50)
22	1.4375-18 (36.51)	1.252 (31.80)	1.437 (36.50)	1.297 (32.94)	1.250 (31.75)	.125 (3.18)	1.562 (39.67)
24	1.5625-18 (39.69)	1.377 (34.98)	1.562 (39.67)	1.420 (36.07)	1.375 (34.93)	.154 (3.91)	1.703 (43.26)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerances shall be ±.005.
5. These parts are intended for use as dummy storage receptacles for MIL-C-83723, series III, and MIL-C-26500 threaded coupled connector plugs.

FIGURE 1. Dummy connector, receptacles, threaded coupling M83723/61-1 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

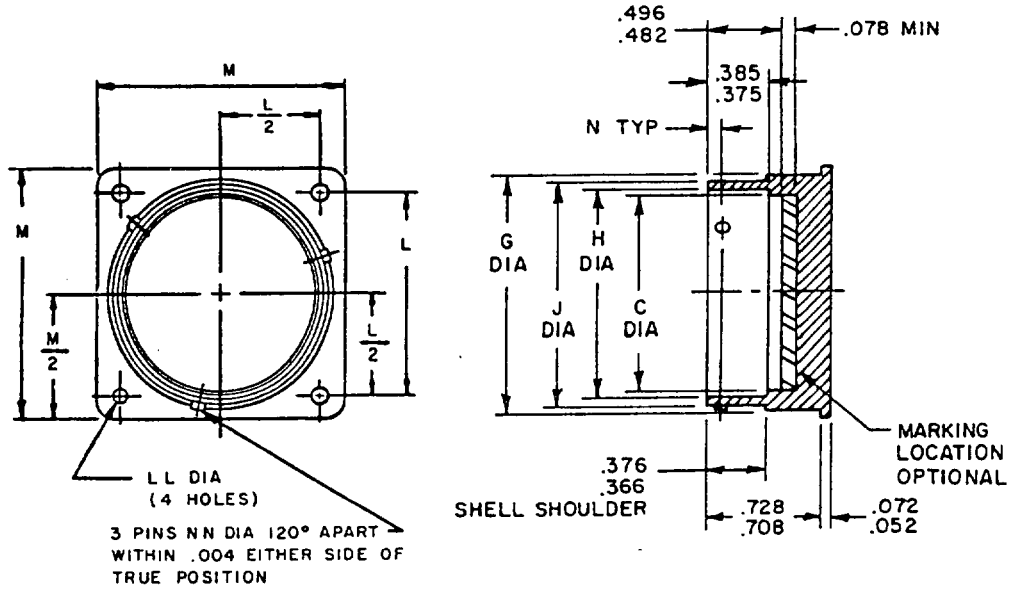

Inches	mm	Inches	mm	Inches	mm
.003	0.08	.072	1.83	.540	13.72
.004	0.10	.366	9.30	.560	14.22
.005	0.13	.376	9.55	.708	17.98
.009	0.23	.380	9.65	.728	18.49
.052	1.32	.490	12.45		

FIGURE 2. Dummy connector, receptacles, bayonet coupling M83723/61-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

© Dummy connector, dimensions - M83723/61-2

Shell size	C Dia. +.005 -.000	G Dia. Max.	H Dia. +.005 -.000	J Dia. +.000 -.005	L ℄ - ℄ Mtg. hole	LL Dia. Mtg. hole +.000 -.009	M Length side	N +.000 -.004	NN Dia. +.000 -.003
8	.428 (10.87)	.561 (14.25)	.475 (12.07)	.536 (13.61)	.594 (15.09)	.125 (3.18)	.812 (20.62)	.101 (2.57)	.078 (1.98)
10	.530 (13.46)	.696 (17.68)	.576 (14.63)	.659 (16.74)	.719 (18.26)	.125 (3.18)	.937 (23.80)	.094 (2.39)	.093 (2.36)
12	.700 (17.78)	.875 (22.23)	.746 (18.59)	.829 (21.06)	.812 (20.62)	.125 (3.18)	1.031 (26.19)	.094 (2.39)	.093 (2.36)
14	.769 (19.53)	.935 (23.75)	.815 (20.70)	.898 (22.81)	.906 (23.01)	.125 (3.18)	1.125 (28.58)	.094 (2.39)	.093 (2.36)
16	.896 (22.76)	1.062 (26.97)	.942 (23.93)	1.025 (26.04)	.969 (24.61)	.125 (3.18)	1.250 (31.75)	.094 (2.39)	.093 (2.36)
18	1.002 (25.45)	1.187 (30.15)	1.048 (26.62)	1.131 (28.73)	1.062 (26.97)	.125 (3.18)	1.343 (34.11)	.094 (2.39)	.093 (2.36)
20	1.127 (28.63)	1.312 (33.32)	1.171 (29.74)	1.256 (31.90)	1.156 (29.36)	.125 (3.18)	1.437 (36.50)	.094 (2.39)	.093 (2.36)
22	1.252 (31.80)	1.437 (36.50)	1.297 (32.94)	1.381 (35.08)	1.250 (31.75)	.125 (3.18)	1.562 (39.67)	.094 (2.39)	.093 (2.36)
24	1.377 (34.98)	1.562 (39.67)	1.420 (36.07)	1.506 (38.25)	1.375 (34.93)	.154 (3.91)	1.703 (43.26)	.094 (2.39)	.093 (2.36)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerances shall be ±.005 (0.13 mm).
5. These parts are intended for use as dummy storage receptacles for MIL-C-83723, Series III, and MIL-C-26500 bayonet coupled connector plugs.
6. Coupling assurance indicator shall be provided in accordance with MIL-C-83723.

FIGURE 2. Dummy connector, receptacles, bayonet coupling M83723/61-2 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Material:

Dummy connector: Aluminum alloy.

© Gasket: Silicone elastomer. Gasket shall be bonded to or mechanically retained in receptacle.

A - 200°C, black anodize, nonconductive in accordance with MIL-A-8625, type II, class 2. Finish "A" shall be used in all applications not requiring an electrically conductive finish.

© R - 200°C electrically conductive electroless nickel per MIL-C-26074, class 3 or 4, grade B. Not for Navy use. Air Force use for space application only.

© W - 175°C, olive drab, cadmium in accordance with QQ-P-416 over a suitable underplate to withstand 500 hours salt spray test. Final finish shall be electrically conductive.

All diameters to be concentric with each other within .015 T.I.R.

All diameters in the same plane to be concentric with each other within .004 T.I.R.

Marking:

Part number: M83723/61- (and dash number from figure 1 or 2), shell size, and the applicable code for finish.

EXAMPLE: M 83723/61- 1 10 A

Military designation

Specification sheet number

Dash number

Shell size

Finish

© Supersession data: See table I.

Qualification:

Examination of product.

Coupling torque.

Humidity.

Salt spray (corrosion).

Air leakage: Per MIL-STD-1344, method 1008, with the following conditions:

Use connector without contacts or insert installed.

Pressure differential: 10 PSI.

Air leakage rate shall not exceed 1 atmospheric cubic inch per hour (4.55×10^{-3} cm^3/s).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

© TABLE I. Supersession data.

Superseding part number M83723/61-1	Superseded part number MS27296-
8A	7
10A	1
12A	2
14A	3
16A	4
18A	5
20A	8
22A	6
24A	9

Superseding part number M83723/61-2	Superseded part number MS27297-
8A	7
10A	1
12A	2
14A	3
16A	4
18A	5
20A	8
22A	6
24A	9

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 80, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3584)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.