INCH-POUND

MIL-C-83723/61D
17 Dec 1991
SUPERSEDING
MIL-C-83723/61C
30 June 1988

MILITARY SPECIFICATION SHEET

(D) CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), DUMMY CONNECTOR, RECEPTACLES (FOR MIL-C-26500 AND MIL-C-83723, SERIES III, CLASSES A, R, & W)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(D) The requirements for acquiring the product described herein shall consist of this specification and the issue of following specification listed in that issue of Department of Defense Index of specifications and Standards (DODISS) specified in the solication: MIL-C-83723.

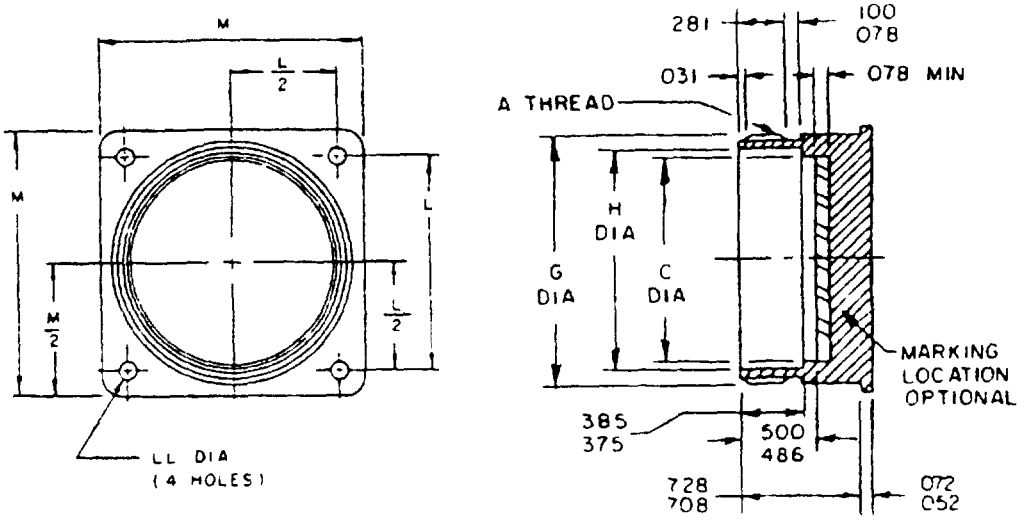


FIGURE 1. Dummy, receptacles, threaded coupling M83723/61-1.

(D) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.005	0.13	.078	1 98	.486	12 34
.009	0.23	.100	2.54	.500	12.70
.031	0.79	.281	7.14	.708	17.98
.052	1.32	.375	9.53	.728	18.49
.072	1.83	.385	9.78		


Dummy connector, dimensions - M83723/61-1.

Shell size	A UNEF-2A coupling thread	C dia. +.005 -.000	G dia. (max.)	H dia. +.005 -.000	L C - C mtg. hole	LL dia. mtg. hole +.000 -.009	M length side
8	.5625-24 (14.29)	.428 (10.87)	.561 (14.25)	.475 (12.07)	.594 (15.09)	.125 (3.18)	.812 (20.62
10	.6875-24 (17.46)	.530 (13.46)	.696 (17.68)	576 (14.63)	.719 (18 26)	.125 (3.18)	.937 (23.80)
12	.875-20 (22.23)	.700 (17.78)	.875 (22.23)	.746 (18.95)	.812 (20.62)	125 (3.18)	1.031 (26.19)
14	.9375-20 (23.81)	.769 (20.22)	.935 (23.75)	.815 (20.70)	.906 (23.01)	.125 (3.18)	1.125 (28.58)
16	1.0626-18 (26.99)	.869 (22.76)	1.062 (26.97)	.942 (23.93)	.969 (24.61)	.125 (3.18)	1.250 (31.75)
18	1.1875-18 (30.16)	1.002 (25.45)	1.187 (30.15)	1.048 (26.62)	1.062 (26 97)	.125 (3.18)	1.343 (34 11)
20	1.3125-18 (33.34)	1.127 (28.63)	1.312 (33.32)	1.171 (29.74)	1.156 (29.36)	.125 (3.18)	1.437 (36 50)
22	1.4375-18 (36.51)	1.252 (31.80)	1.437 (36.50)	1.297 (32.94)	1.250 (31 75)	.125 (3.18)	1.562 (39.67)
24	1.5625-18 (39.67)	1.377 (34.98)	1.562 (39.67)	1 420 (36.07)	1.375 (34.93)	154 (3.91)	1 703 (43.26)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance shall be ±.005.
5 These parts are intended for use as dummy storage receptacles for MIL-C-83723, series III and MIL-C-26500 threaded coupling connector plugs.

FIGURE 1. Dummy, receptacles, threaded coupling M83723/61-1 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

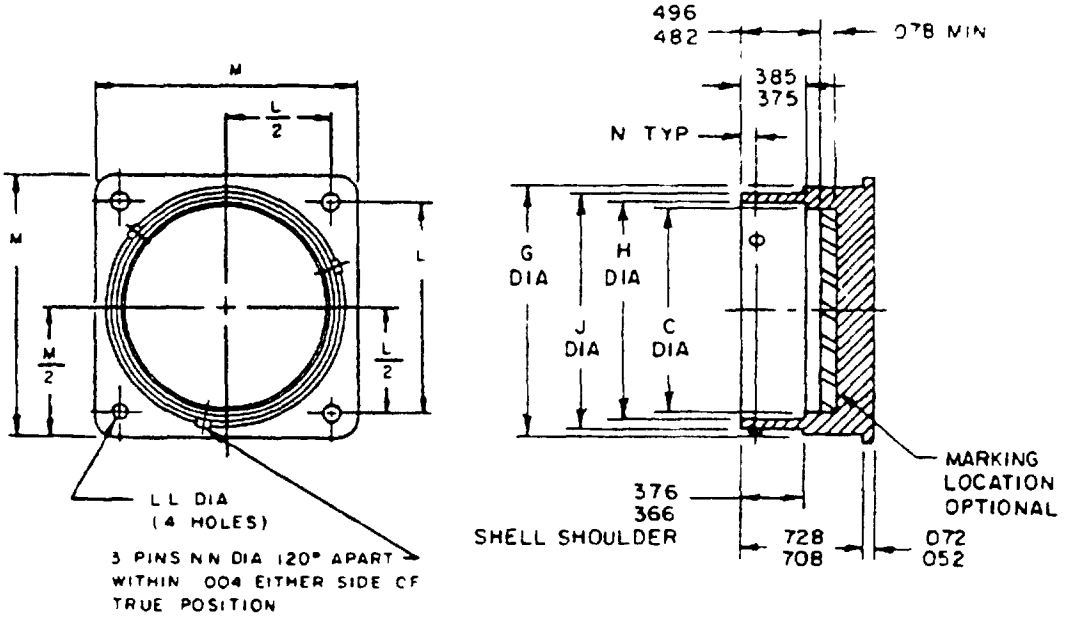

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.052	1.32	.375	9.53	708	17.98
.004	0.10	.072	1.83	385	9.78	.728	18.49
.005	0.13	.366	9 30	482	12.24		
.009	0.23	.376	9.55	496	12.60		

FIGURE 2. Dummy, receptacles, bayonet coupling M83723/61-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Dummy connector, dimensions - M83723/61-2.

Shell size	C dia. + 005 -.000	G dia. (max.)	H dia. +.005 -.000	J dia. + 000 -.005	L C - C mtg. hole	LL dia. mtg. hole + 000 - 009	M length side	N +.000 -.004	NN dia. + 000 - 003
8	.428 (10.87)	.561 (14.25)	475 (12.07)	.536 (13.61)	.594 (15.09)	125 (3.18)	.812 (20.62)	101 (2.57)	078 (1.98)
10	.530 (13.46)	.696 (17.68)	.576 (14.63)	.659 (16.74)	719 (18.26)	.125 (3.18)	.937 (23.80)	.094 (2.39)	093 (2.36)
12	.700 (17.78)	.875 (22.23)	.746 (18.95)	.829 (21.06)	.812 (20.62)	.125 (3.18)	1.031 (26.19)	.094 (2.39)	.093 (2.36)
14	.769 (20.22)	.935 (23.75)	.815 (20.70)	.898 (22.81)	.906 (23.01)	.125 (3.18)	1 125 (28.58)	.094 (2.39)	.093 (2 36)
16	.869 (22.76)	1.062 (26.97)	.942 (23.93)	1 025 (26.04)	.969 (24.61)	.125 (3.18)	1.250 (31.75)	094 (2.39)	.093 (2.36)
18	1.002 (25.45)	1.187 (30.15)	1.048 (26.62)	1.131 (28.73)	1.062 (26.97)	.125 (3.18)	1.343 (34.11)	.094 (2.39)	.093 (2.36)
20	1.127 (28.63)	1.312 (33.32)	1.171 (29.74)	1.256 (31.90)	1.156 (29.36)	.125 (3.18)	1.437 (36.50)	.094 (2.39)	.093 (2.36)
22	1.252 (31.80)	1.437 (36.50)	1.297 (32.94)	1.381 (35.08)	1.250 (31.75)	.125 (3.18)	1.562 (39.67)	.094 (2.39)	.093 (2.36)
24	1.377 (34 98)	1.562 (39.67)	1.420 (36.07)	1.506 (38.25)	1.375 (34.93)	.154 (3.91)	1.703 (43 26)	094 (2.39)	093 (2.36)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses
4. Unless otherwise specified, tolerance shall be ±.005.
5. These parts are intended for use as dummy storage receptacles for MIL-C-83723, series III and MIL-C-26500 bayonet coupled connector plugs.
6. Coupling assurance indicator shall be provided in accordance with MIL-C-83723.

FIGURE 2. Dummy, receptacles, bayonet coupling M83723/61-2 - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations. See figures 1 and 2.

Material:

Dummy connector: Aluminum alloy

Gasket shall be bonded to or mechanically retained in receptacle.

All diameters to be concentric with each other within .015 T.I.R.

All diameters in the same plane to be concentric with each other within .004 T.I.R.

Qualification:

Examination of product.

Coupling torque.

Humidity.

Salt spray (corrosion).

Air leakage: In accordance with MIL-STD-1344, method 1008, with the following conditions:

Use connector without contacts or insert installed.

Pressure differential: 10 psi.

Air leakage rate shall not exceed 1 atmospheric cubic inch per hour (4.55 x $3cm^3/s$).

Marking:
Part or Identifying Number (PIN): M83723/61- (and dash number figure 1 or 2), shell size, and the applicable code for finish.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

Supersession data: See table I.

TABLE I. Supersession data

Superseding PIN M83723/61-1	Superseding PIN MS27296-
8AR	7
10AR	1
12AR	2
14AR	3
16AR	4
18AR	5
20AR	8
22AR	6
24AR	9
Superseding PIN M83723/61-2	**Superseding PIN MS27297-**
8AR	7
10AR	1
12AR	2
14AR	3
16AR	4
18AR	5
20AR	8
22AR	6
24AR	9

D PIN example:

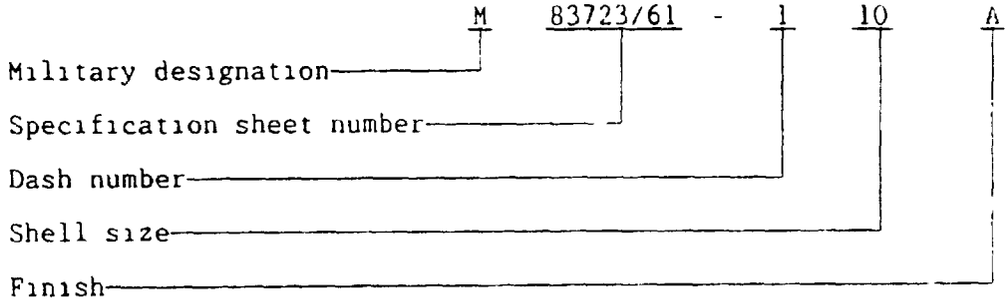

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 80, 99
DLA - ES

Preparing activity
Air Force - 85

Agent:
DLA - ES

(Project 5935-3728-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.