
MIL-C-83723/77A
13 NOV 1975
SUPERSEDING
MIL-C-83723/77(USAF)
9 September 1971


MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (RFI, BAYONET COUPLING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES G AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

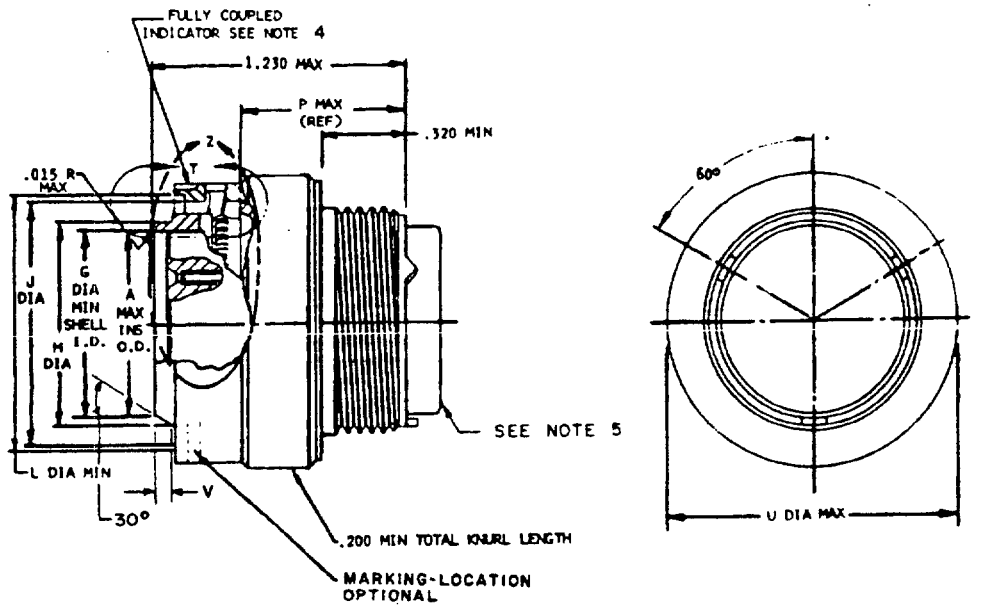

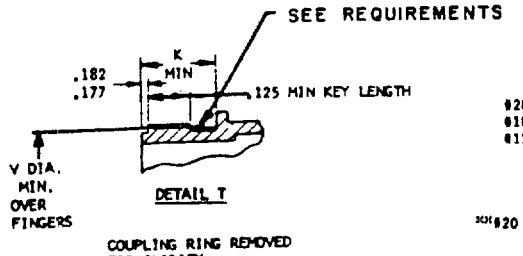


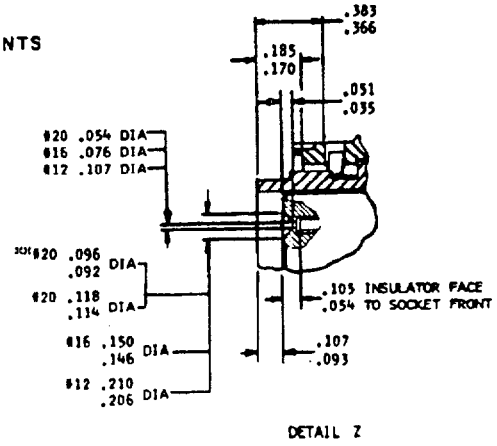

XX SEE TABLE II FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

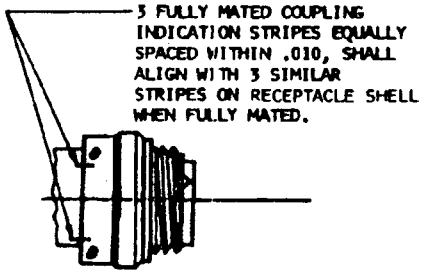

COUPLED POSITION

TABLE I. Connector dimensions.

SIZE	A	G	H	J	K	L	M	N	P	R	U	V
8	.312	.352	.424 .419	.540 .545	.552	.632	.234 .231	.632	.678	.087 .081	.776	.025
10	.388	.428	.526 .521	.662 .667	.552	.760	.285 .282	.760	.678	.087 .081	.906	.031
12	.558	.598	.696 .691	.832 .837	.552	.930	.370 .367	.930	.678	.087 .081	1.078	.031
14	.627	.667	.765 .760	.901 .906	.552	.999	.405 .402	.999	.678	.087 .081	1.141	.031
16	.772	.794	.892 .887	1.028 1.033	.552	1.126	.468 .465	1.126	.678	.118 .112	1.266	.031
18	.860	.900	.998 .993	1.134 1.139	.552	1.232	.521 .518	1.232	.678	.118 .112	1.375	.031
20	.985	1.025	1.123 1.118	1.261 1.266	.552	1.357	.583 .580	1.357	.678	.118 .112	1.510	.031
22	1.110	1.150	1.248 1.243	1.384 1.389	.552	1.482	.646 .643	1.482	.678	.118 .112	1.625	.031
24	1.235	1.275	1.373 1.368	1.511 1.516	.552	1.607	.708 .705	1.607	.678	.118 .112	1.760	.031

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

TABLE II. Insert arrangements requiring reduced diameters for lead-in chamfer on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3
10	-6	1, 2, 3, 4, 5, 6

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.010	.25	.206	5.23	.540	13.72	.837	21.26	1.150	29.21
.015	.38	.210	5.33	.545	13.84	.860	21.84	1.230	31.24
.035	.89	.231	5.87	.552	14.02	.887	22.53	1.232	31.29
.051	1.30	.234	5.94	.558	14.17	.892	22.66	1.235	31.37
.054	1.37	.282	7.16	.580	14.73	.900	22.86	1.243	31.57
.076	1.93	.285	7.24	.583	14.81	.901	22.89	1.248	31.70
.081	2.06	.312	7.92	.598	15.19	.906	23.01	1.261	32.03
.087	2.21	.320	8.13	.627	15.93	.930	23.62	1.266	32.16
.092	2.34	.352	8.94	.632	16.05	.985	25.02	1.275	32.39
.093	2.36	.366	9.30	.643	16.33	.993	25.22	1.357	34.47
.096	2.44	.367	9.32	.646	16.41	.998	25.35	1.368	34.75
.105	2.67	.370	9.40	.662	16.81	.999	25.37	1.373	34.87
.107	2.72	.383	9.73	.667	16.94	1.025	26.04	1.375	34.93
.112	2.84	.388	9.86	.678	17.22	1.028	26.11	1.384	35.15
.114	2.90	.402	10.21	.691	17.55	1.033	26.24	1.389	35.28
.118	3.00	.405	10.29	.696	17.68	1.078	27.38	1.482	37.64
.125	3.18	.419	10.64	.705	17.91	1.110	28.19	1.510	38.35
.146	3.71	.424	10.77	.708	17.98	1.118	28.40	1.511	38.38
.150	3.81	.428	10.87	.760	19.30	1.123	28.52	1.516	38.51
.170	4.32	.465	11.81	.765	19.43	1.126	28.60	1.607	40.82
.177	4.50	.468	11.89	.766	19.46	1.134	28.80	1.625	41.28
.182	4.62	.518	13.16	.772	19.61	1.139	28.93	1.760	44.70
.185	4.70	.521	13.23	.794	20.17	1.141	28.98	2.334	59.28
.200	5.08	.526	13.36	.832	21.13				

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1°.
4. Fully mated coupling indication stripes and polarization stripes shall be color coded blue. Stripes shall be .025 ±.010 wide.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.


This connector mates with MIL-C-83723/72, 74, 79, 80, 81, 93, and 94.

For insert arrangements see MIL-STD-1554.

Mating forces: Shall not exceed the values specified in the procurement document by more than 20 percent.

RFI spring strip shall have a minimum of six fingers per inch and shall point to rear of connector.

Part number example:

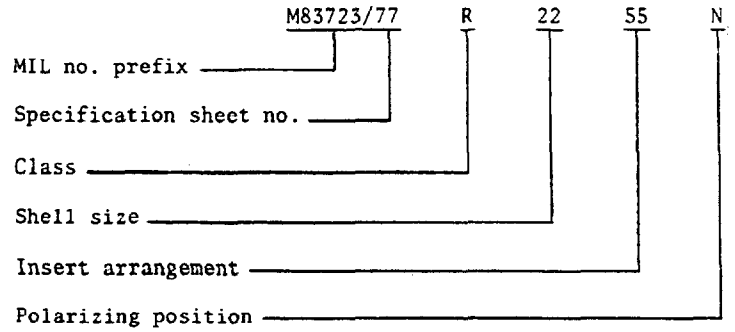

Custodians:
Army - EL
Navy - AS
Air Force - 85

Review activities:
Army - MI, MU
Navy - EC
Air Force - 11, 15, 17, 80
DSA - ES

User activities:
Army -
Navy -
Air Force -

Preparing activity:
Air Force - 85

(Project 5935-1948-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318



AFLC/MMGE/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-c-83723/77A Connectors, Electrical (Circular, Environment Resisting

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER PSC 5935

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.