INCH-POUND

MIL-C-83723/80B
27 December 1991

SUPERSEDING
MIL-C-83723/80A
13 NOV 1975

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SOLDER FLANGE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT), (SERIES III, CLASSES H AND Y)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(B) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83723.

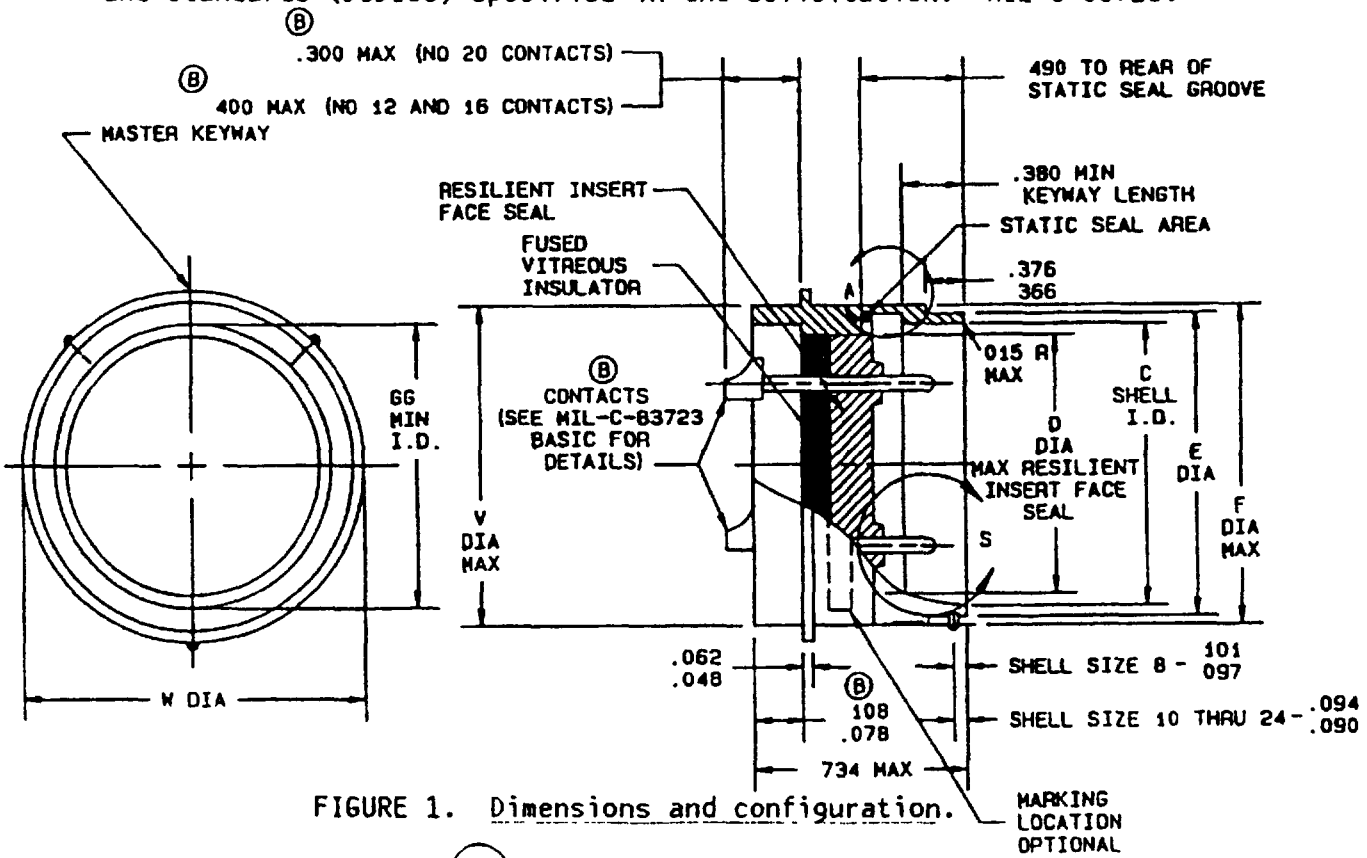


FIGURE 1. Dimensions and configuration.

(B) denotes changes

DISTRIBUTION STATMENT A. Approved for public release; distribution is unlimted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

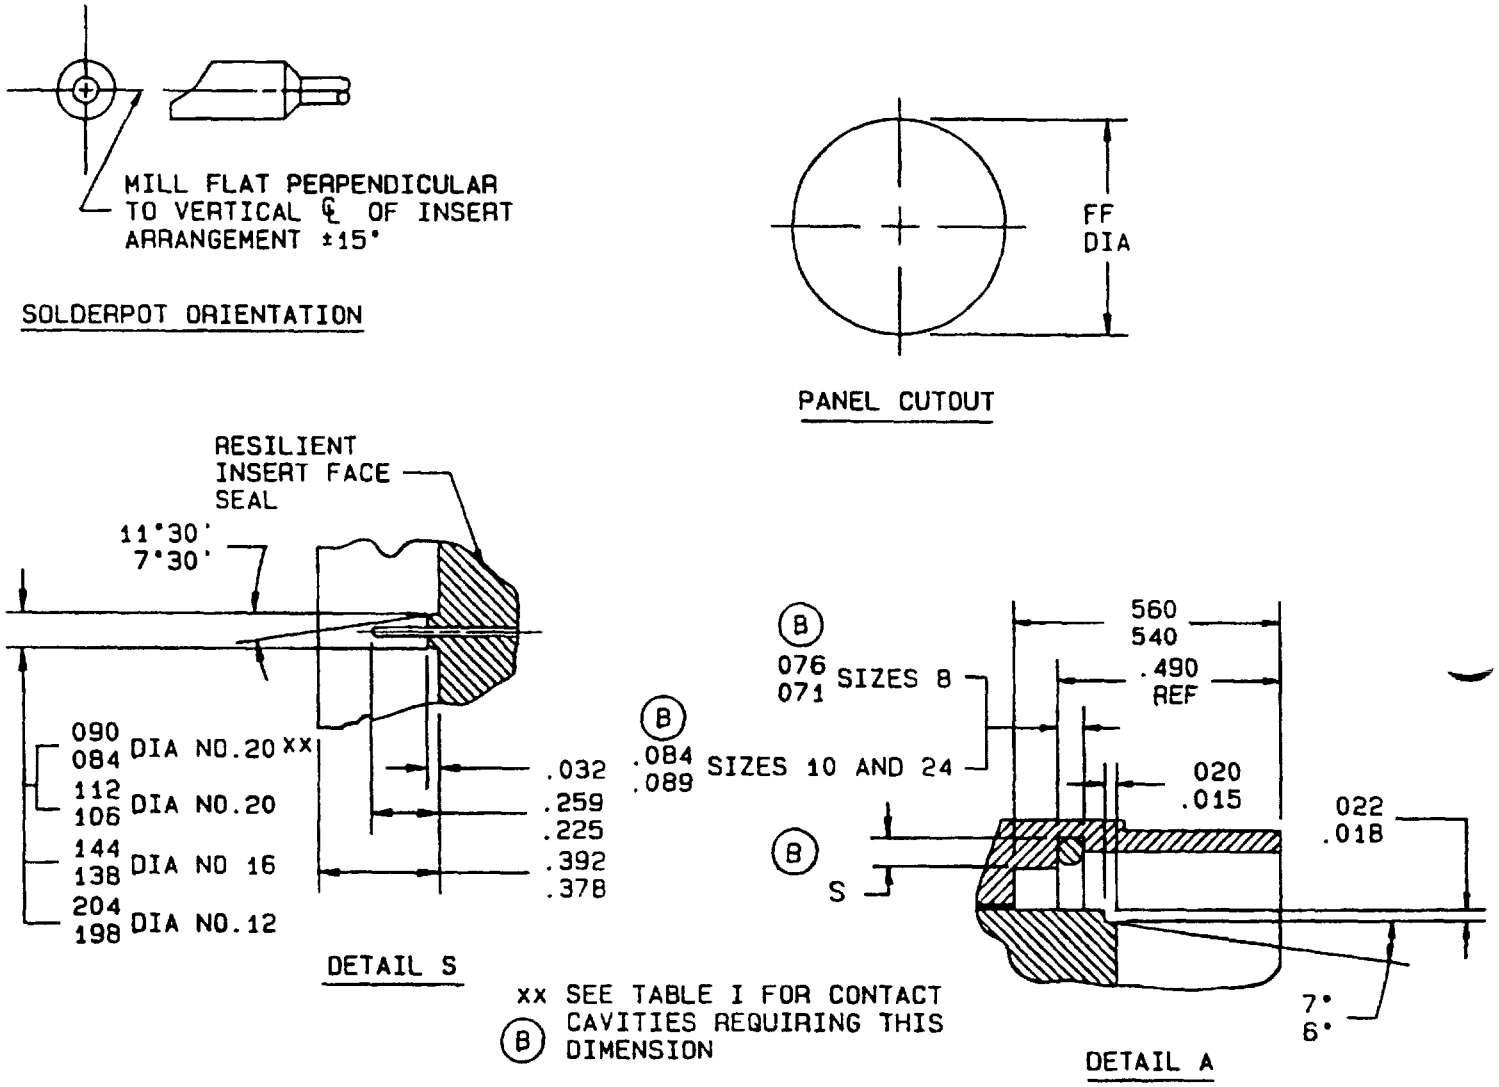


FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

B

Shell size	C	D	E	F	S	V	W	FF	GG
8	.428 .433	.312	.536 .531	.561	.508	.500	.760 .720	.505 .515	.406
10	.530 .535	.388	.659 .654	.696	.636	.562	.860 .820	.567 .577	.443
12	.700 .705	.558	.829 .824	.875	.806	.750	1.065 1.025	.755 .765	.668
14	.769 .774	.627	.898 .893	.935	.875	.812	1.110 1.070	.817 .827	.668
16	.896 .901	.772	1.025 1.020	1.062	1.002	.937	1.230 1.190	.942 .952	.763
18	1.002 1.007	.860	1.131 1.126	1.187	1.108	1.062	1.360 1.320	1.067 1.077	.862
20	1.127 1.132	.985	1.256 1.251	1.312	1.233	1.187	1.450 1.410	1.192 1.202	1.108
22	1.252 1.257	1.110	1.381 1.376	1.437	1.358	1.312	1.610 1.570	1.317 1.327	1.204
24	1.377 1.382	1.235	1.506 1.501	1.562	1.483	1.437	1.730 1.690	1.442 1.452	1.388

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.330	8.38	.636	16.15	.898	22.81	1.235	31.37
.004	0.10	.366	9.30	.654	16.61	.901	22.89	1.251	31.78
.005	0.13	.376	9.55	.659	16.74	.935	23.75	1.252	31.80
.015	0.38	.378	9.60	.668	16.97	.937	23.80	1.256	31.90
.018	0.48	.380	9.65	.696	17.68	.942	23.93	1.257	31.93
.020	0.51	.388	9.86	.700	17.78	.952	24.18	1.312	33.32
.022	0.56	.392	9.96	.705	17.92	.985	25.02	1.317	33.45
.032	0.81	.400	10.16	.720	18.29	1.002	25.45	1.320	33.53
.048	1.22	.406	10.31	.734	18.64	1.007	25.58	1.327	33.71
.062	1.57	.428	10.87	.750	19.05	1.020	25.91	1.358	34.49
.071	1.80	.433	11.00	.755	19.18	1.025	26.04	1.360	34.54
.076	1.93	.443	11.25	.760	19.30	1.062	26.97	1.376	34.95
.078	1.98	.490	12.45	.763	19.38	1.065	27.05	1.377	34.98
.084	2.13	.500	12.70	.765	19.43	1.067	27.10	1.381	35.08
.089	2.26	.505	12.83	.769	19.53	1.070	27.18	1.382	35.10
.090	2.29	.508	12.90	.772	19.61	1.077	27.36	1.388	35.26
.094	2.39	.515	13.08	.774	19.66	1.108	28.14	1.410	35.81
.097	2.46	.530	13.46	.806	20.47	1.110	28.19	1.437	36.50
.101	2.57	.531	13.49	.812	20.62	1.126	28.60	1.442	36.63
.106	2.69	.535	13.51	.817	20.75	1.127	28.63	1.450	36.83
.108	2.74	.536	13.61	.820	20.83	1.131	28.73	1.452	36.88
.112	2.84	.540	13.72	.824	20.93	1.132	28.75	1.483	37.67
.138	3.51	.558	14.17	.827	21.01	1.187	30.15	1.501	38.13
.144	3.66	.560	14.22	.829	21.06	1.190	30.23	1.506	38.25
.198	5.03	.561	14.25	.860	21.84	1.192	30.28	1.562	39.67
.204	5.18	.562	14.27	.862	21.98	1.202	30.53	1.570	39.89
.225	5.72	.567	14.40	.875	22.23	1.204	30.58	1.610	40.89
.259	6.58	.577	14.66	.893	22.68	1.230	31.24	1.690	42.93
.312	7.92	.627	15.93	.896	22.76	1.233	31.32	1.730	43.94

(B) NOTES:

1. Metric equivalents are given for general information only.
2. Dimensions are in inches. Dimensions apply after plating.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals and and ±1 for all angles.
4. Notes 5 through 11 applicable to contact only.
5. Dimensions apply after plating.
6. 63 all over in accordance with ANSI 46.1-62 unless otherwise specified.
7. Remove all burrs and sharp edges .003 to .005 R.
8. Diameters to be concentric within .004 TIR.
9. Diameter in the same cross-sectional plane to be concentric with each other within .003 TIR.
10. The centerline of indicated projection must be located on vertical centerline within 2 degrees.
11. Contact finish: Gold plate .000050 inch min. In accordance with MIL-G-45204. A suitable underplating shall be used. Silver shall not be used. Finish is applied after sealing.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.


This connector mates with MIL-C-83723/75 and 77.

(B) For insert arrangements, see MIL-STD-1554 and table I.

TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	(B) 03	1, 2, and 3
10	(B) 06	1, 2, 3, 4, 5, 6

(B) Part or Identifying Number (PIN) example:

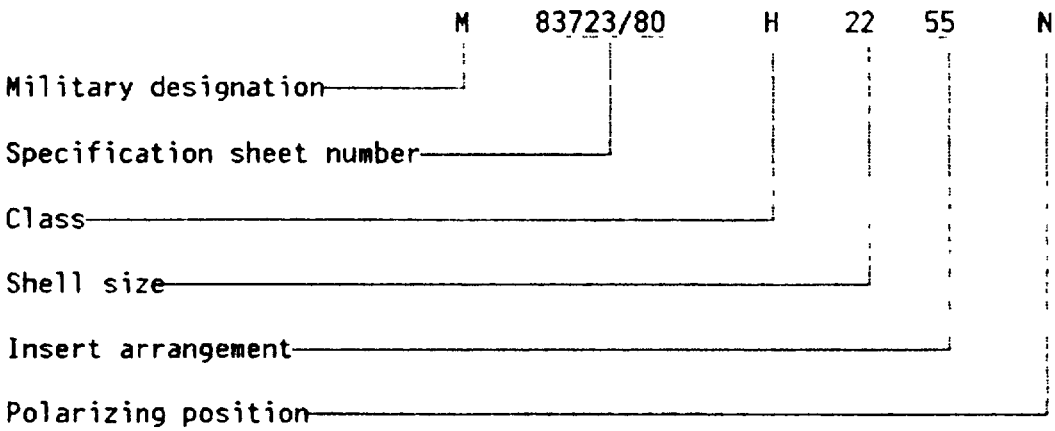

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 80
DLA - ES

Preparing activity
Air Force - 85

Agent:
DLA -ES

(Project 5935-3728-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.