
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (FLANGE MOUNT, THREADED COUPLING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES A, G, K, N, R, S, AND W)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification sheet and the latest issue of MIL-C-83723.

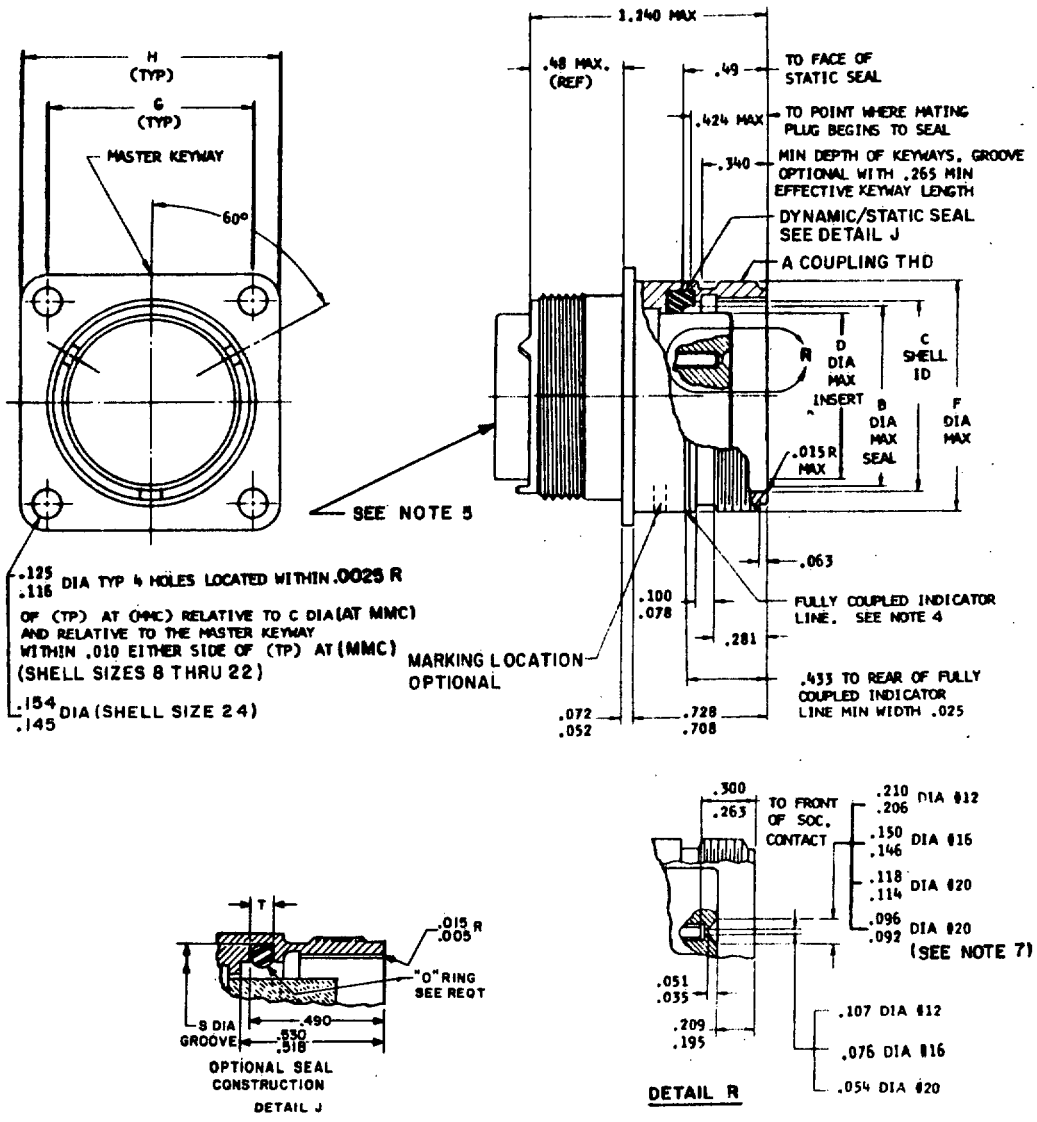


Ⓒ FIGURE 1. Classes A, G, K, R and W.

Ⓒ denotes changes


Source: https://assist.dla.mil - Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

FSC 5935

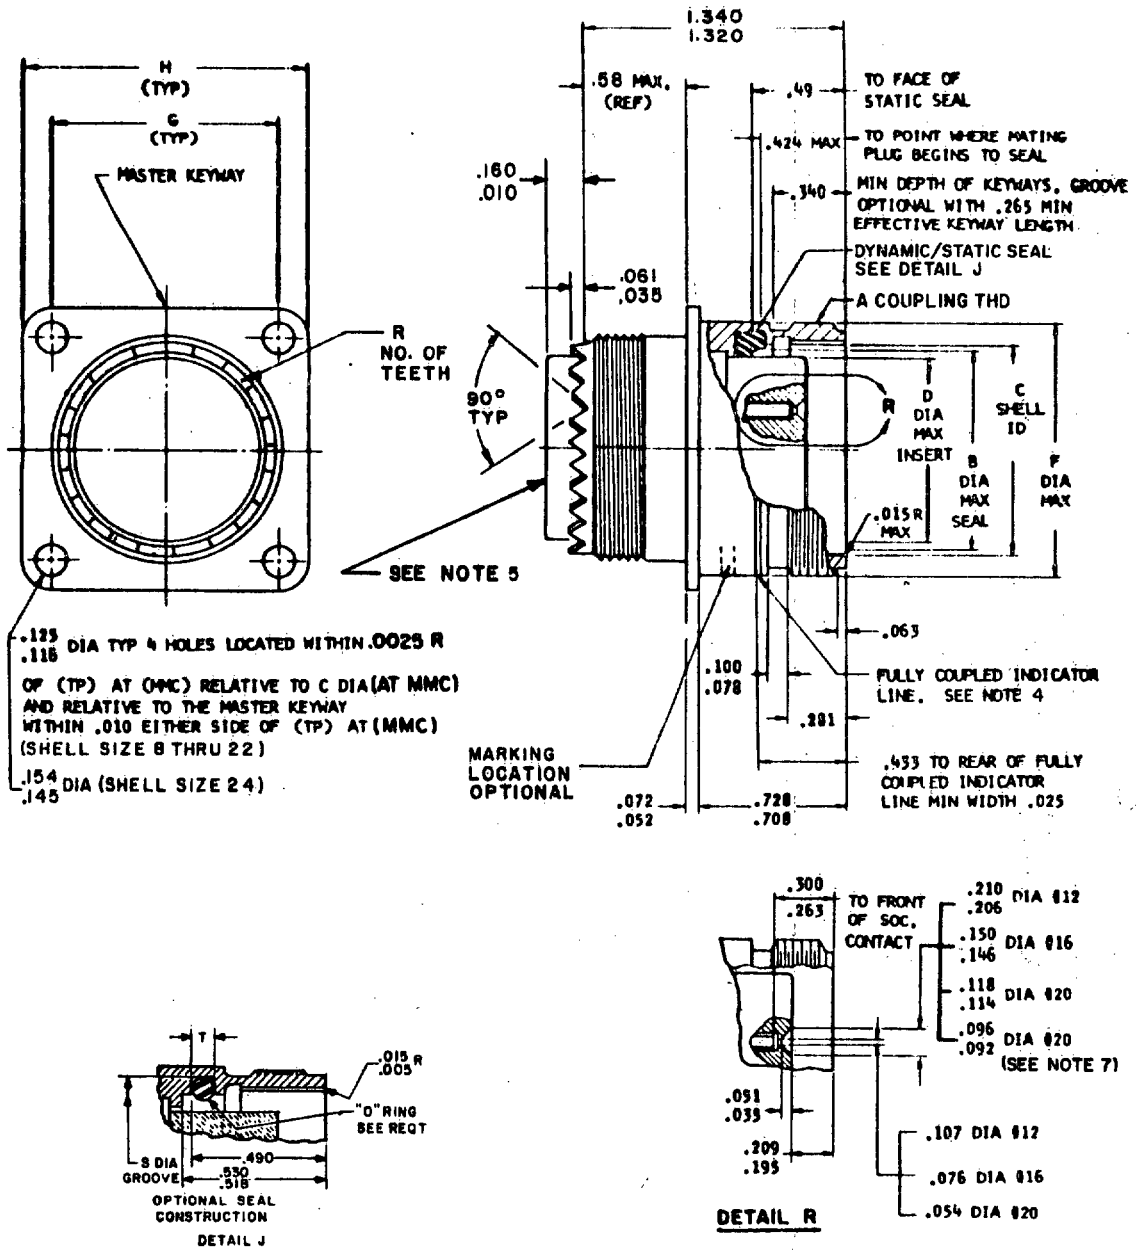

© FIGURE 2. Classes N and S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

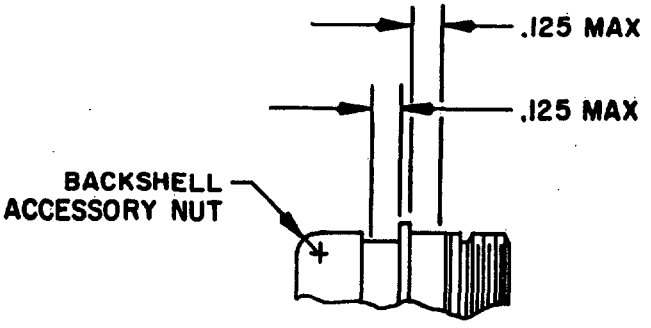

MAX PANEL THICKNESS (TYP)

.116 MIN CLEARANCE BETWEEN .125 PANEL AND COUPLING RING WHEN MOUNTING FLANGE IS IN BACK OF THE PANEL.

Connector dimensions.

Shell size	A thread	B	C	D	F	G	H	R	S +.005 -.000	T
8	.562-24 UNEF-2A	.398	.418 .413	.290	.562	.594	.812	12	.490	.076 .071
10	.688-24 UNEF-2A	.519	.535 .530	.388	.696	.719	.937	15	.636	.089 .084
12	.875-20 UNEF-2A	.689	.705 .700	.558	.875	.812	1.031	21	.806	
14	.938-20 UNEF-2A	.758	.774 .769	.627	.936	.906	1.125	24	.875	
16	1.062-18 UNEF-2A	.885	.901 .896	.772	1.062	.969	1.250	30	1.002	
18	1.188-18 UNEF-2A	.991	1.007 1.002	.860	1.187	1.062	1.343	33	1.108	
20	1.312-18 UNEF-2A	1.116	1.132 1.127	.985	1.312	1.156	1.437	36	1.233	
22	1.438-18 UNEF-2A	1.241	1.257 1.252	1.110	1.437	1.250	1.562	39	1.358	
24	1.562-18 UNEF-2A	1.366	1.382 1.377	1.235	1.562	1.375	1.703	42	1.483	.089 .084

Ⓒ FIGURE 3. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.0025	.063	.118	3.00	.48	12.2	.772	19.61	1.127	28.63
.005	.08	.125	3.18	.480	12.19	.774	19.66	1.132	28.75
.010	.25	.145	3.68	.49	12.4	.806	20.47	1.156	29.36
.015	.38	.146	3.71	.490	12.45	.812	20.62	1.187	30.15
.025	.64	.150	3.81	.518	13.16	.860	21.84	1.233	31.32
.035	.89	.154	3.91	.519	13.18	.875	22.22	1.235	31.37
.051	1.30	.160	4.06	.530	13.46	.885	22.48	1.240	31.50
.052	1.32	.195	4.95	.535	13.59	.896	22.76	1.241	31.52
.054	1.37	.206	5.22	.558	14.17	.901	22.89	1.250	31.75
.061	1.55	.209	5.31	.562	14.27	.906	23.01	1.252	31.80
.063	1.60	.210	5.33	.58	14.7	.936	23.77	1.257	31.93
.071	1.80	.263	6.68	.594	15.09	.937	23.80	1.312	33.32
.072	1.83	.265	6.73	.627	15.93	.969	24.61	1.320	33.53
.076	1.93	.281	7.14	.636	16.15	.985	25.02	1.340	34.04
.078	1.98	.290	7.37	.689	17.50	.991	25.17	1.343	34.11
.084	2.13	.300	7.62	.696	17.68	1.002	25.45	1.358	34.49
.089	2.26	.340	8.64	.700	17.78	1.007	25.58	1.366	34.70
.092	2.34	.388	9.86	.705	17.91	1.031	26.19	1.375	34.92
.096	2.44	.398	10.11	.708	17.98	1.062	26.97	1.377	34.98
.100	2.54	.413	10.49	.719	18.26	1.108	28.14	1.382	35.10
.107	2.72	.418	10.62	.728	18.49	1.110	28.19	1.437	36.50
.114	2.90	.424	10.77	.758	19.25	1.116	28.35	1.483	37.67
.116	2.95	.433	11.00	.769	19.53	1.125	28.58	1.562	39.67
								1.703	43.26

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1°.
4. Coupling indicator line shall be color coded blue.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
6. Shell size 8 will not mate with MIL-C-26500 connectors.
7. See Table I for contact cavities requiring this dimension.

© FIGURE 3. Dimensions and configurations - Continued.

TABLE I. Insert arrangements requiring reduced diameters for lead-in chamfer on outer row of contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


(C) Dimensions and configuration: See figures 1 and 3 for classes A, G, K, R, and W. See figures 2 and 3 for classes N and S.

This connector mates with MIL-C-83723/87, 92, 96, and 98.

Insert arrangements: See MIL-STD-1554.

(C) "O" ring: See MIL-C-83723.

Part number example:

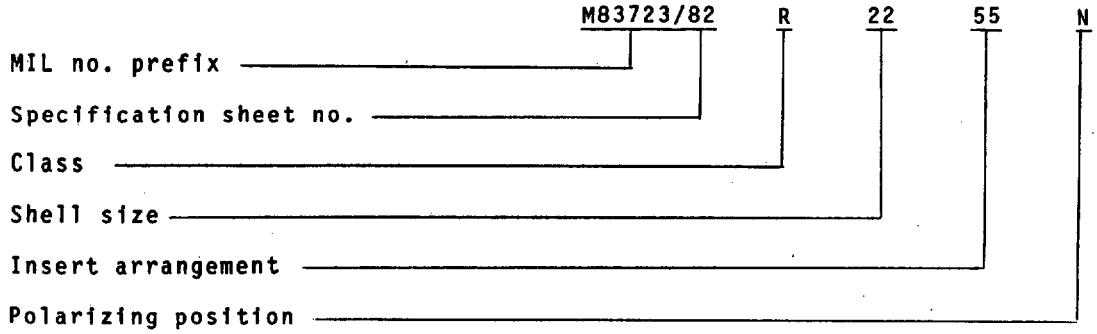

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

User activities:
Army -
Navy -
Air Force -

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3263-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.