
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SOLDER FLANGE MOUNT, THREADED COUPLING, SOLDER PIN CONTACT), (SERIES III, CLASSES H, N, AND Y)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification sheet and the latest issue of MIL-C-83723.

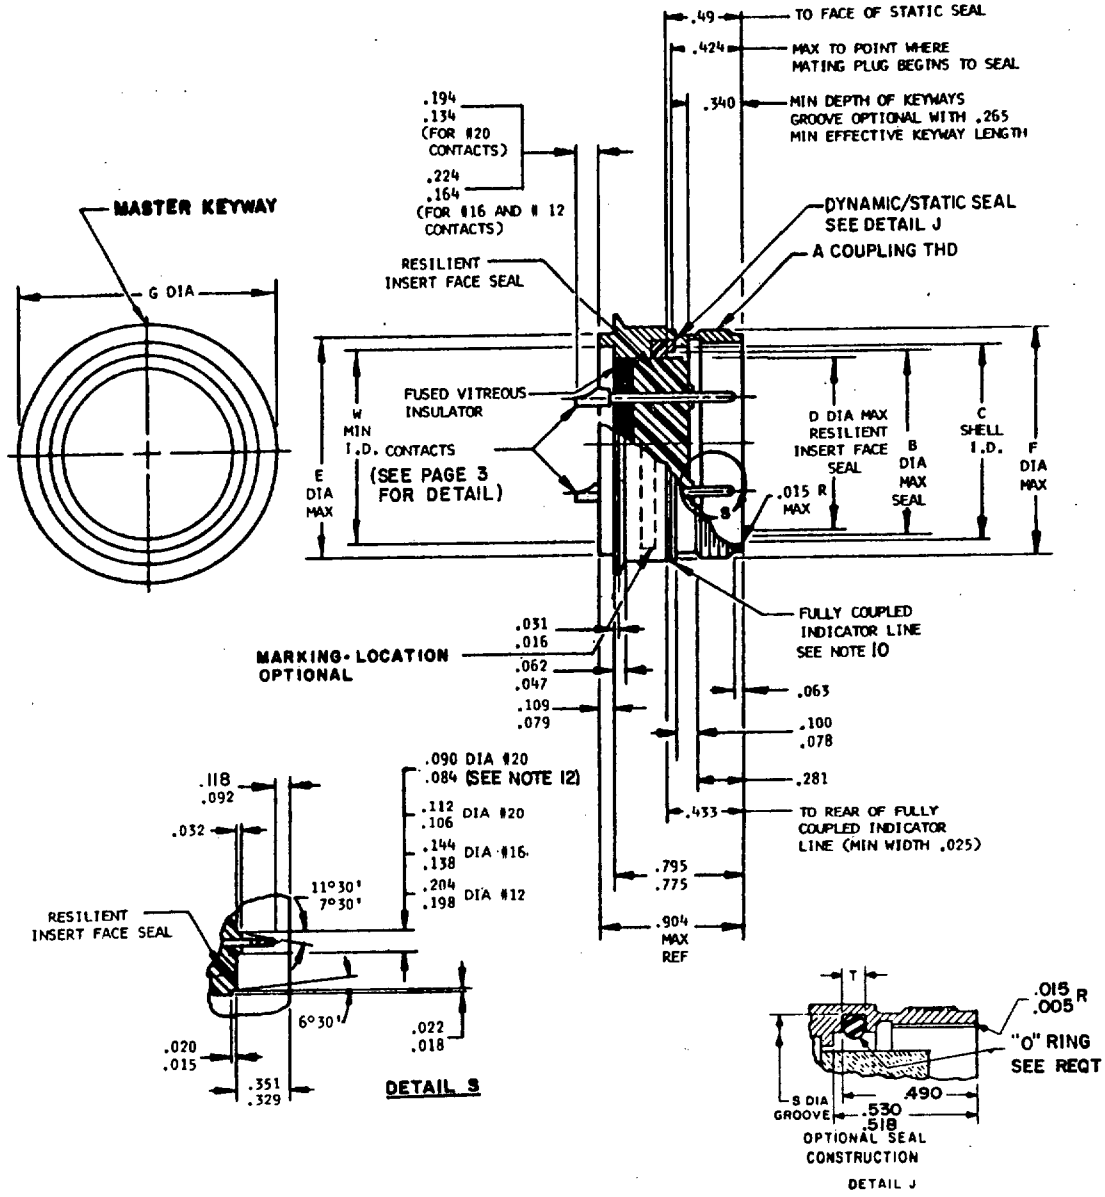

Ⓑ FIGURE 1. Dimensions and configurations.

Ⓑ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.


Connector dimensions.

Shell size	A thread	Major	Minor	B	C	D	E
8	.562-24 UNEF-2A	.5613 .5541	.5102 .5082	.398	.418 .413	.290	.500 .494
10	.688-24 UNEF-2A	.676 .671	.6352 .6280	.519	.535 .530	.388	.562 .556
12	.875-20 UNEF-2A	.862 .857	.8124 .8043	.689	.705 .700	.558	.750 .744
14	.938-20 UNEF-2A	.924 .919	.8748 .8666	.758	.774 .769	.627	.812 .806
16	1.062-18 UNEF-2A	1.048 1.043	.9929 .9842	.885	.901 .896	.772	.937 .931
18	1.188-18 UNEF-2A	1.173 1.168	1.1178 1.1089	.991	1.007 1.002	.860	1.062 1.056
22	1.438-18 UNEF-2A	1.423 1.418	1.3678 1.3588	1.241	1.257 1.252	1.110	1.312 1.306

Shell size	F	G	W	X	S +.005 -.000	T
8	.562	.723 .703	.400	.510	.490	.076 .071
10	.696	.850 .830	.411	.572	.636	.089 .084
12	.875	1.055 1.035	.581	.760	.806	
14	.936	1.100 1.080	.650	.822	.875	
16	1.062	1.220 1.200	.765	.947	1.022	
18	1.187	1.350 1.330	.864	1.072	1.108	
22	1.437	1.600 1.580	1.133	1.322	1.358	.089 .084


Ⓑ FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.




SOLDERPOT ORIENTATION

ENGAGING END OF CONTACTS

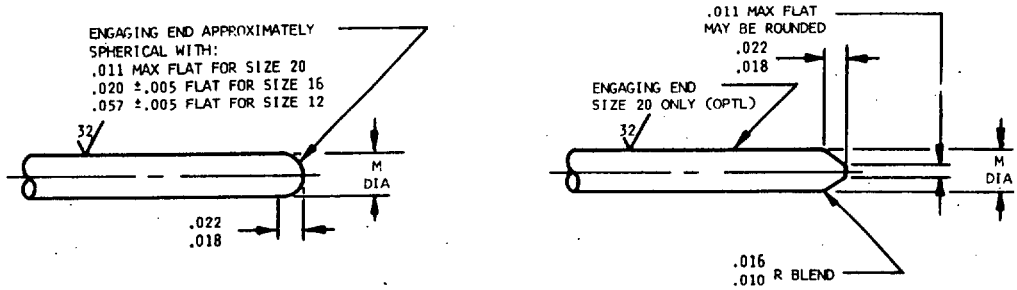

TERMINATION END
OF CONTACTS

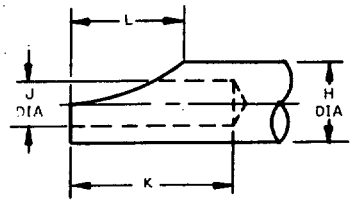


SOLDERPOT

Dimensions of contact engaging end.

Contact size	M	H	J	K	L
20	.041 .039	.088 .061	.048 .042	.188 .109	.110 .068
16	.0635 .0615	.116 .096	.075 .069	.251 .172	.141 .109
12	.095 .093	.150 .130	.122 .112	.251 .172	.141 .109

PANEL CUTOUT



Ⓑ FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.000050	.00127	.090	2.29	.400	10.16	.744	18.90	1.007	25.58
.003	.08	.092	2.34	.411	10.44	.750	19.05	1.035	26.29
.004	.10	.093	2.36	.413	10.49	.758	19.25	1.043	26.49
.005	.13	.095	2.41	.418	10.62	.765	19.43	1.048	26.62
.010	.25	.096	2.44	.424	10.77	.769	19.53	1.055	26.80
.011	.28	.100	2.54	.433	11.00	.772	19.61	1.056	26.82
.015	.38	.106	2.69	.49	12.4	.774	19.66	1.062	26.97
.016	.41	.109	2.77	.490	12.45	.775	19.69	1.080	27.43
.018	.46	.110	2.79	.494	12.55	.795	20.19	1.100	27.94
.020	.51	.112	2.84	.500	12.70	.8043	20.429	1.108	28.14
.022	.56	.116	2.95	.5082	12.908	.806	20.47	1.1089	28.166
.025	.64	.118	3.00	.5102	12.959	.812	20.62	1.110	28.19
.031	.79	.122	3.10	.518	13.16	.8124	20.635	1.1178	28.392
.032	.81	.130	3.30	.519	13.18	.830	21.08	1.133	28.78
.039	.99	.134	3.40	.530	13.46	.850	21.59	1.168	29.67
.041	1.04	.138	3.51	.535	13.59	.859	21.77	1.173	29.79
.042	1.07	.141	3.58	.5541	14.074	.860	21.84	1.187	30.15
.047	1.19	.144	3.66	.556	14.12	.862	21.89	1.200	30.48
.048	1.22	.150	3.81	.558	14.17	.864	21.95	1.220	30.99
.057	1.45	.160	4.17	.5613	14.257	.8666	22.012	1.241	31.52
.061	1.55	.172	4.37	.562	14.27	.8748	22.220	1.252	31.80
.0615	1.562	.188	4.78	.581	14.76	.875	22.23	1.257	31.93
.062	1.57	.194	4.93	.627	15.93	.885	22.48	1.306	33.17
.063	1.60	.198	5.03	.6280	15.951	.896	22.76	1.312	33.32
.0635	1.6	.204	5.18	.6352	16.134	.901	22.89	1.330	33.78
.068	1.73	.224	5.69	.636	16.15	.904	22.96	1.350	34.29
.069	1.75	.251	6.38	.650	16.51	.919	23.34	1.358	34.49
.071	1.80	.265	6.73	.671	17.07	.924	23.47	1.3588	34.513
.075	1.91	.281	7.14	.676	17.17	.931	23.65	1.3678	34.742
.076	1.93	.290	7.37	.689	17.50	.936	23.77	1.418	36.02
.078	1.98	.329	8.36	.696	17.68	.937	23.80	1.423	36.14
.079	2.01	.340	8.64	.700	17.78	.9842	24.999	1.437	36.50
.084	2.13	.351	8.92	.703	17.86	.991	25.17	1.580	40.13
.088	2.24	.388	9.86	.705	17.91	.9929	25.220	1.600	40.64
.089	2.26	.398	10.11	.723	18.36	1.002	25.45		

NOTES: (Notes 4 through 9 applicable to contacts only).

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1/2°.
4. Contact finish: Gold plate .000050 inch min. In accordance with MIL-G-45204. A suitable underplating shall be used. Silver shall not be used. Finish is applied after sealing.
5. Dimensions apply after plating.
6. 63 all over per ANSI B46. 1-62 unless otherwise specified.
7. Remove all burrs and sharp edges .003 to .005 R.
8. Diameters to be concentric within .004 TIR.
9. Diameters in the same cross-sectional plane to be concentric with each other within .003 TIR.
10. Coupling indicator line shall be color coded blue.
11. Shell size 8 will not mate with MIL-C-26500 connectors.
12. See Table I for contact cavities requiring this dimension.

(B) FIGURE 1. Dimensions and configurations - Continued.

TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: See figure 1.

This connector mates with MIL-C-83723/86, 91, 95, and 97.

Insert arrangements: See MIL-STD-1554.

(B) "O" ring: See MIL-C-83723.

Part number example:

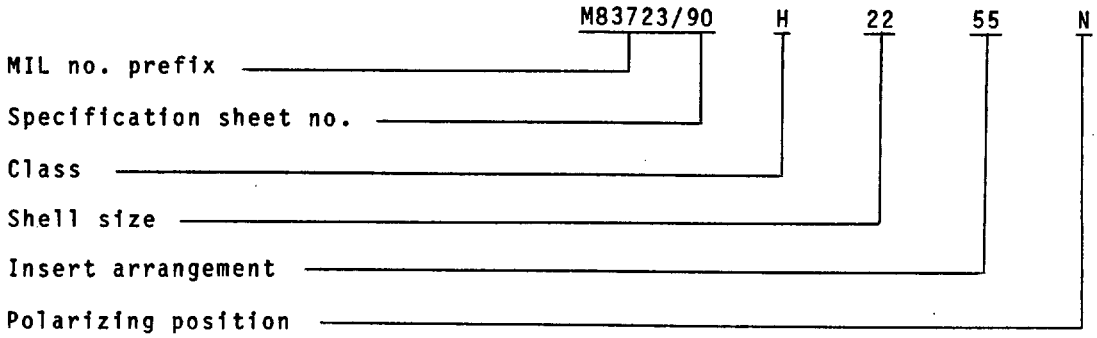

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

User activities:
Army -
Navy -
Air Force -

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3263-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.