

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SOLDER FLANGE MOUNT, BAYONET COUPLING, STRAIGHT PIN CONTACT), (SERIES III, CLASSES H AND Y)


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

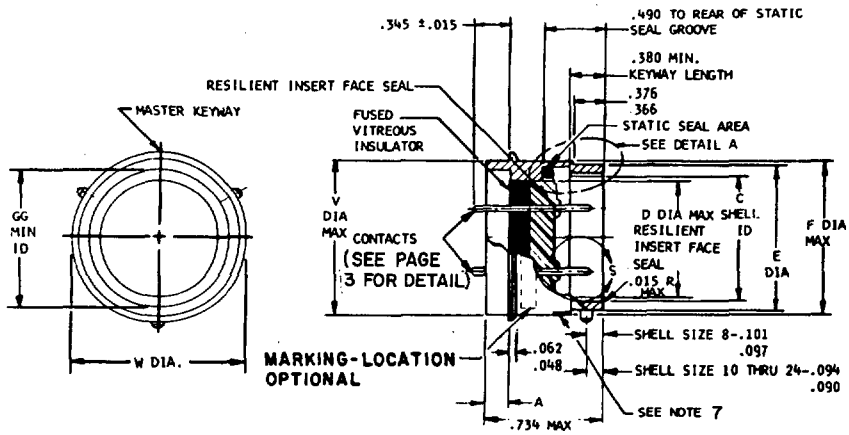



DETAIL A

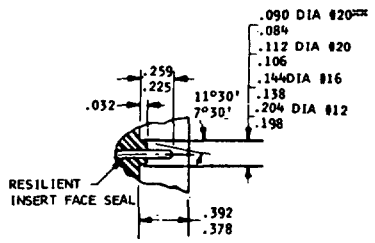

DETAIL S

*** SEE TABLE III FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.


TABLE I. Connector dimensions.

SHELL SIZE	A	C	D	E	F	G	V	W
8	.108 .078	.428 .433	.312	.536 .531	.561	.091 .097	.500	.760 .720
10	.108 .078	.530 .535	.388	.659 .654	.696	.091 .097	.562	.860 .820
12	.108 .078	.700 .705	.558	.829 .824	.875	.091 .097	.750	1.065 1.025
14	.108 .078	.769 .774	.627	.898 .893	.935	.091 .097	.812	1.110 1.070
16	.108 .078	.896 .901	.772	1.025 1.020	1.062	.122 .128	.937	1.230 1.190
18	.108 .078	1.002 1.007	.860	1.131 1.126	1.187	.122 .128	1.062	1.360 1.320
20	.108 .078	1.127 1.132	.985	1.256 1.251		.122 .128	1.187	1.450 1.410
22	.108 .078	1.252 1.257	1.110	1.381 1.376	1.437	.122 .128	1.312	1.610 1.570
24	.108 .078	1.377 1.382	1.235	1.506 1.501	1.562	.122 .128	1.437	1.730 1.690

SIZE	Y	Z	FF	GG
8	.474 .484	.620 .602	.505 .515	.406
10	.576 .586	.748 .730	.567 .577	.443
12	.746 .756	.918 .900	.755 .765	.668
14	.816 .826	.988 .970	.817 .827	.668
16	.942 .952	1.114 1.096	.942 .952	.763
18	1.048 1.058	1.220 1.202	1.067 1.077	.862
20	1.172 1.182	1.346 1.328	1.192 1.202	1.108
22	1.298 1.308	1.470 1.452	1.317 1.327	1.204
24	1.422 1.432	1.596 1.578	1.442 1.452	1.388

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

ENGAGING END OF CONTACTS

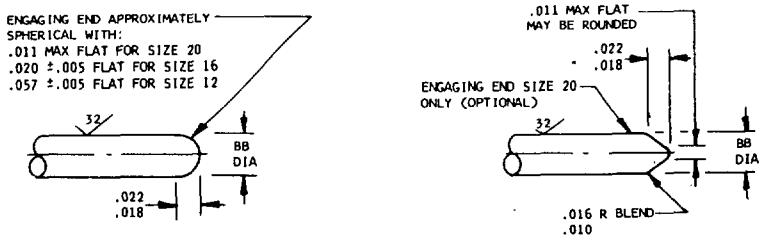

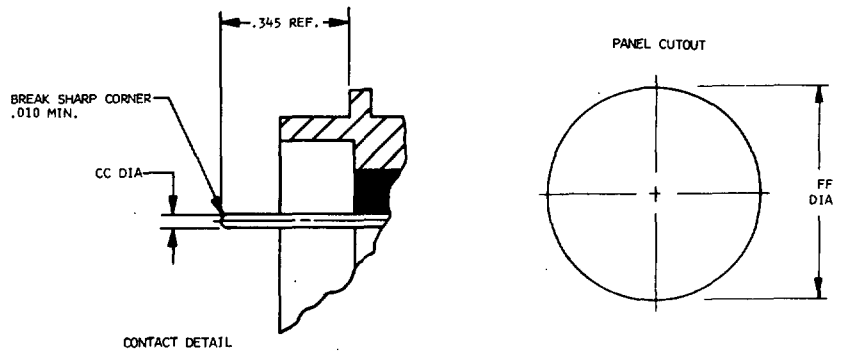


TABLE II. Dimensions of contact engaging end.

CONT SIZE	BB	CC
20	.041 .039	.042 .038
16	.0635 .0615	.064 .060
12	.095 .093	.096 .092

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.00005	.001	.345	8.76	.760	19.30	1.131	28.73
.003	.08	.366	9.30	.763	19.38	1.132	28.75
.004	.10	.376	9.55	.765	19.43	1.172	29.77
.005	.13	.378	9.60	.769	19.53	1.182	30.02
.010	.25	.380	9.65	.772	19.61	1.187	30.15
.011	.28	.388	9.86	.774	19.66	1.190	30.23
.015	.38	.392	9.96	.812	20.62	1.192	30.28
.016	.41	.406	10.31	.816	20.73	1.202	30.53
.018	.46	.428	10.87	.817	20.75	1.204	30.58
.020	.51	.433	11.00	.820	20.83	1.220	30.99
.022	.56	.443	11.25	.824	20.93	1.230	31.24
.032	.81	.474	12.04	.826	20.98	1.235	31.37
.038	.97	.484	12.29	.827	21.01	1.251	31.78
.039	.99	.490	12.45	.829	21.06	1.252	31.80
.041	1.04	.500	12.70	.860	21.84	1.256	31.90
.042	1.07	.505	12.83	.862	21.89	1.257	31.93
.048	1.22	.515	13.08	.875	22.23	1.298	32.97
.051	1.30	.530	13.46	.893	22.68	1.308	33.22
.060	1.52	.531	13.49	.896	22.76	1.312	33.32
.0615	1.56	.535	13.59	.898	22.81	1.317	33.45
.062	1.57	.536	13.61	.900	22.86	1.320	33.53
.0635	1.61	.540	13.71	.901	22.89	1.327	33.71
.064	1.63	.558	14.17	.918	23.32	1.328	33.73
.078	1.98	.560	14.22	.935	23.75	1.346	34.19
.084	2.13	.561	14.25	.937	23.80	1.360	34.54
.089	2.26	.562	14.27	.942	23.93	1.376	34.95
.090	2.29	.567	14.40	.952	24.18	1.377	34.98
.091	2.31	.576	14.63	.970	24.64	1.381	35.08
.092	2.34	.577	14.66	.985	25.02	1.382	35.10
.093	2.36	.586	14.88	.988	25.10	1.388	35.26
.094	2.39	.602	15.29	1.002	25.45	1.410	35.81
.095	2.41	.620	15.75	1.007	25.58	1.422	36.12
.096	2.44	.627	15.93	1.020	25.91	1.432	36.37
.097	2.46	.654	16.61	1.025	26.04	1.437	36.50
.101	2.57	.659	16.74	1.048	26.62	1.442	36.63
.106	2.69	.668	16.97	1.056	26.82	1.450	36.83
.108	2.74	.696	17.68	1.062	26.97	1.452	36.88
.112	2.84	.700	17.78	1.065	27.05	1.470	37.34
.122	3.10	.705	17.91	1.067	27.10	1.501	38.13
.128	3.25	.720	18.29	1.070	27.18	1.506	38.25
.138	3.51	.730	18.54	1.077	27.36	1.562	39.67
.140	3.56	.734	18.64	1.096	27.84	1.570	39.88
.144	3.66	.746	18.95	1.108	28.14	1.578	40.08
.198	5.03	.748	19.00	1.110	28.19	1.596	40.53
.204	5.18	.750	19.05	1.114	28.30	1.610	40.89
.225	5.72	.755	19.18	1.126	28.60	1.690	42.93
.259	6.58	.756	19.20	1.127	28.63	1.730	43.94
.312	7.92						

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.

TABLE III. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3
10	-6	1, 2, 3, 4, 5, 6

NOTES: (Notes 1 through 6 applicable to contacts only).

1. Contact finish: Gold plate .000050 inch min. In accordance with MIL-G-45204. A suitable underplating shall be used. Silver shall not be used. Finish is applied after sealing.
2. Dimensions are in inches. Dimensions apply after plating.
3. 63/ all over per ANSI B46.1-62 unless otherwise specified.
4. Remove all burrs and sharp edges .003 to .005 R.
5. Diameters to be concentric within .004 TIR.
6. Diameters in the same cross-sectional plane to be concentric with each other within .003 TIR.
7. Polarizing stripe shall be color coded blue.
8. Three (3) pins to be located within .004 either side of (TP) relative to master polarizing keyway.
9. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1/2°.
10. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Dimensions and configuration: See figure.

This connector mates with MIL-C-83723/75 and /77.

For insert arrangements see MIL-STD-1554.

Part number example:

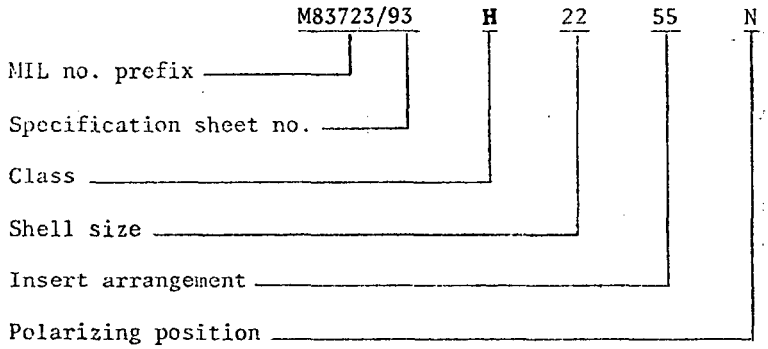

Custodians:
Army - EL
Navy - AS
Air Force - 85

Review activities:
Army - MI, MU
Navy - EC
Air Force - 11, 15, 17, 80
DSA - ES

User activities:
Army -
Navy -
Air Force -

Preparing activity:
Air Force - 85

(Project 5935-1948-23)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:24Z
Check the source to verify that this is the current version before use.