

MILITARY SPECIFICATION SHEET


TRANSOLVER
TYPE 26 10R90Y440A

The complete requirements for procuring the transolver described herein shall consist of this document and the latest issue of MIL-T-83727.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

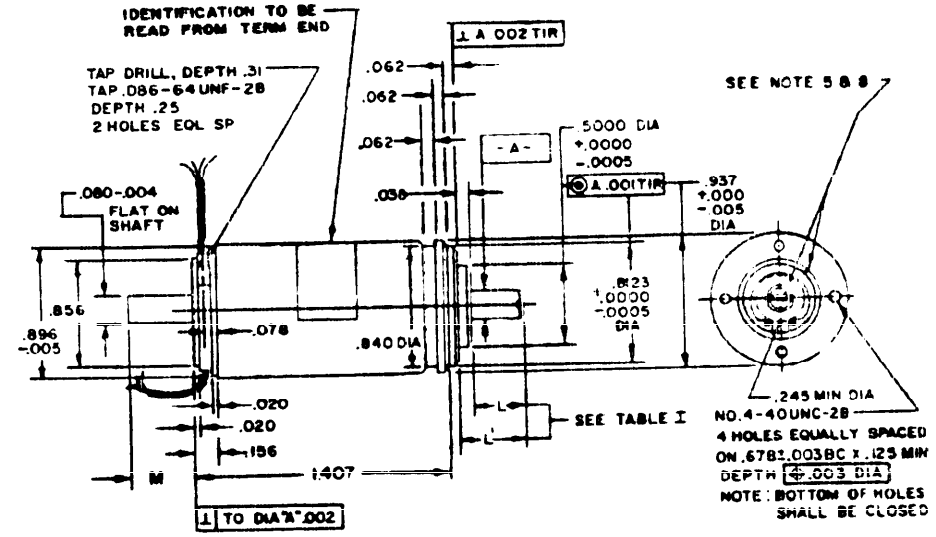

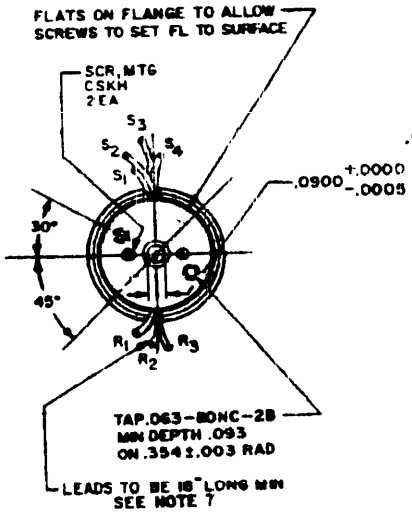

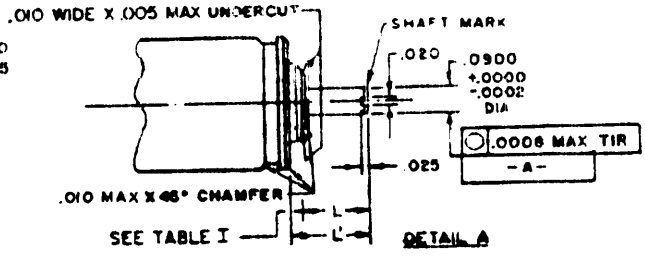

FSC 5990

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:31Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.005 on decimals, ±2° on angles.
3. Perpendicularity and concentricity shall be measured with the unit in a vertical position supported by the shaft, then the housing rotated.
4. Minor variations on unit configuration are permitted for un-dimensioned design detail.
5. Mark on housing is to match shaft mark within 10° when rotor is set at approx. transolver zero and will bear no relation to the center lines shown on the drawing.
6. Pending issuance of a qualified products list (QPL) a sample of the transolver to be furnished under this specification shall be subjected to the first article tests as specified in MIL-T-83727.
7. Leads shall be type E-28.
8. The front retainer shall be threaded or a snap ring.
9. For double shaft units, the shaft end opposite the lead or terminal end shall be used in determining the direction of rotation.
10. For double shaft units, this requirement is applicable to both shafts.

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:31Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:	VALUE	UNIT	TOLERANCE
Primary element	Rotor	-	-
Excitation frequency	400	Hz	±1%
Primary voltage	26	Volts	±1%
Primary current	31	Milliamperes	Max.
Primary power	.27	Watts	Nominal
D. C. resistance:			
Rotor	240	Ohms	±15%
Stator	44	Ohms	±15%
Impedance:			
Z_{ro}	310+j826	Ohms	R±15%+jx±10%
Z_{so}	67+j240	Ohms	R±15%+jx±10%
Z_{ss}	91-j61	Ohms	Referenced
Transformation ratio:			
Output/input	.454	-	±2%
Phase shift	14	Degrees	±1.5°
Electrical error	4	Minutes	Max.
Interaxis error	7	Minutes	Max.
Null voltage:			
Fundamental	40	MV rms	Max.
Total	60	MV rms	Max.
Friction torque: 1/			
At 23° C	.04 (3)	Oz-in. (Gm-Cm)	Max.
At -55° C and +125° C	.1 (9)	Oz-in. (Gm-Cm)	Max.
Radial play 1/	.0004 (Using 4 oz. load)	Inches	Max.
End play 1/	.0001-.0005 (Using 8 oz. load)	Inches	Min.-Max.
Temperature rise	5	°C	Max.

Part number: M83727 11 and a dash number from table I.

TABLE I. Dash number and characteristics.

Dash no.	Shaft diameter	Shaft style	Termination	Shafts length		
				L ref	L' dim to first mounting surface (±.010)	M(±.010)
-001	.0900	Plain	Wire leads	.337	.375	.188

1/ See note 10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:31Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - AS
Air Force - 80

Review activities:
Navy - SH, EC
Air Force - 11, 17
DSA - ES

User activities:
Navy - CG, MC
Air Force -

Preparing activity:
Air Force - 80

Agent:
DSA - ES

(Project 5990-0267)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:31Z
Check the source to verify that this is the current version before use.