MILITARY SPECIFICATION SHEET

VALVE, CYLINDER, GAS:

NITROGEN, RECOIL MECHANISMS, OUTLET 000

The complete requirements for procuring the valve described herein shall consist of this document and the issue in effect of specification MIL-V-2.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

TYPE DESIGNATION	CYLINDER SERVICE PRESSURE PSI	TYPE SAFETY DEVICE
V33-000-2	1800 through 2400	5
V33-000-6	2400 through 2500	1
V33-000-7	3000	1
V33-000-8	3500	1

STYLE	CLASS	COMPOSITION	INLET SIZE	OUTLET APPLICATION	HANDWHEEL	SAFETY DEVICE
III	36	A	6	000	Required	1

SPECIAL REQUIREMENTS:

1. Outlet 000 shall conform to figure 1 of this specification sheet.
2. Mark the valve body: NITROGEN O.F.
3. Safety device #5 shall be utilized for cylinder with 1800-2400 psi service pressures.

Source: https://assist.dla.mil -- Downloaded: 202640-15T15:40Z
Check the source to verify that this is the current version before use.

OPTIONAL REQUIREMENTS:

1. Outlet cap or plug (required) (not required).
2. Cylinder service pressure (_____psi).

INTENDED USE:

The valves covered by this specification sheet are intended for use with oil free nitrogen cylinders used exclusively for servicing artillery recoil mechanisms.

NOTES:

1. Type designation will be the style valve from the chart above.
2. Special requirements will be mandatory for all valve procurements.
3. Optional requirements will be specified for each valve procurement.
4. The 580 outlet is the standard connection for nitrogen service and will be used whenever possible.

Custodians:

Army - ME
Navy - SH
Air Force - 68

Preparing activity:

Army - ME

Project No. 8120-0365

Review activities:


Army - MI, MU
Navy - AS

User activities:

Army - AV
Navy - YD, MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:40Z
Check the source to verify that this is the current version before use.

W = 25/64
C = 1/8 INCH MIN., 1/4 INCH MAX.
K = 53 DEGREES, 8 MINUTES ± 2 MINUTES.
D = .5512 INCH.
B = 0.1575 INCH.
COUNTERSINK DIAMETER 90 DEGREES, 5/16 INCH.

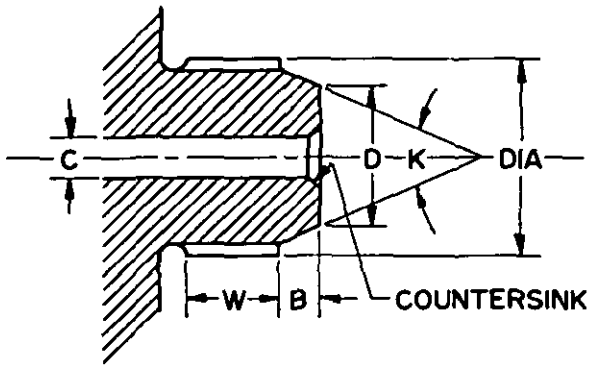

THREAD SPECIFICATIONS

Nominal Outlet Size - 0.7800-12-7/10 TPI-PH

	OUTLET	CAP
MAJOR DIAMETER	0.7800-0.7770	0.7900-0.7870
PITCH DIAMETER	0.7406-0.7376	0.7507-0.7477
MINOR DIAMETER	0.7012-0.6982	0.7113-0.7083

The crests and the roots of the internal and the external threads shall be semicircular in shape having a maximum radius of .0197 inch. The pitch of the threads shall be 0.0787 inch.

FIGURE 1. OUTLET AND COUNTERBORE.

Source: https://assist.dla.mil -- Downloaded: 202640-15T15:40Z
Check the source to verify that this is the current version before use.