MILITARY SPECIFICATION

BAG, AMMUNITION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 This specification covers an ammunition bag, in one type and size, fabricated from nylon duck, tape and webbing.

* 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-285	-	Thread, Polyester
UU-P-268	-	Paper, Kraft, Untreated, Wrapping
DDD-L-20	-	Label; for Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-R-3390	-	Rings, Dee
MIL-W-4088	-	Webbing, Textile, Woven Nylon
MIL-T-5038	-	Tape, Textile and Webbing, Textile, Reinforcing, Nylon
MIL-C-7219	-	Cloth, Duck, Nylon
MIL-G-16491	-	Grommet, Metallic
MIL-W-27265	-	Webbing, Textile, Woven Nylon Impregnated
MIL-C-43375	-	Cloth, Duck, Nylon, 12.5 Ounce

Source: https://assist.dla.mil -- Downloaded: 20260-17T13:22Z
Check the source to verify that this is the current version before use.

MIL-W-43668 - Webbing, Textile, Bulked Nylon
MIL-S-43770/1 - Snap Hooks, Wire Body, Fixed Loop Eye, Flat Spring Closure, With Retainer

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads on 40" X 48" Pallets

DRAWINGS

ARMY NATICK LABORATORIES

5-3-41 - Bag, Ammunition; Assembly
5-3-42 - Bag, Ammunition; Sections
5-3-43 - Bag, Ammunition; Details "A"
5-3-44 - Bag, Ammunition; Details "B"
5-3-45 - Bag, Ammunition; Details "C"

(Miniature reproductions of referenced drawings are attached for information only.)

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

* 3.1 Guide sample.- Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from the specification may appear in the sample, in which case the specification shall govern.

* 3.2 First article.- When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.2 and 6.4).

3.3 Materials.-

* 3.3.1 Cloth, duck, nylon, 12.5 ounce.- The nylon duck for the front, gusset, and flap and back, including reinforcement, shall conform to class 2, color Olive Green 106 of MIL-C-43375.

* 3.3.2 Cloth, duck, nylon, 7.25 ounce.- The nylon duck for the pocket body and pocket bottom shall conform to type III, class 3, color Olive Green 106 of MIL-C-7219.

* 3.3.3 Webbing, nylon.-

3.3.3.1 Type VIIIb, 2 inch wide.- The 2 inch wide webbing for the carrying strap shall conform to type VIIIb, color Olive Drab 7 of MIL-W-4088. The webbing shall be resin impregnated in accordance with class R of MIL-W-27265.

* 3.3.3.2 Type III, 1 inch wide.- The 1 inch wide webbing for the chapes and billet shall conform to type III, color Olive Drab 7 of MIL-W-43668.

* 3.3.4 Tape, nylon.- The nylon tape for binding shall conform to type III, 1 inch wide of MIL-T-5038. The tape shall be dyed Olive Drab 7.

* 3.3.5 Thread, polyester.- The thread for all stitching shall be polyester conforming to type I, class 1, sub-class B, of V-T-285. Thread size shall be as specified in 3.4.1.

* 3.3.5.1 Color.- The thread shall be dyed Olive Drab S-1, C.A. 66022, and shall show fastness to weathering equal to or better than the standard

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

sample (see 6.3). When no standard sample is available, the thread shall show "good" fastness to weathering.

* 3.3.6 Buckle, non-slip, 1 inch.- The buckle shall be composed of a top and bottom section made of corrosion resistant steel, type 301-302, and a spring made of corrosion resistant steel, type 301-302, temper 3/4 hard, and shall conform to Waterbury Buckle Company No. 240, Waterbury, Conn., or equal. Prior to the use of the "or equal" item, the supplier shall submit the item to the contracting officer with supporting data for approval. The buckle shall have a dull, black, oxide finish (see 4.3.1.1).

* 3.3.7 Grommet and washer.- The grommet and spur washer shall conform to type III, class 3, size No. 0 of MIL-G-16491.

* 3.3.8 Rings, dee.- The dee rings shall conform to class 1 or 2, configuration D of MIL-R-3390.

3.3.9 Snaphook.- The snaphook shall conform to dash No. CWBC3 or SWZE3 of MIL-S-43770/1.

3.4 Construction.- The construction shall conform in all respects to the drawings listed in section 2, and as specified herein.

* 3.4.1 Stitching, machine.- All stitching shall conform to FED-STD-751 as follows:

For all stitching except overedge stitching:	type 301, 8 to 10 stitches per inch with size FF thread. Unless otherwise specified stitching margins shall be 1/8 ± 1/16 inch.
For overedge stitching:	type 503 or 504, 7 to 9 stitches per inch with size E thread. Width of stitching shall be 3/16 to 1/4 inch.

* 3.4.1.1 Type 301 stitching.- Unless otherwise specified, ends of all 301 stitching shall be backstitched or overstitched 3/4 inch minimum except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

* 3.4.1.1.1 Repairs of type 301 stitching.- Thread breaks and two or more consecutive skipped stitches or run-offs on type 301 stitching shall be overstitched not less than 3/4 inch in each direction beyond the defective stitching area. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner.

* 3.4.1.2 Types 503 and 504 stitching.- Thread breaks and two or more consecutive skipped stitches or runoffs on types 503 and 504 stitching shall be overstitched not less than 3/4 inch in each direction beyond the defective stitching area. Thread tension shall be maintained so that there will be no loose stitching.

* 3.4.1.3 Optional type 517 or 518 stitching.- As an option, the overedge stitching and type 301 stitching required for joining components may be performed in a single operation using stitch type 517 or 518. Specific stitching requirements shall be as specified in 3.4.1.1 and 3.4.1.2, as applicable.

* 3.4.1.4 Automatic stitching.- Automatic machines may be used to perform any of the required stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met; and at least three or more tying, overlapping or backstitches are used to secure the ends of the stitching.

* 3.4.1.5 Lubrication of thread.- There shall be no lubrication of the thread by any means, prior to or during sewing (see 4.3.1.1).

* 3.4.1.6 Thread ends.- All thread ends shall be trimmed to a length of not more than 1/4 inch.

* 3.4.2 Fusing of nylon webbing ends.- All ends of nylon webbing shall be fused. The apparatus used to fuse the webbing ends shall be capable of providing sufficient heat to provide a smooth edge with the ends of the webbing yarns all fused together.

* 3.4.3 Location marks.- Location marks shall not be drilled except for locating the grommet.

* 3.4.4 Setting of grommets.- The hole punched to receive the grommet shall be smaller than the outside diameter of the grommet barrel so that the barrel must be forced through the hole. The grommet shall be tightly clinched without cutting the surrounding materials. The washers shall be on the inside of the gusset and pocket bottom.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

3.4.5 Repairs.- Except as otherwise specified herein, repairs are not allowed to be made to the bag.

3.5 Marking.- The identification marking shall be applied in the location shown on Drawing 5-3-44 and shall conform to type IV, class 5 of DDD-L-20. The letters "US" shall be applied in the size characters and in the location shown on Drawing 5-3-45 and shall conform to type IV, class 9 of DDD-L-20. Fastness of the class 9 marking shall be as specified for class 5 marking.

3.6 Workmanship.- The finished ammunition bag shall conform to the quality and grade of product established by this specification. Occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance.- Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection.- When required (see 6.2), the preproduction sample submitted in accordance with 3.2, shall be inspected as specified in 4.3.3 for compliance with design, construction, workmanship and dimensional requirements.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except when otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.1.1 Certification.- The supplier shall furnish certificates of compliance stating that the steel used for the buckle and the finish requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

for the buckle conform to the requirements specified in 3.3.6 and that the thread conforms to the requirement specified in 3.4.1.5.

* 4.3.2 In-process inspection.- The cut parts shall be inspected during the cutting process to determine if parts are cut properly with respect to size. In addition, inspection shall be made during the manufacturing process to insure that, when holes are pre-punched for the grommets, the holes are smaller than the grommet barrel. Whenever non-conformance is noted, corrections shall be made to the parts affected and lot in process. Parts which cannot be corrected shall be removed from production.

4.3.3 Examination of the end item.- The classification of defects found during examination shall be in accordance with the lists shown in 4.3.3.1 and 4.3.3.2. The sample unit for these examinations shall be one finished bag. The inspection level and acceptable quality levels for these examinations shall be in accordance with 4.3.3.3.

* 4.3.3.1 Visual examination.-

Examine	Defect	Classification Major	Minor
Fabrics	Any hole, cut or tear, smash, broken or missing yarns, or open place.	X	
	Needle chews	X	
Webbing or tape	Any hole, cut or tear.	X	
	Not firmly and tightly woven, edges frayed or scalloped.	X	
	Abrasion mark, slub, smash, broken end or pick.	X	
	Webbing ends not fused or not fused properly, i.e., yarn ends not fused together or not smooth.		X
	Needle chews:		
	- up to 1/8 inch in length		X
	- more than 1/8 inch in length	X	
Hardware, general	Broken or malformed, failing to serve intended purpose; corroded area, burr or sharp edge.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Hardware, general (cont'd)	Finish omitted or not as specified - on steel components	X	
	- on brass components		X
Snaphook	Spring does not function properly failing to return to closed position when pressure is released	X	
Buckle	Not assembled as specified, i.e., reversed; failing to affect a secure fastening of billet	X	
	Not type specified.	X	
Grommets	Clinched loosely to a degree that grommet may be detached from material; clinched excessively tight, cutting surrounding material.	X	
	Size or type not as specified.	X	
	Improperly set, i.e., teeth exposed inside of barrel or set with washer on outside.		X
Open seams	1/2 inch or less		X
	More than 1/2 inch	X	
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken, or when two or more consecutive skipped stitches or run-offs occur.		
Raw edges	More than 1/2 inch when securely caught in stitching.		X
	NOTE: Raw edges not securely caught in stitching shall be classified as open seams.		
Seam and stitch type	Wrong seam or stitch type.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Stitch tension	Loose, resulting in a loose bobbin or top thread.		X
	Tight, resulting in excessive puckering of material.		X
Stitches per inch	One to 2 stitches less than minimum specified.		X
	Three or more stitches less than minimum specified.	X	
	One or more stitches in excess of maximum specified		X
	NOTES: (1) Variation in the number of stitches per inch caused by the operator speeding up the machine and pulling the fabric in order to sew over heavy seams, or in turning corners shall be classified as follows: (a) within the minor defect classification - no defect (b) within the major defect classification - minor defect		
	(2) Defects to be scored only when condition exists on major portion of seam. Applicable to individual seams.		
Thread breaks, skipped stitches, or runoffs	Thread breaks, or two or more consecutive skipped stitches or runoffs overstitched less than 3/4 inch in each direction beyond the defective stitching area.		
	NOTE: Thread breaks, or two or more consecutive skipped stitches or runoffs not overstitched shall be classified as open seams.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Stitching ends (on stitch type 301)	Not secured as specified (except where ends are held down by other stitching or turned under in a hem).		X
Components and assembly	Any component part or required operation omitted or not as specified (unless otherwise classified herein.)	X	
	One or more rows of stitching omitted (except on boxstitching).	X	
	Boxstitching incomplete:		
	- One row of stitching omitted.		X
	- Two or more rows of stitching omitted.	X	
	Mends, darns or patches	X	
Binding tape	Loosely applied but not exposing raw edge of material.		X
	Loosely applied exposing raw edge of material.	X	
Reinforcement	Misplaced, failing to serve intended purpose.		X
Webbing components (chapes, billet and carrying strap).	Spliced, made from more than one piece of webbing.		X
	Ends not folded under as specified.		X
	Any webbing component reversed failing to serve intended purpose.	X	
Marking: "US" and identification	Omitted, illegible, incorrect, misplaced or size and color of marking not as specified.		X
Cleanness	Grease, ink or oil stains clearly noticeable; thread ends not trimmed as specified throughout.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

* 4.3.3.2 Dimensional examination.-

Examine	Defect	Classification Major	Classification Minor
Dimensions, overall	Smaller than nominal dimensions less applicable minus tolerance indicated on drawing but not smaller than nominal dimension less twice the applicable minus tolerance.		X
	Smaller than nominal dimensions less twice the applicable minus tolerance.	X	
	Larger than nominal dimensions and applicable plus tolerance indicated on drawing.		X
All dimensions other than overall including stitch margin and gage.	Any not within specified tolerance.		X

* 4.3.3.3 Inspection levels and acceptable quality levels (AQLs).- The inspection levels and AQLs expressed in defects per hundred units shall be as follows:

Examination	Inspection level	AQL
For defects applicable to 4.3.3.1, visual examination	II	2.5 Major 15.0 Total (major and minor defects combined).
For defects applicable to 4.3.3.2, dimensional examination	S-3	4.0 Major 15.0 Total (major and minor defects combined).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

* 4.3.4 Examination of preparation for delivery requirements.-

* 4.3.4.1 Examination for packaging, packing and marking.- An examination shall be made to determine that the packaging, packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, improper taping, loose strapping or inadequate stapling. Bulged or distorted container.
Content	Number of bags per shipping container is more or less than required. Number of bags per bundle is more or less than required. 1/

1/ For this defect, two bundles from each shipping container in the sample shall be examined.

* 4.3.4.2 Examination for palletization.- An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width or height exceeds specified maximum requirement.
Palletization	Not as specified. Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A.- Each bag shall have the snaphook and dee ring on the attached carrying strap engaged and placed in the bag. The two sides of the flap shall be folded in. The flap shall then be folded over the front. Five folded bags shall be neatly stacked in a bundle with every other bag reversed top to bottom. Each bundle shall be securely cross-tied with cotton tape or twine. Each tied bundle shall measure approximately 12-1/2 inches in length, 8 inches in width and 5 inches in depth.

5.1.2 Level C.- Bags shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A.- Sixty bags, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each container shall be fitted with a taped box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A packages shall be packed flat, two in length, two in width and three in depth, within a shipping container. Inside dimensions of each shipping container shall approximate 25 inches in length, 16 inches in width and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

covered top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed, waterproofed, and reinforced in accordance with the appendix of the container specification.

* 5.2.2 Level B.- Sixty bags, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a taped box liner conforming to type CF, variety DW, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat, two in length, two in width and three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 25 inches in length, 16 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the box specification.

* 5.2.3 Level C.- Bags, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Palletization.- Unless otherwise specified (see 6.2), bags, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

* 5.4 Marking.- In addition to any special marking required by the contract or order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

6. NOTES

* 6.1 Intended use.- The bag is a general purpose ammunition bag designed to accommodate various types of grenades and ammunition. One interior pocket

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

is provided for use when it is desired to separate a particular type of grenade or ammunition from the other contents of the bag. The bag may be hand carried by means of a short carrying strap permanently attached to the bag; or shoulder carried by means of a general purpose carrying sling conforming to MIL-S-1698, which can be attached to dee rings attached to the bag.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When a first article sample is required (see 3.2, 4.2 and 6.4).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(e) When palletization is not required (see 5.3).

6.3 For access to samples, address the procuring office issuing the invitation for bids.

* 6.4 First article.- When a first article sample is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample consisting of one completed ammunition bag. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for inspection and approval of the first article.

* 6.5 Marginal code identification.- The outside margins of this document are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 82

Review activity:


Army - MD

Preparing activity:


Army - GL

Project No. 8465-0414


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

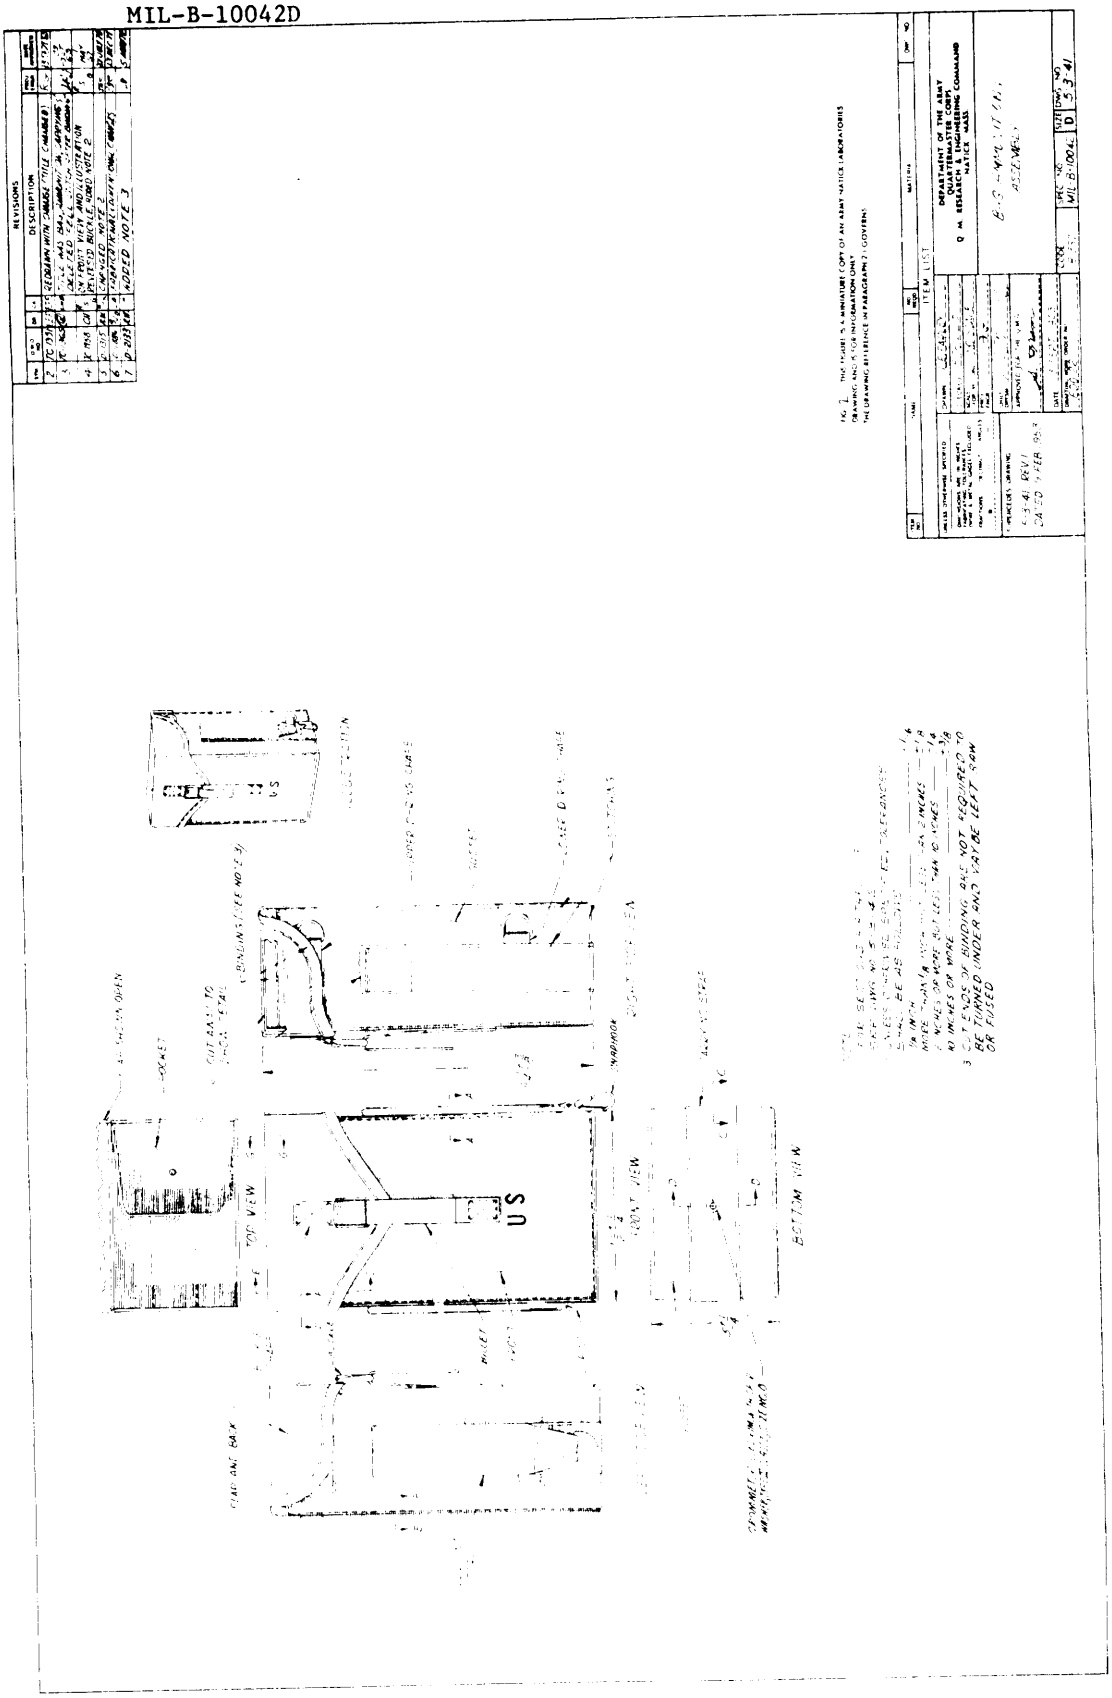


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

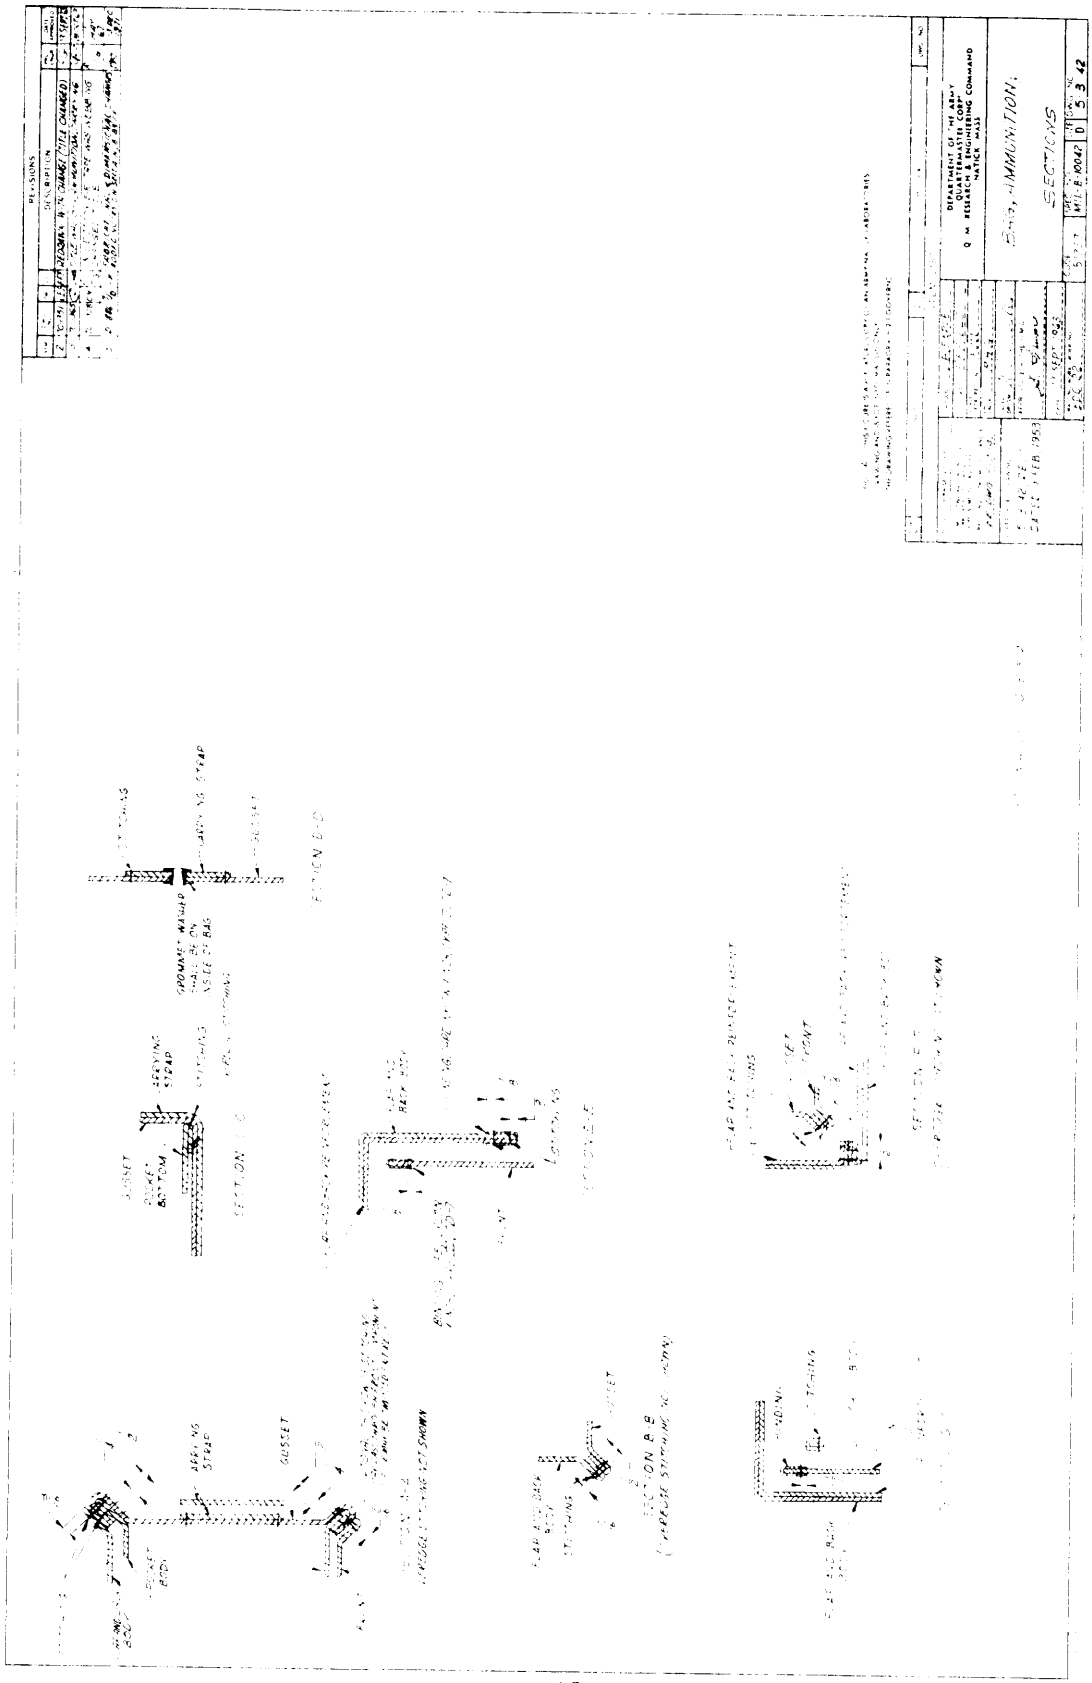


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

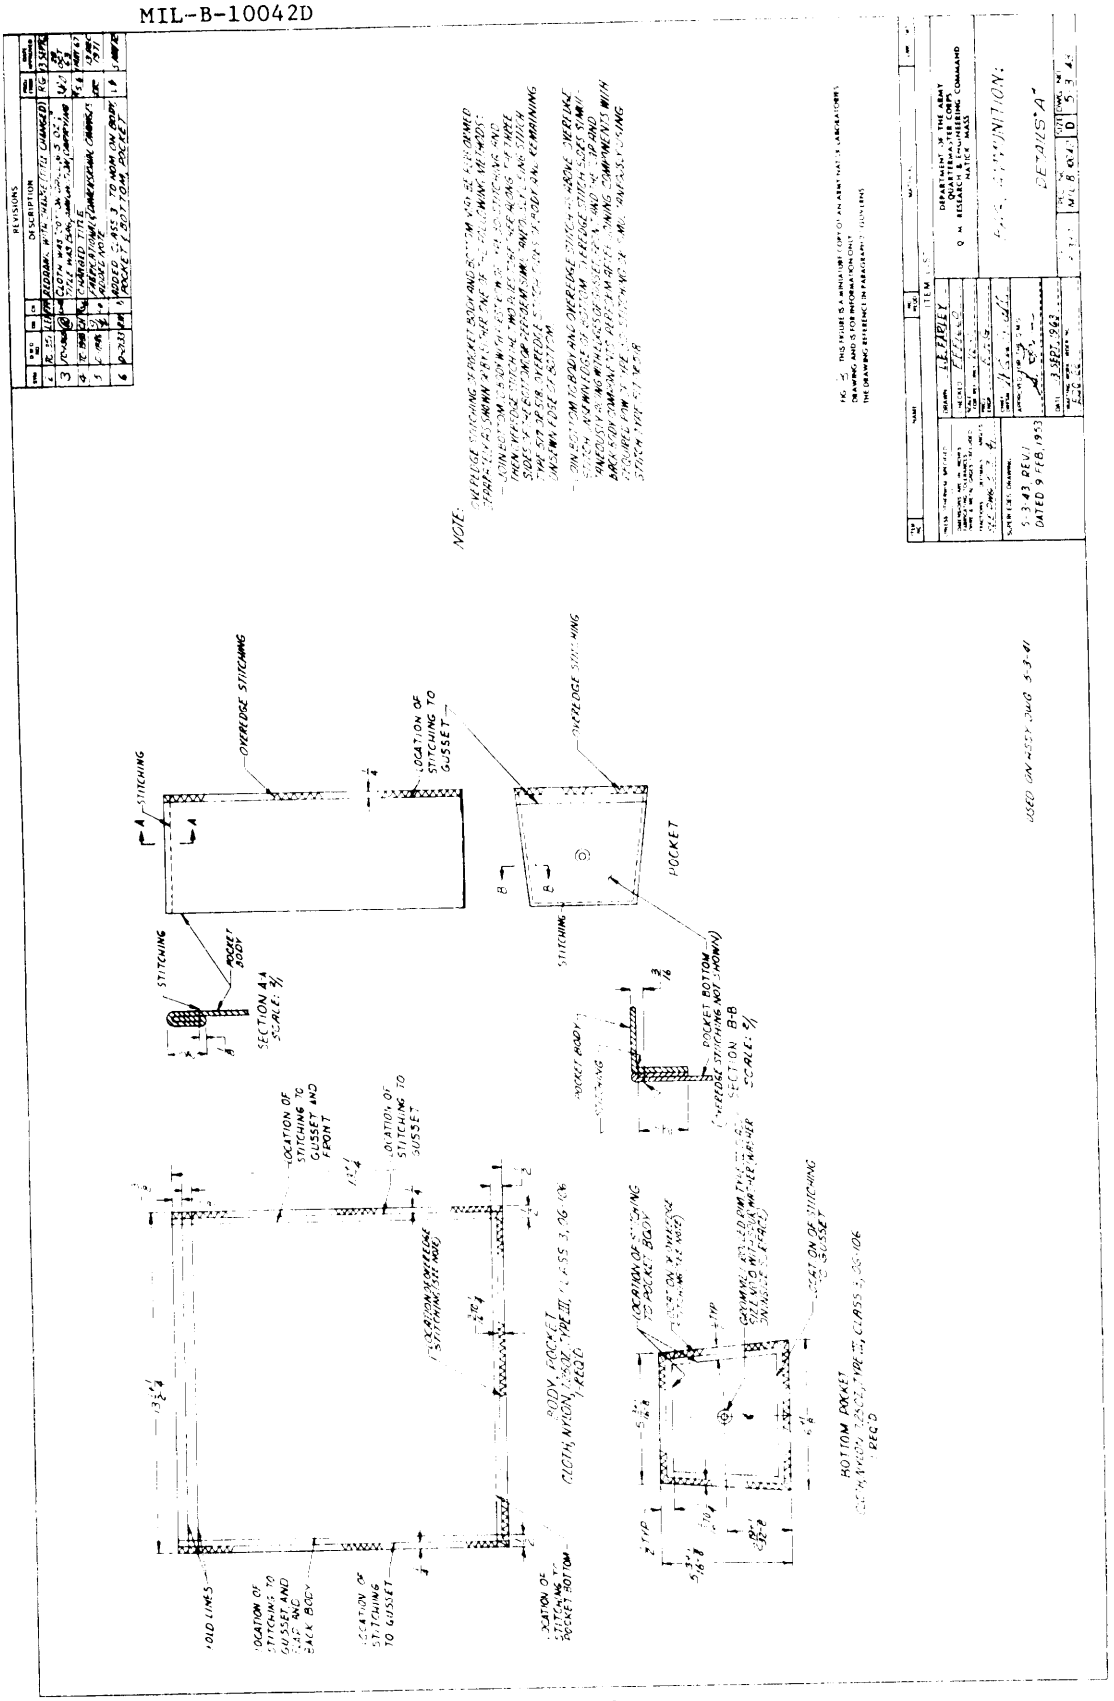

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

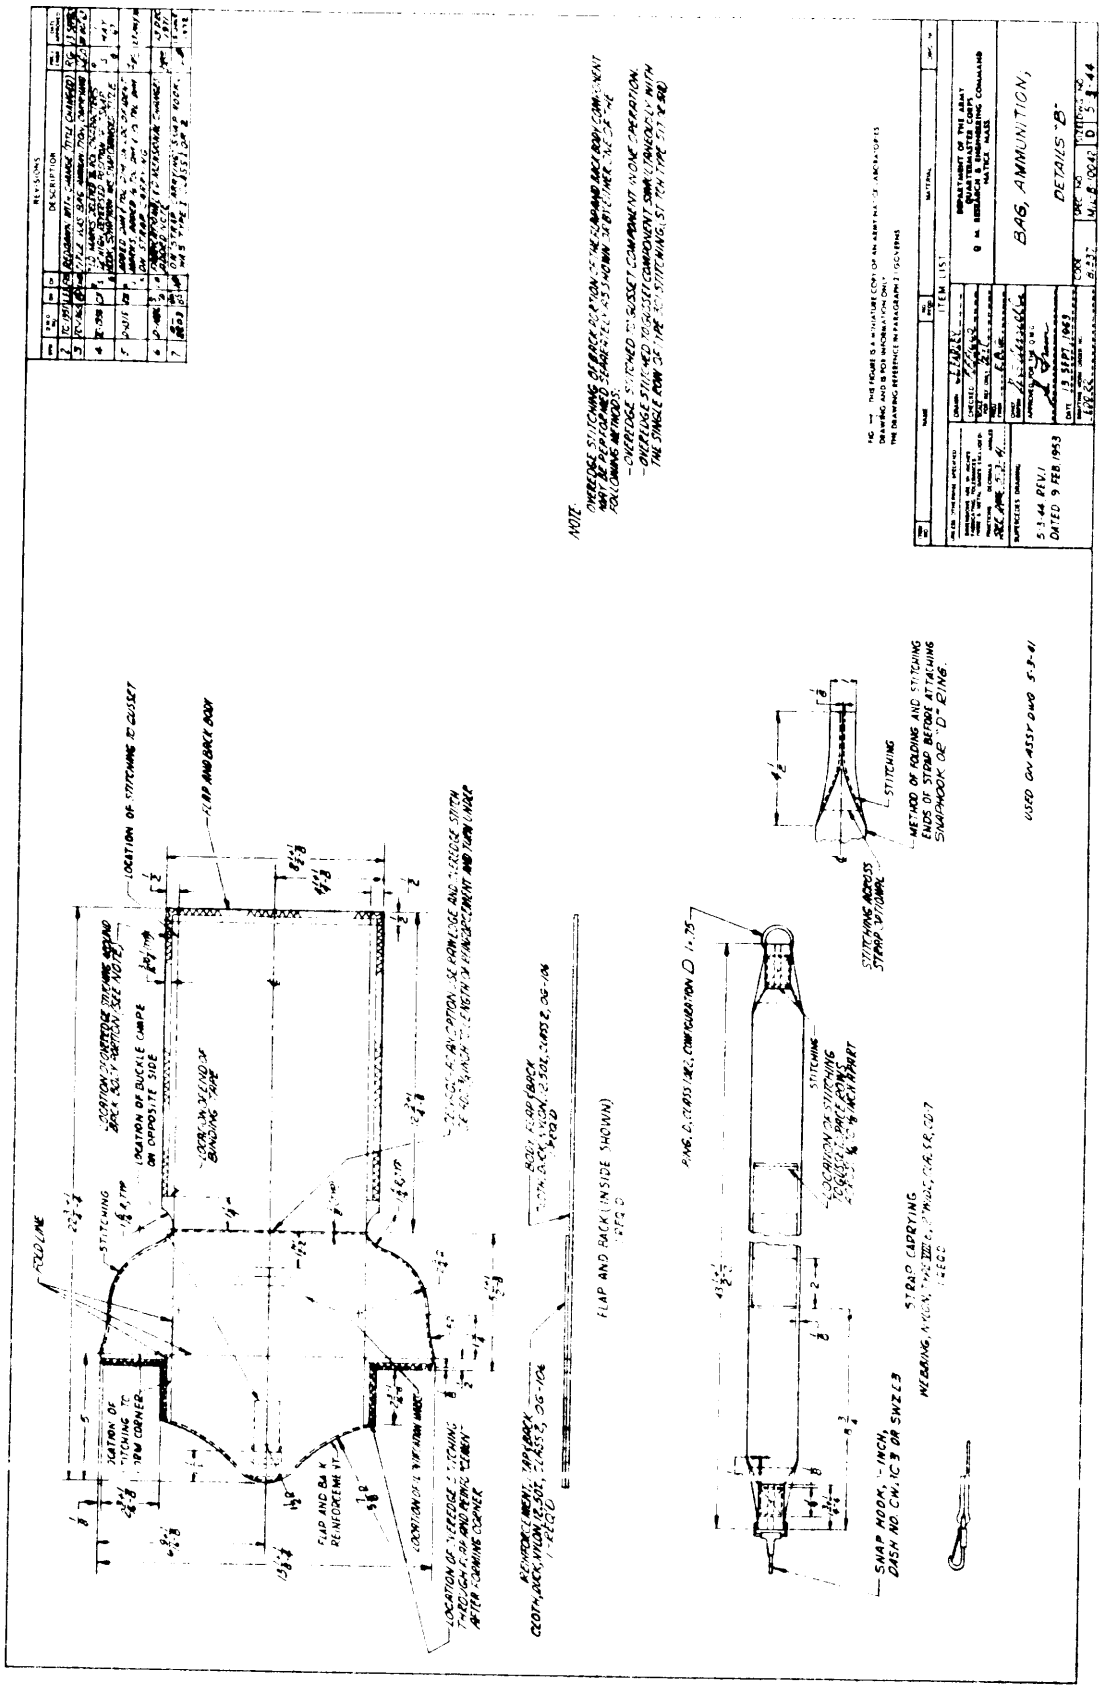

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

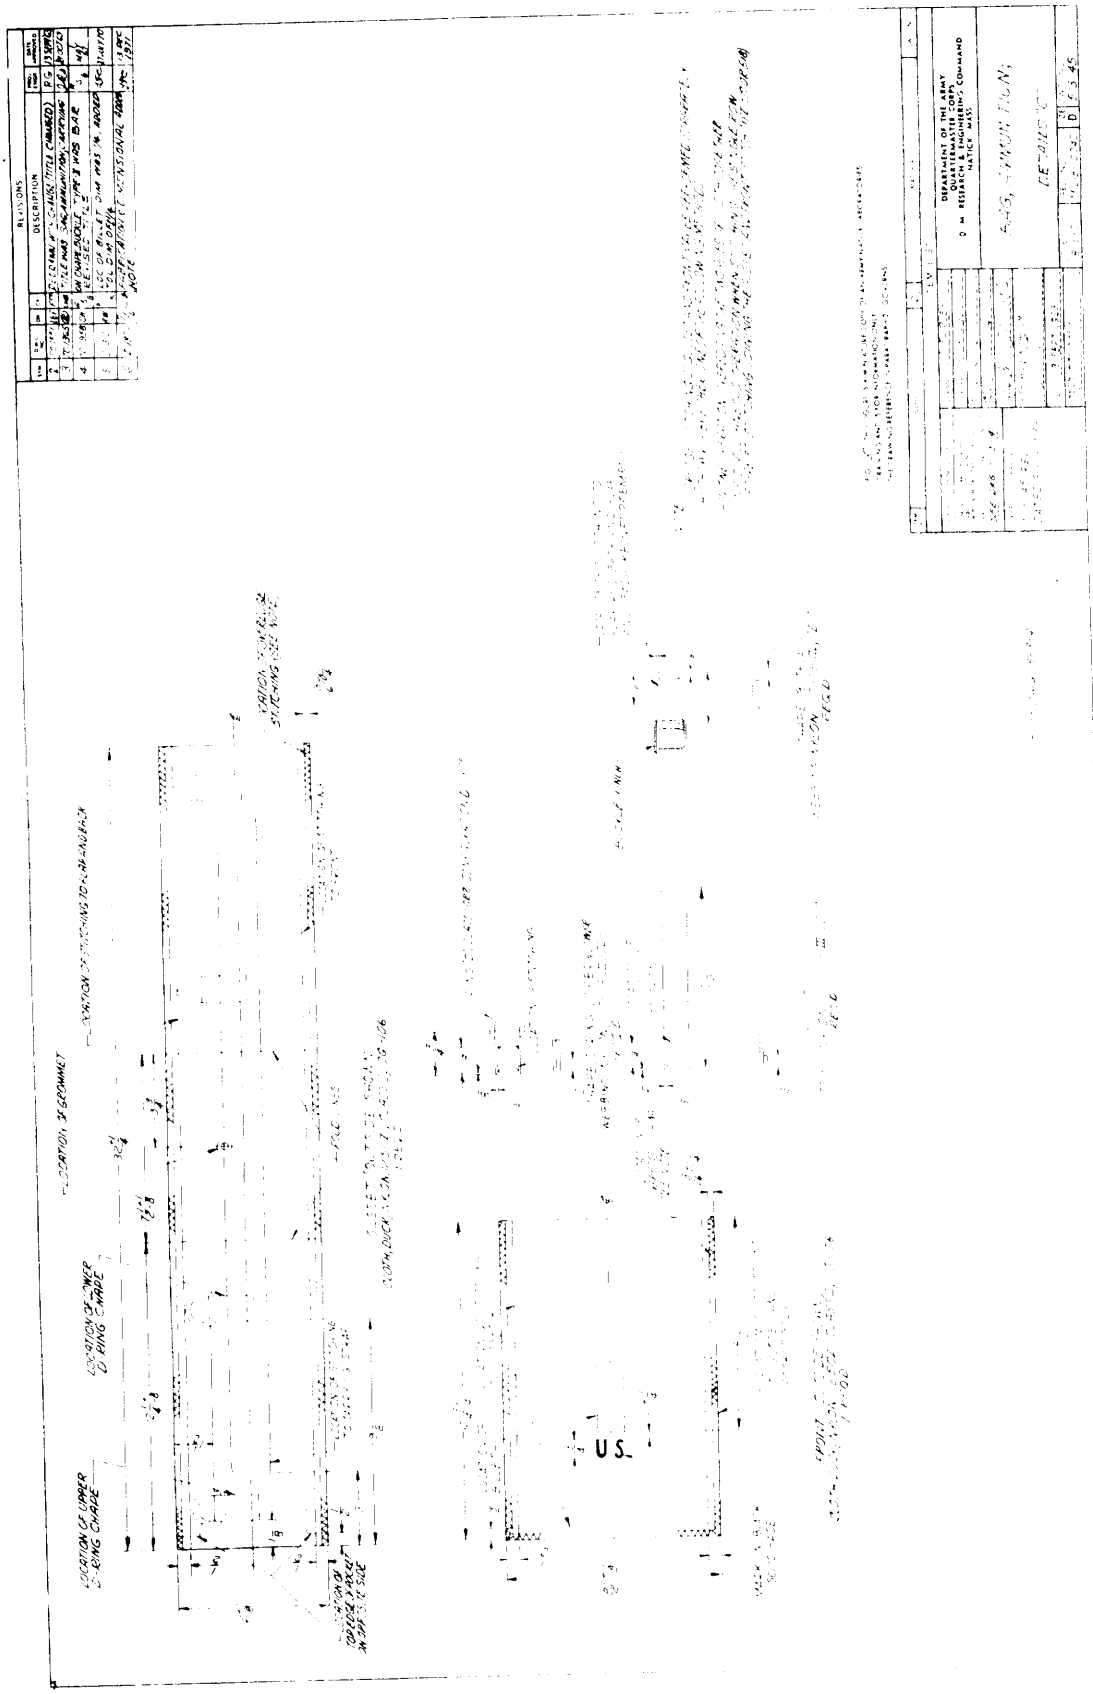

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Bag, Ammunition MIL-B-10042D

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:22Z
Check the source to verify that this is the current version before use.