
MILITARY SPECIFICATION SHEET

HOLDER, CRYSTAL, TYPE HC-26/U


The complete requirements for procuring the holder crystal described herein shall consist of this document and the latest issue of Specification MIL-H-10056.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

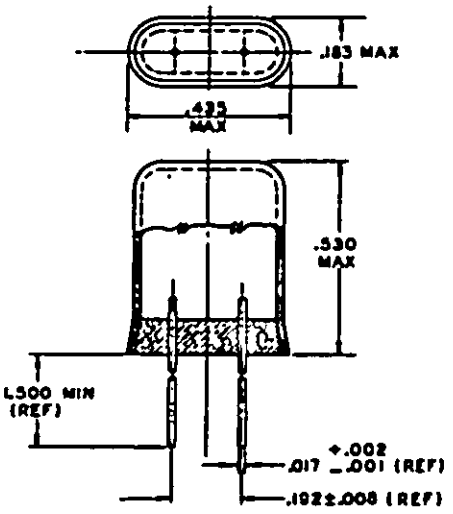


ASSEMBLY OF PARTS AFTER SEALING.

(A) TYPE HC-26/U CRYSTAL HOLDER

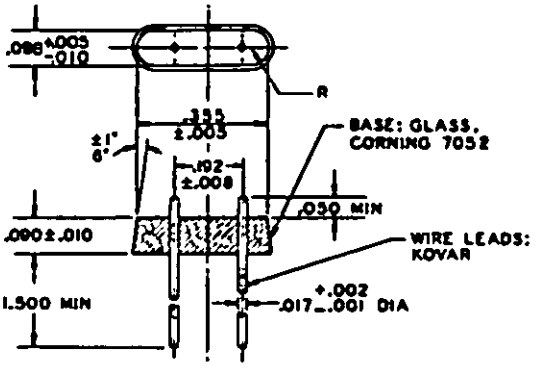

(C) BASE ASSEMBLY

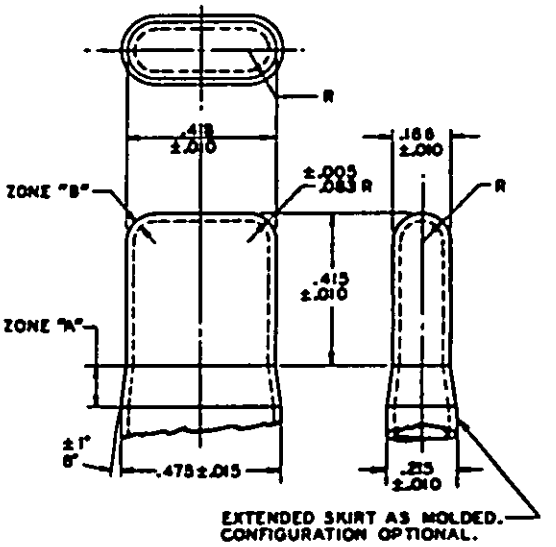

WALL THICKNESS REQUIREMENTS:

WALL THICKNESS .020-.030 THROUGHOUT, EXCEPT:
ZONE "A": .040 MAX ZONE "B": .010-.040

MATERIAL: GLASS, CORNING 7052

(B) BULB

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.040	1.02	.215	5.46
.002	.05	.050	1.27	.355	9.02
.005	.13	.083	2.11	.415	10.54
.008	.20	.090	2.29	.418	10.62
.010	.25	.098	2.49	.435	11.05
.015	.38	.166	4.22	.475	12.07
.017	.43	.183	4.65	.530	13.46
.020	.51	.192	4.88	1.500	38.10
.030	.76				

WHERE THE LEADS EMERGE FROM EITHER SURFACE OF THE BASE, GLASS MENISCUS SHALL NOT EXTEND MORE THAN .025 FROM THE POINT OF EMERGENCE FROM THE BASE.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Type HC-26/U crystal holder.

FSC 5955

Source: https://assist.dla.mil - Downloaded: 2026-10-17T13:25Z
Check the source to verify that this is the current version before use.

NOTE: NATO guidance type 14.

Custodians:
Army - EL
Navy - EC
Air Force - 84

Review activities:
Army - EL, MI, MU, SM
Navy - EC
Air Force - 11, 80
DSA - ES

User activities:
Army -
Navy - AS, CG, MC, OS, SH
Air Force - 17, 19, 84

Preparing activity:
Army - EL

(Project 5955-0385)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:25Z
Check the source to verify that this is the current version before use.