MILITARY SPECIFICATION SHEET

HOLDER (ENCLOSURE), CRYSTAL, TYPE HC-29/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the holder crystal described herein shall consist of this document and the latest issue of Specification MIL-H-10056.

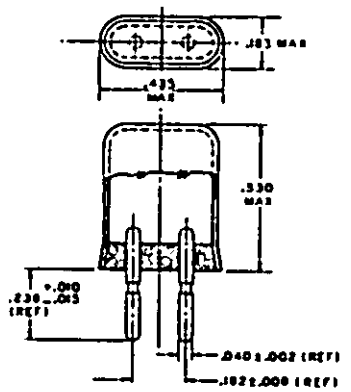

ASSEMBLY OF PARTS AFTER SEALING.

Ⓐ TYPE HC-29/U CRYSTAL HOLDER (ENCLOSURE)

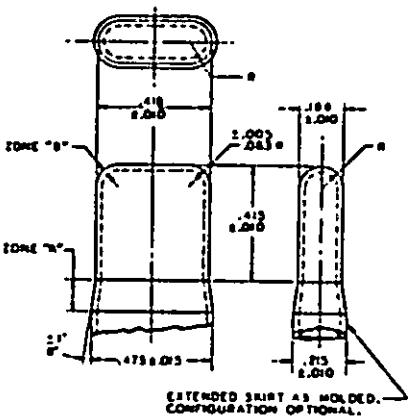

WALL THICKNESS REQUIREMENTS:

WALL THICKNESS .020-.030 THROUGHOUT, EXCEPT:
ZONE "A": .040 MAX ZONE "B": .040-.060

MATERIAL: GLASS, CORNING 7052

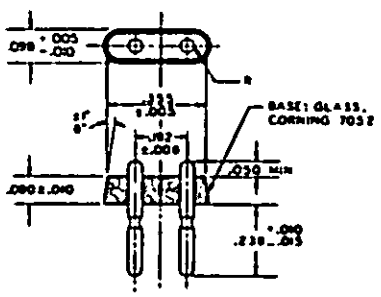

Ⓒ BASE ASSEMBLY

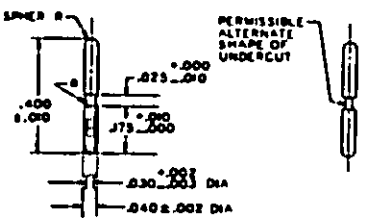

MATERIAL: KOVAR

Ⓓ PIN

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.025	.64	.166	4.22	.400	10.16
.003	.08	.030	.76	.175	4.45	.415	10.54
.005	.13	.040	1.02	.183	4.65	.418	10.62
.008	.20	.050	1.27	.192	4.88	.435	11.05
.010	.25	.083	2.11	.215	5.46	.475	12.07
.015	.38	.090	2.29	.238	6.05	.530	13.46
.020	.51	.098	2.49	.355	9.02		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
Ⓒ 3. The pin undercut can be omitted.

FIGURE 1. Type HC-29/U crystal holder (enclosure).

Ⓒ denotes changes

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:25Z
Check the source to verify that this is the current version before use.

© NOTE: NATO preferred type 20.

Custodians:
Army - EL
Navy - EC
Air Force - 84

Review activities:
Army - EL, MI, MU, SM
Navy - SH
Air Force - 11, 80, 85
DSA - ES

User activities:
Army -
Navy - AS, CG, MC, OS, SH
Air Force - 17, 19, 84

Civilian agencies:
DOC

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5955-0409-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:25Z
Check the source to verify that this is the current version before use.