MILITARY SPECIFICATION SHEET

HOLDER, CRYSTAL, TYPE HC-1A/U

The complete requirements for procuring the crystal holder described herein shall consist of this document and the latest issue of MIL-H-10056.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

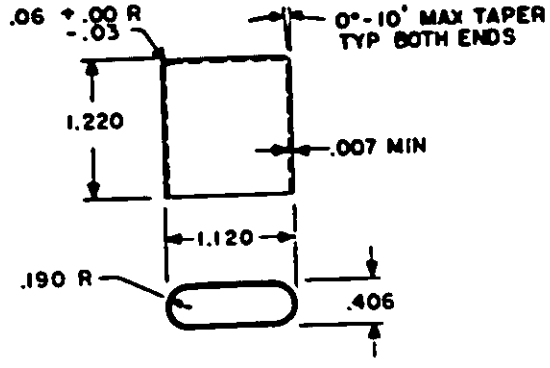

COVER

QQ-C-585, COMP NO.6, ANNEALED, SOFT TEMP



ASSEMBLY BEFORE SOLDERING

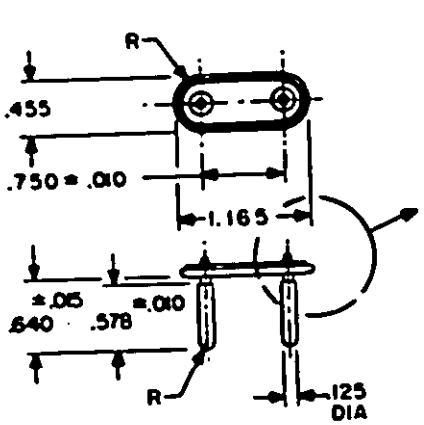

BASE

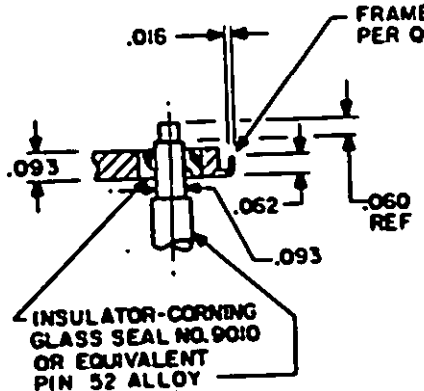

INCHES	MM
.007	.18
.010	.25
.015	.38
.016	.41
.030	.76
.060	1.52
.062	1.57
.093	2.36
.125	3.18
.190	4.83
.406	10.31
.455	11.56
.578	14.68
.640	16.26
.750	19.05
1.120	28.45
1.165	29.59
1.220	30.99
1.282	32.56

NOTES:
1. Dimensions are in inches
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm
3. Unless otherwise specified tolerance is ±.005 (.13mm)
4. After assembling, base assembly shall be hot-tin plated in accordance with type I finish M221 of MIL-F-14072

FIGURE 1 Type HC-1A/U Crystal Holder

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:26Z
Check the source to verify that this is the current version before use.

Requirements: Dimensions and configuration (See Figure 1).

Materials: See Figure 1.

Notes:
1. Replacement data: Crystal holder, type HC-1A/U is a replacement for type HC-1/U formerly covered by cancelled MIL-H-12783A, dated 25 May 1959.

2. The HC-1A/U crystal holder is a nonpreferred type and is not recommended for new design.

Custodians:
Army - EL
Navy - SH
Air Force - 85

Review activities:
Army - EL, MI, MU, SM
Navy - SH
Air Force - 11, 17, 85

User activities:
Army -
Navy - AS, CG, MC
Air Force - 14, 19

Preparing activity:
Air Force - 85

(Project 5955-0314)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:26Z
Check the source to verify that this is the current version before use.