

MILITARY SPECIFICATION SHEET

HOLDER, CRYSTAL, TYPE HC-33/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the crystal holder described herein shall consist of this specification and the latest issue of MIL-H-10056.

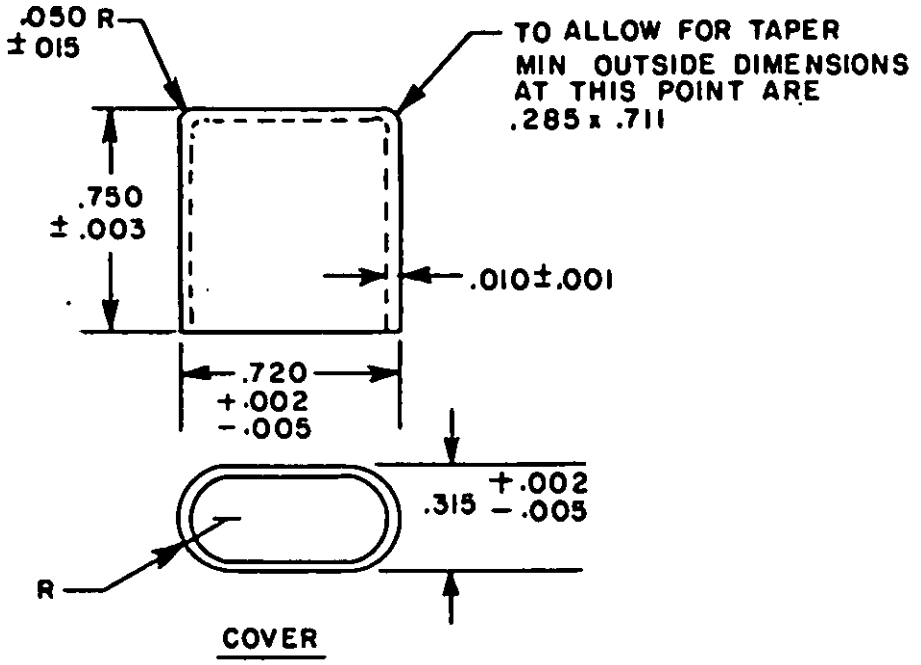

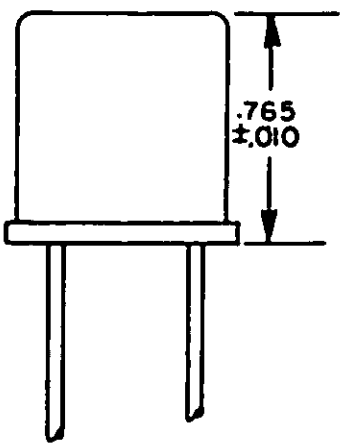


ASSEMBLY BEFORE SOLDERING

FIGURE 1. Type HC-33/U, crystal holder.

Ⓐ denotes changes

Source: https://assist.dla.mil - Downloaded: 2026-10-17T13:26Z
Check the source to verify that this is the current version before use.

FSC 5955

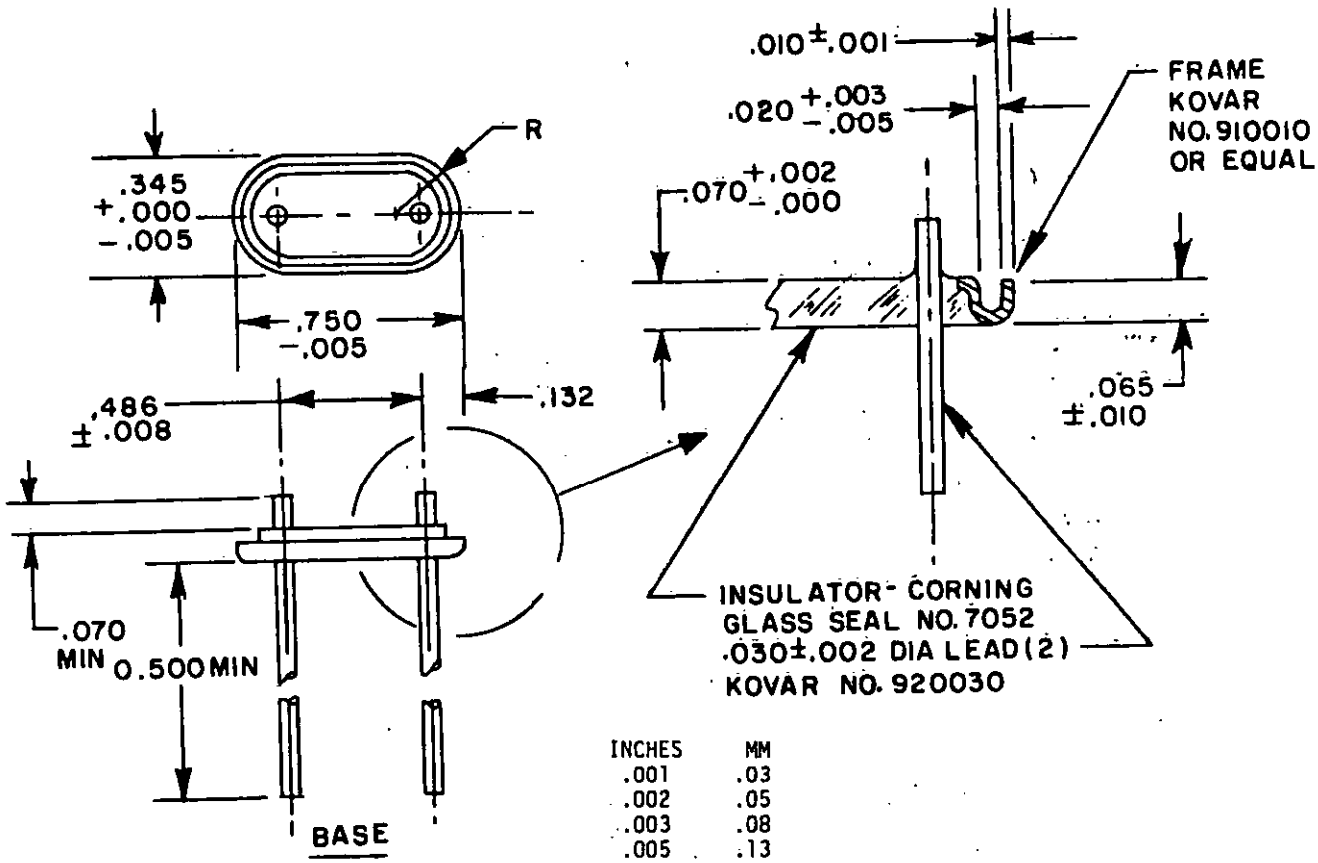

INCHES	MM
.001	.03
.002	.05
.003	.08
.005	.13
.008	.20
.010	.25
.015	.38
.020	.51
.030	.76
.050	1.27
.065	1.65
.070	1.78
.132	3.35
.285	7.24
.315	8.00
.345	8.76
.486	12.34
.500	12.70
.711	18.06
.720	18.29
.750	19.05
.765	19.43

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 on decimals.
4. After assembling, base assembly shall be hot-tin plated in accordance with type I finish M221 of MIL-F-14072.

FIGURE 1. Type HC-33/U, crystal holder - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration (see figure 1).

Materials: See figure 1.

Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - MI, AR, SM
Navy - SH
Air Force - 11, 17, 85
DLA - ES

User activities:
Army -
Navy - CG, MC
Air Force - 14, 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5955-0602-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:26Z
Check the source to verify that this is the current version before use.