INCH-POUND


MIL-H-10056/21C
28 June 1995
SUPERSEDING
MIL-H-0010056/21B(USAF)
10 September 1974
MIL-H-10056/21A
5 May 1969

MILITARY SPECIFICATION SHEET

HOLDER, CRYSTAL, TYPE HC-35/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specificatons and Standards (DoDISS) specified in the solicitation: MIL-H-10056.

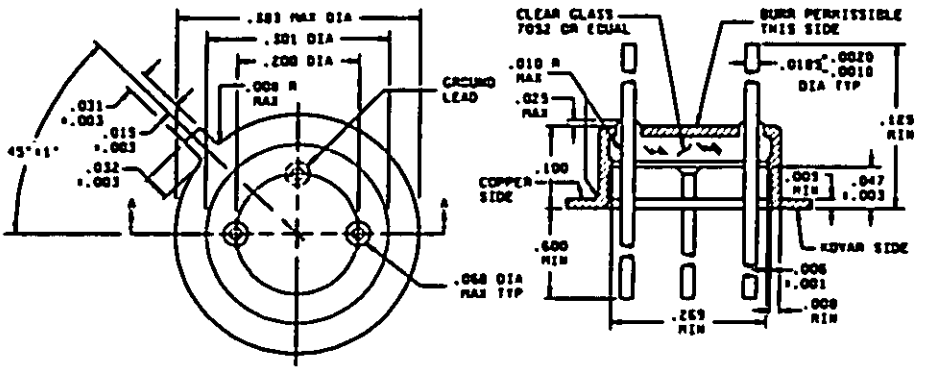

TOP VIEW SECTION A-A

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.0010	0.03	.010	0.25	.032	0.81	.200	5.08
.0020	0.05	.015	0.38	.047	1.19	.269	6.83
.003	0.08	.0185	0.47	.068	1.73	.301	7.65
.006	0.15	.025	0.64	.100	2.54	.383	9.73
.008	0.20	.031	0.79	.125	3.18	.600	15.24
.009	0.23						


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Material: Platform: Copper-clad kovar (iron-nickel-cobalt alloy) sheet 30/70 ratio; leads: Kovar.
5. Finish: Electroless nickel plating (where applicable) (150 microinches ±50 microinches).
6. Cold weld cover to header.

FIGURE 1. Dimensions for a 3 pin header of cold-weld crystal holder, type HC-35/U.


Ⓒ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:26Z
Check the source to verify that this is the current version before use.

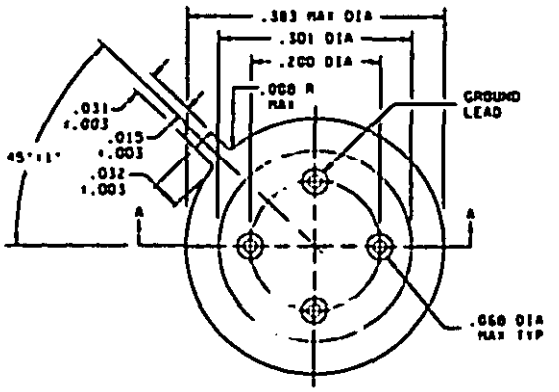

TOP VIEW

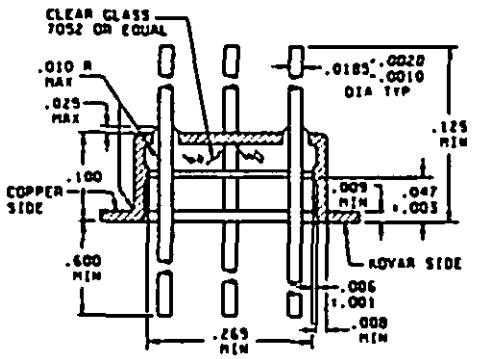


SECTION A-A

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.0010	0.03	.010	0.25	.032	0.81	.200	5.08
.0020	0.05	.015	0.38	.047	1.19	.269	6.83
.003	0.08	.0185	0.47	.068	1.73	.301	7.65
.006	0.15	.025	0.64	.100	2.54	.383	9.73
.008	0.20	.031	0.79	.125	3.18	.600	15.24
.009	0.23						

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unlesss otherwise specified, tolerance is ±.005 (0.13 mm).
4. Material: Platform: Copper-clad kovar (iron-nickel-cobalt alloy) sheet 30/70 ratio; leads: Kovar.
5. Finish: Electroless nickel plating (where applicable) (150 microinches ±50 microinches).
6. Cold weld cover to header.

FIGURE 2. Dimensions for a 4 pin header of cold-weld crystal holder, type HC-35/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:26Z
Check the source to verify that this is the current version before use.

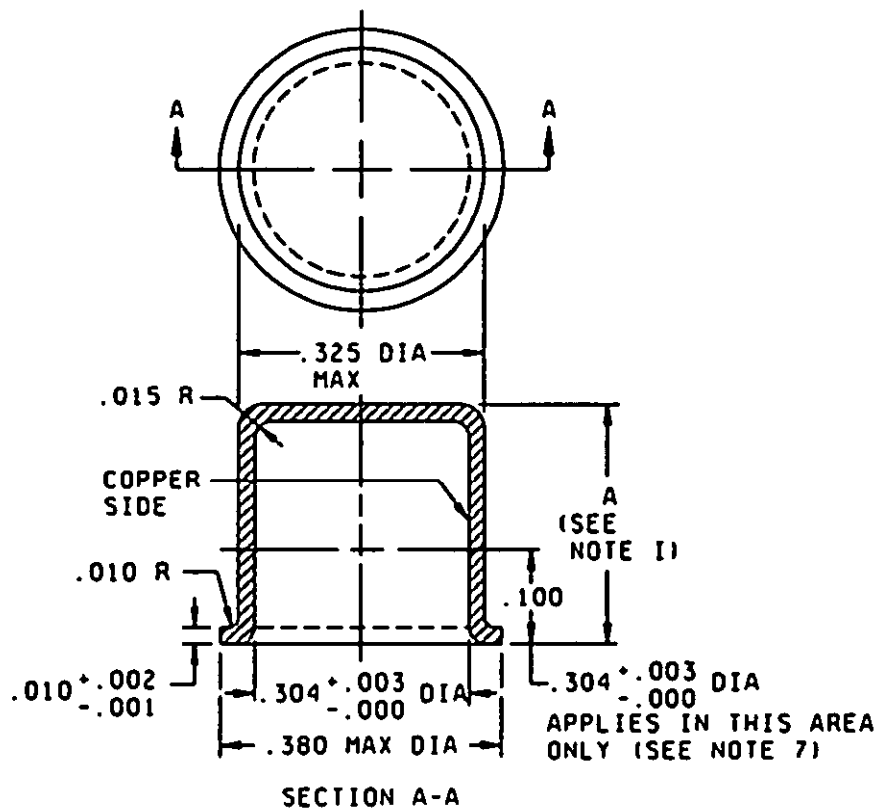

Inches	mm	Inches	mm
.001	0.03	.100	2.54
.002	0.05	.304	7.72
.003	0.08	.325	8.26
.010	0.25	.380	9.65
.015	0.38		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unlesss otherwise specified, tolerance is ±.005 (0.13 mm).
4. Material: Platform: Copper-clad kovar (iron-nickel-cobalt alloy) sheet 30/70 ratio; leads: Kovar.
5. Finish: Electroless nickel plating (where applicable) (150 microinches ±50 microinches).
6. Cold weld cover to header.

FIGURE 3. Dimensions for the cover of crystal holder, type HC-35/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration (see figure 1).

Materials: See figure 1.

Part or Identifying Number (PIN): M10056/21 - (and dash number from table I).

© TABLE I. Dash number and characteristics.

Dash number	A dimensions (FIGURE 4)	FIGURE
01	.245 +.005 -.000 (6.22 +0.13 -0.00)	1
02	.570 ±.010 (14.48 ±0.25)	1
03	.970 ±.010 (24.64 ±0.25)	1
04	1.525 ±.010 (38.74 ±0.25)	1
05	2.325 ±.010 (59.06 ±0.25)	1
06	.245 +.005 -.000 (6.22 +0.13 -0.00)	2

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AR, MI, SM
Navy - CG, MC,
Air Force - 14, 17, 19
DLA - ES

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5955-0636)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:26Z
Check the source to verify that this is the current version before use.