
MILITARY SPECIFICATION SHEET


HOLDER (ENCLOSURE), CRYSTAL, TYPE HC-36/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crystal holder described herein shall consist of this document and the latest issue of Military Specification MIL-H-10056.

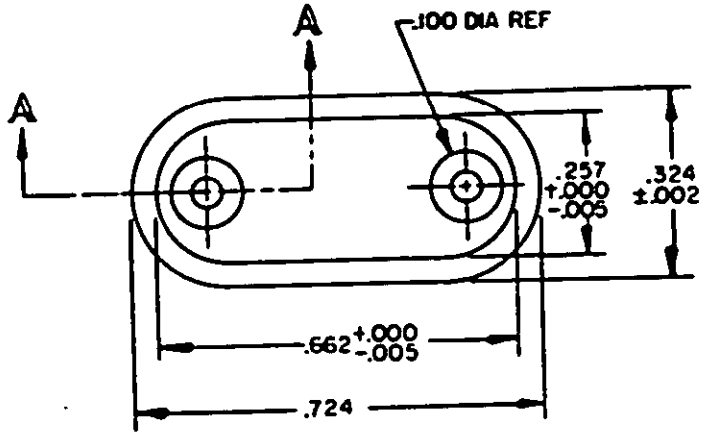

INCHES	MM
.002	.05
.005	.13
.008	.20
.010	.25
.015	.38
.025	.64
.035	.89
.050	1.27
.100	2.54
.150	3.81
.175	4.45
.238	6.05
.257	6.53
.324	8.23
.486	12.34
.662	16.81
.724	18.39

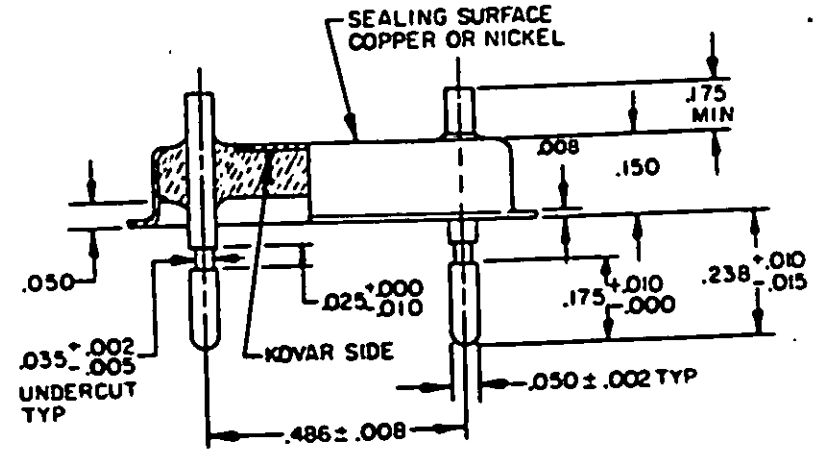


NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ± .005 (.13 mm).
4. Material: Platform - copper-clad kovar (iron-nickel-cobalt alloy) sheet 30/70 ratio; leads - kovar; insulator-clear glass type 7052 or equal.
5. Finish: Electroless nickel plating in accordance with Class 1 of MIL-C-26074.
6. This item is similar to the EIA item CO-16.
© 7. The pin undercut can be omitted.

FIGURE 1. Dimensions for header of cold-weld crystal holder (enclosure), type HC-36/U.

© denotes changes

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:26Z
Check the source to verify that this is the current version before use.

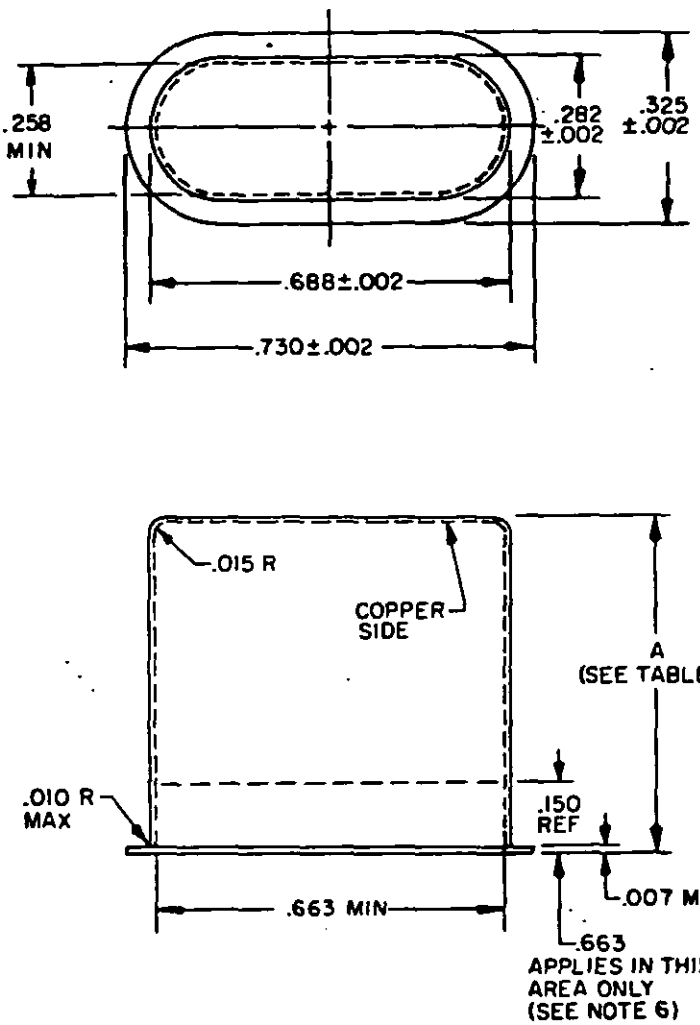

INCHES	MM
.002	.05
.007	.18
.010	.25
.015	.38
.150	3.81
.258	6.55
.282	7.16
.325	8.26
.663	16.84
.688	17.48
.730	18.54

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005(.13 mm).
4. Material: Copper-clad kovar, or copper-clad steel, or nickel, grade A233, A270, or OFHC copper.
5. Finish: Electroless nickel plating in accordance with Class 1 of MIL-C-26074.
6. .663(16.84 mm) dimension may vary ±.005(.13 mm) beyond .150(3.81 mm) dimension.
7. Bottom flange surface to be smooth and free of tool marks and scratches.

FIGURE 2. Dimensions for the cover of cold-weld crystal holder (enclosure), type HC-36/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Materials: See figures 1 and 2.

TABLE I. Dash numbers and overall external - cover height.

Dash number	A
1	0.570 (14.48)
2	0.750 (19.05)
3	1.485 (37.72)
4	1.980 (50.29)
5	2.485 (63.12)

Part number: M10056/23- (and dash number from table 1).

Custodians:
Army - EL
Navy - EC
Air Force - 84

Review activities:
Army - EL, MI, MU, SM
Navy -
Air Force - 11, 80, 85
DSA - ES

User activities:
Army -
Navy - AS, CG, MC, OS, SH
Air Force - 17, 19, 84

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5955-0409-3)

Source: https://assist.dla.mil -- Downloaded: 202640-17T13:26Z
Check the source to verify that this is the current version before use.