MILITARY SPECIFICATION SHEET

HOLDER (ENCLOSURE), CRYSTAL, TYPE HC-18/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the crystal holder described herein shall consist of this document and the latest issue of Military Specification MIL-H-10056.


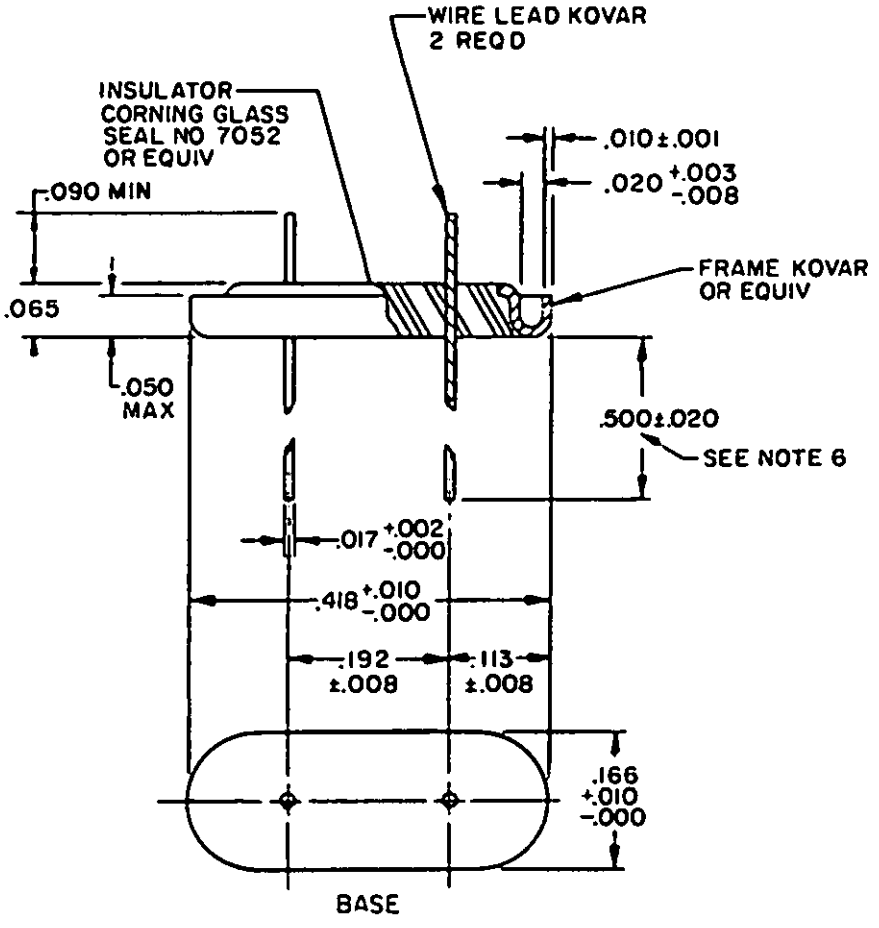


FIGURE 1. Type HC-18/U crystal holder (enclosure).


FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:24Z
Check the source to verify that this is the current version before use.

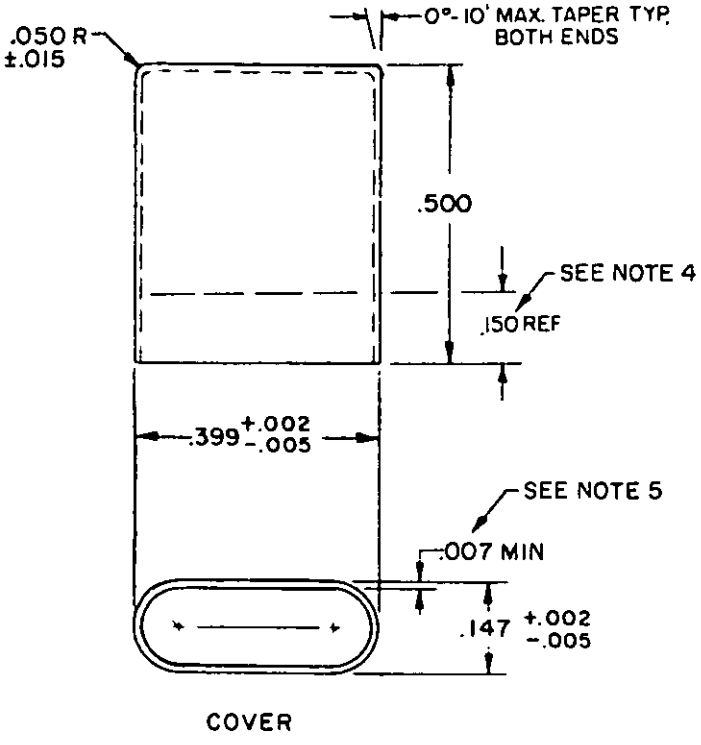

COVER

PER QQ-C-585 COMPOSITION
NO. 6 ANNEALED SOFT TEMPER



ASSEMBLY BEFORE SEALING

INCHES	MM	INCHES	MM
.001	.03	.065	1.65
.002	.05	.090	2.35
.003	.08	.113	2.87
.005	.13	.147	3.73
.007	.18	.166	4.22
.008	.20	.192	4.88
.010	.25	.399	10.13
.015	.38	.418	10.62
.017	.43	.500	12.70
.020	.51	.525	13.34
.050	1.27		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. .399 (10.13 mm) dimension may vary ±.005 (.13 mm) beyond .150 (3.81 mm) dimension.
5. Starting material thickness is .010 ±.001.
6. If 1.500 (38.10 mm) minimum lead is required, it shall be so specified in the contract or purchase order.

FIGURE 1. Type HC-18/U crystal holder (enclosure) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Materials: See figure 1. After assembling, base assembly (lead and frame) shall be hot-tin-dipped or electro-tin-plated in accordance with type 1 finish of MIL-F-14072.

NATO preferred style number 3.

Custodians:
Army - EL
Navy - EC
Air Force - 84

Review activities:
Army - MI, MU, SM,
Navy - SH
Air Force - 11, 80
DSA - ES

User activities:
Army -
Navy - AS, CG, MC, OS
Air Force - 17, 19, 84

Civil agency:
DCG

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5955-0405-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:24Z
Check the source to verify that this is the current version before use.