
MILITARY SPECIFICATION SHEET

CONNECTOR, TELECOMMUNICATION, POLARIZED SHELL, RECEPTACLE, FEMALE, PRINTED CIRCUIT BOARD, SOLDER CONTACT, SCREWLOCK

This specification sheet is approved for use by the Air Force Acquisition Logistics Division, Directorate of Electronic Support (AFALD/PTSP), Gentile Air Force Station, OH 45444, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-83515/6 (USAF).

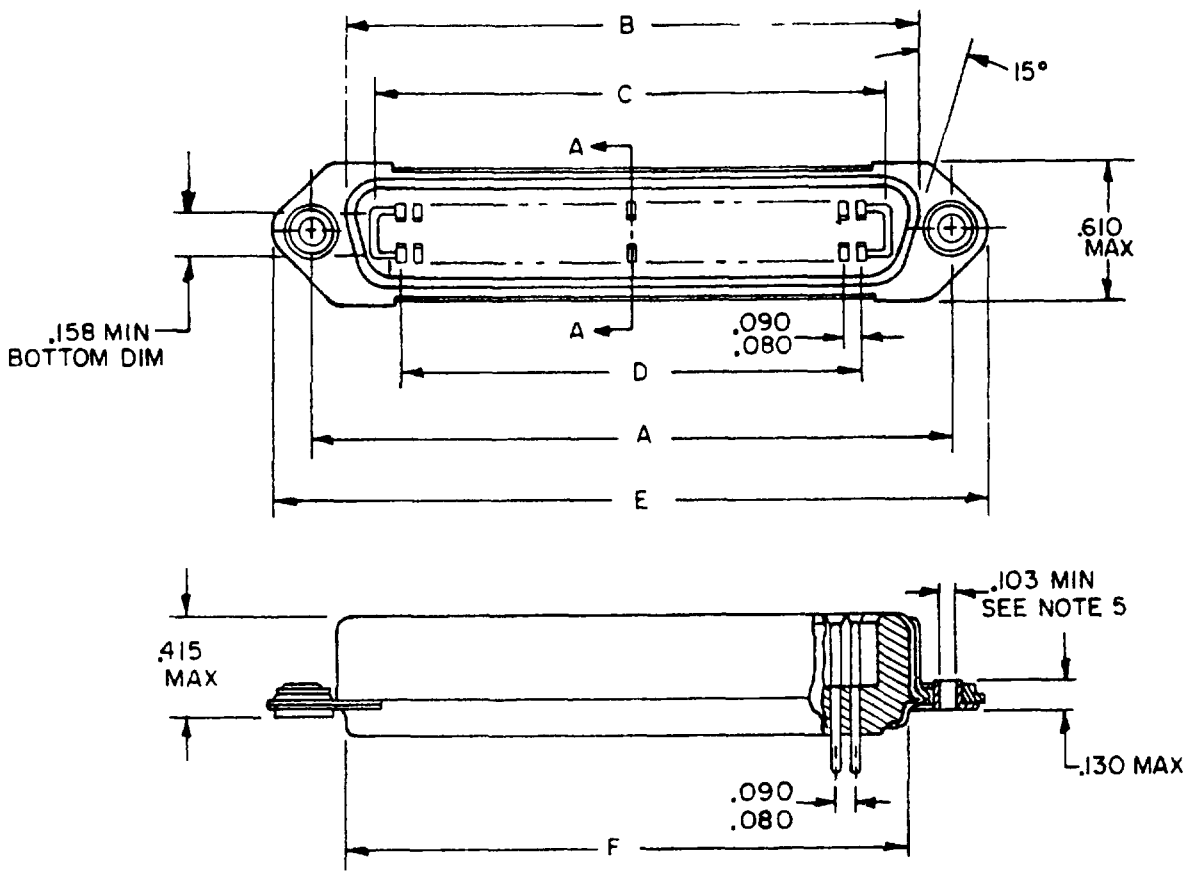


INCHES	MM	INCHES	MM	INCHES	MM
036	91	103	2.62	.172	4.37
.040	1.02	.130	3.30	.300	7.62
.080	2.03	.147	3.73	.415	10.54
082	2.08	153	3 89	.475	12.06
088	2.24	.158	4.01	.610	15 49
090	2 29	166	4.22	.700	17 78

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 00 inch = 25.4 mm.
3. All undimensioned pictorial representations are for reference purposes only.
4. All dimensions are after plating.
5. Bushing allows center conductor to float .020 min, in any radial direction from mounting centers.

FIGURE 1 Dimensions and configurations.


FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

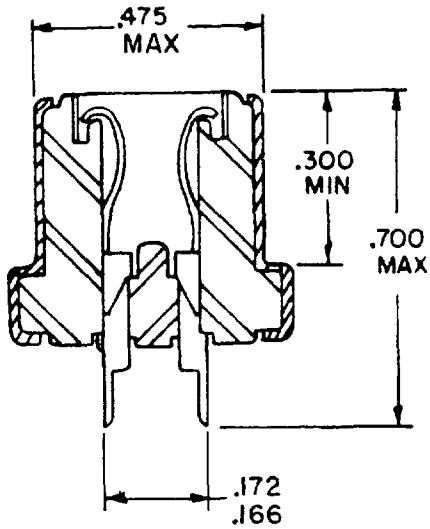

SECTION A-A

Size	A		B max	C Min	D		E max	F max
	Min	Max			Min	Max		
14	1 412 (35 86)	1.422 (36.12)	1.000 (25.40)	.695 (17.65)	.505 (12.83)	.515 (13.08)	1.750 (44.45)	.910 (23.11)
24	1.837 (46.66)	1.847 (46.91)	1 429 (36.30)	1 119 (28.42)	.930 (23.62)	.940 (23.88)	2.175 (55.25)	1.335 (33.91)
36	2.347 (59.61)	2.357 (59.87)	1.930 (49.02)	1.630 (41 40)	1.440 (36.58)	1.450 (36.83)	2.685 (68.20)	1.845 (46.86)
50	2.942 (74.73	2.952 (74.98)	2.530 (64.29)	2.224 (56.49)	2.035 (51.69)	2.045 (51.94)	3.280 (83.31)	2.440 (61.98)

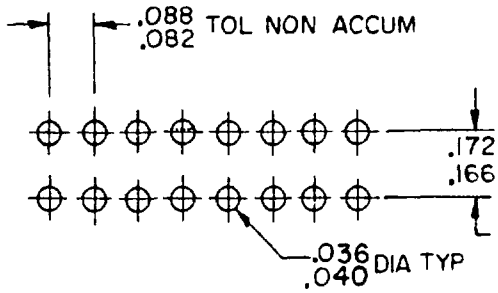

MOUNTING HOLES FOR P.C. BOARD

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration. See figure 1.

Specified mating connector: For testing, the specified mating connector shall be as specified in table I.

Operating temperature range: -55° to +125°C.

Contact current rating: 5 amperes maximum per contact.

Part number M83515/5-(dash number from table II).

TABLE I. Mating connector.

Plug dash number	Mating connector	Mating connector	Mating connector
01	M83515/1-01	M83515/3-01	M83515/5-01
02	M83515/1-02	M83515/3-02	M83515/5-02
03	M83515/1-03	M83515/3-03	M83515/5-03
04	M83515/1-04	M83515/3-04	M83515/5-04

TABLE II. Dash number.

Dash number	Number of contacts
01	14
02	24
03	36
04	50

Custodian:
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

User activities:
Air Force - 11, 17, 19

Preparing activity:
Air Force - 85

(Project 5935-F114-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-83513/6(USAF)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE LOGISTICS AGENCY

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 4966 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Directorate of Electronic Support
ATTN: AFALD/PTS
Gentile AFS OH 45444

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:30Z
Check the source to verify that this is the current version before use.