INCH-POUND

MIL-C-83513/6C
31 March 1989
SUPERSEDING
MIL-C-83513/6B
7 March 1986

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, RECTANGULAR, PLUG, MICROMINIATURE, POLARIZED SHELL, PIN CONTACTS, CLASS P, SOLDER TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-83513.

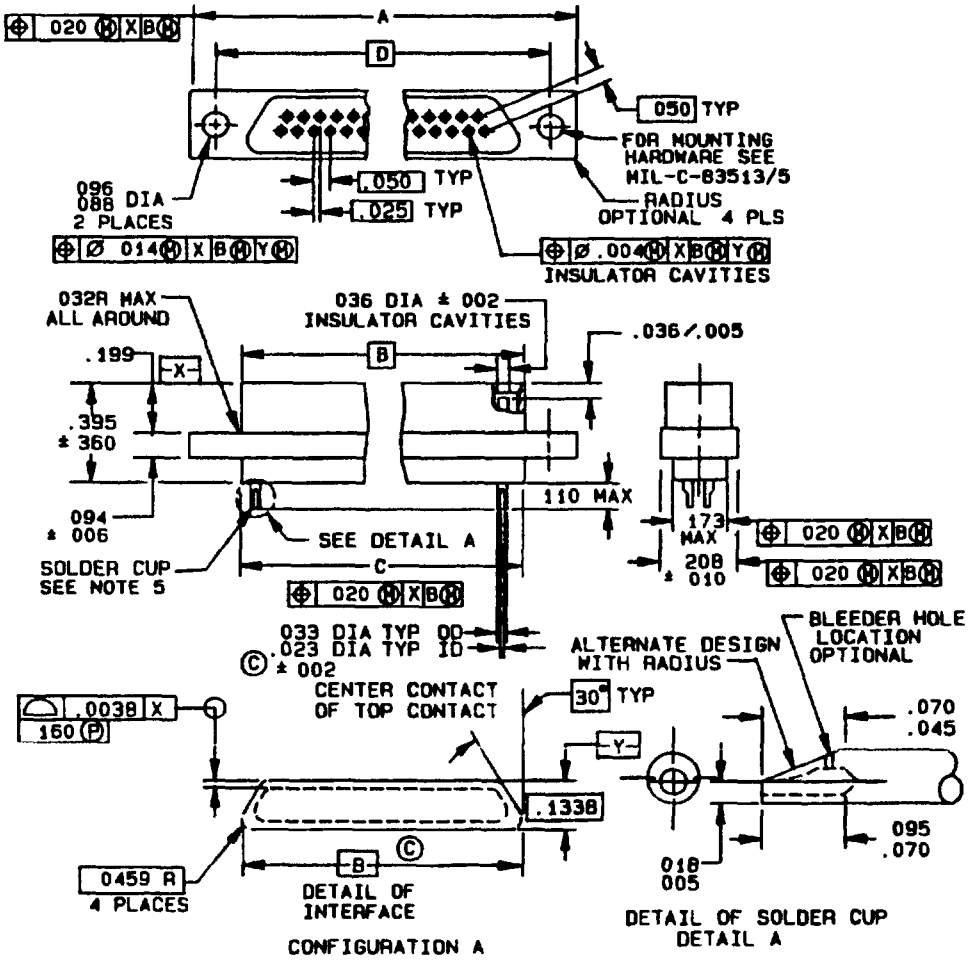


FIGURE 1. Connector, plug (.050 spacing).

© denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.

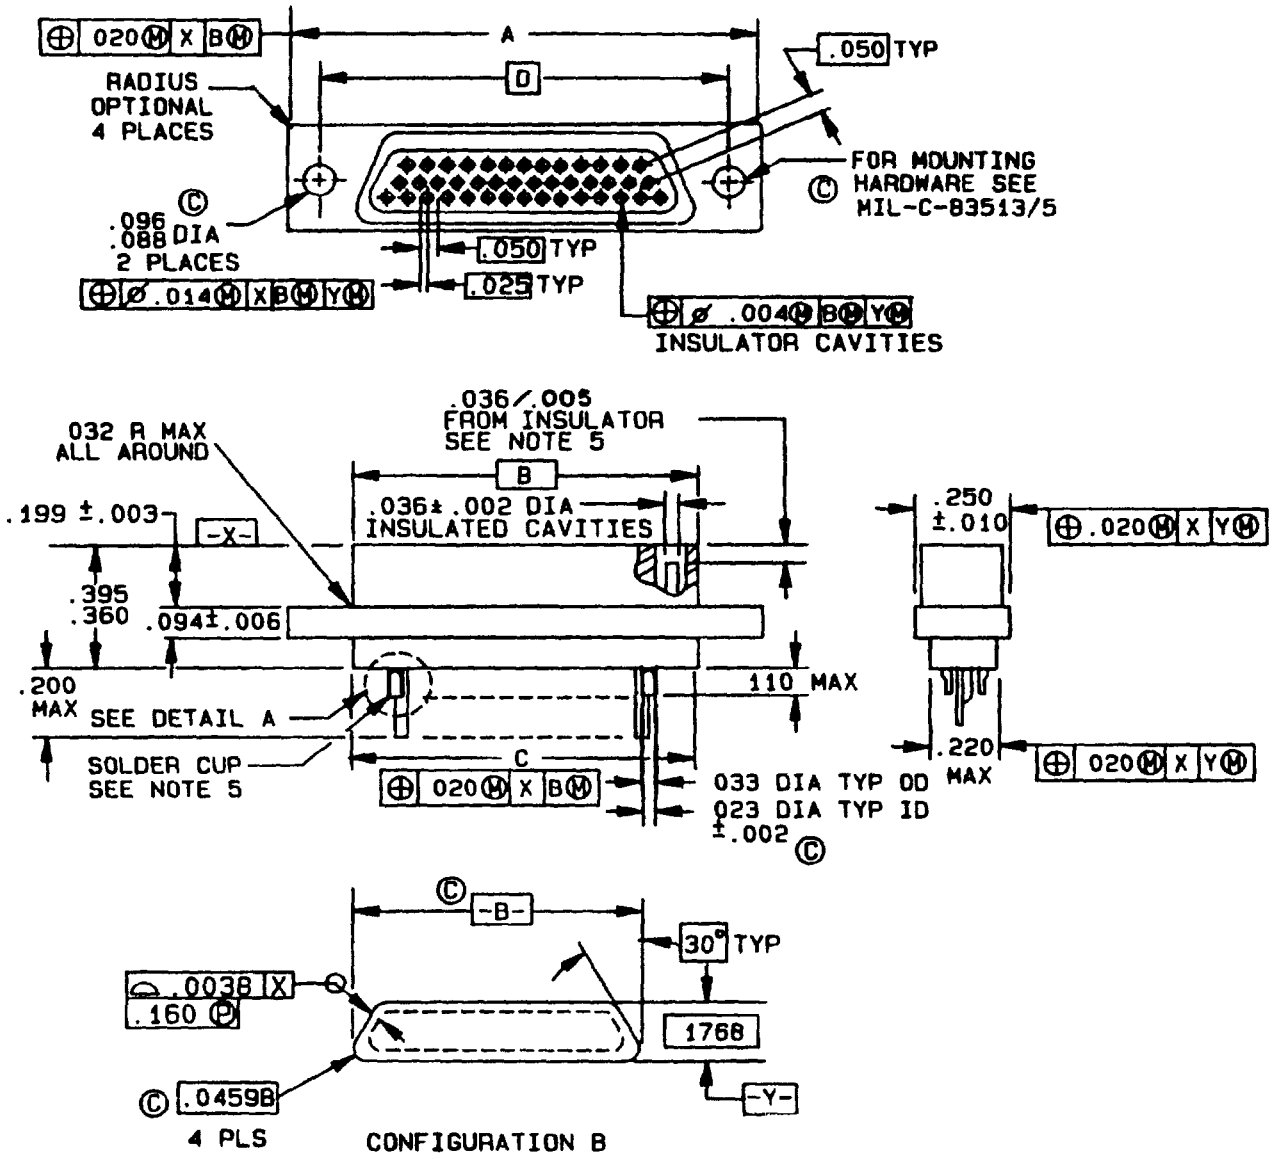


FIGURE 1 Connector, plug (.050 spacing) - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.


Number of cavities	A ±.010	B BSC	C +.010 -.018	D BSC
9	.778 (19.76)	.2918 (7.412)	.398 (10.11)	.565 (14.35)
15	.928 (23 57)	.4418 (11.222)	.548 (13.92)	715 (18.16)
21	1.078 (27.38)	.5918 (15.032)	.698 (17.73)	.865 (21.97)
25	1.178 (29.92)	.6918 (17.572)	.798 (20.27)	.965 (24.51)
31	1.328 (33.73)	.8418 (21.382	.948 (24.08)	1 115 (28.32)
37	1.478 (37.54)	.9918 (25.192)	1.098 (27 89)	1.265 (32.13)
51	1 428 (36 27)	.9418 (23.922)	1.048 (26.62)	1.215 (30.86)

NOTES:
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Metric equivalents are in parentheses or columns.
5. Solder cup will accept size 26 AWG maximum wire.


Inches	mm
.0019	0.048
.002	0.05
.0038	0.097
.004	0.10
.005	0.13
.006	0.15
.010	0.25
.014	0.36
.018	0.46
.023	0.58
.025	0.64
.027	0.69
.032	0.81
.033	0.84
.036	0.91
.045	1.14
.0452	1.148
.0459	1.166
.050	1.27
0669	1.699
.070	1.78
.088	2.24
.0884	2.245
.093	2.36
.094	2.39
.095	2.41
.110	2.79
.1138	2.89
.1342	3.409
.135	3.43
.137	3.48
.154	3.91
.173	4.39
.1772	4.501
.180	4.57
.191	4.85
.200	5.08
.208	5.28
.220	5.59
.250	6.35
.340	8.64
.375	9.52

FIGURE 1. Connector, plug (.050 spacing) - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.




9 CAVITY

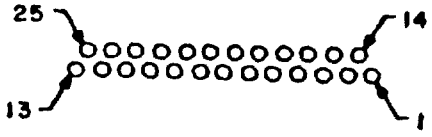


25 CAVITY




15 CAVITY

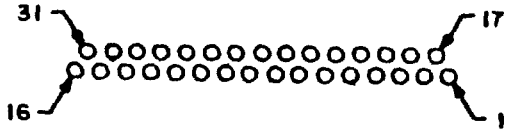


31 CAVITY

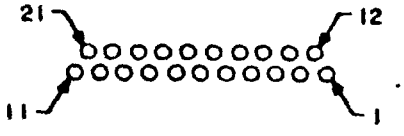

21 CAVITY

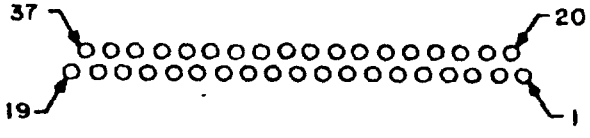

37 CAVITY

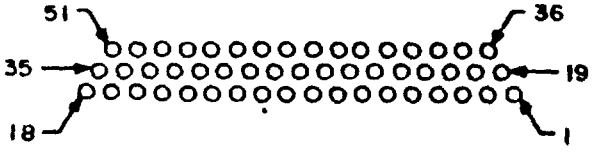

51 CAVITY

NOTE: Engaging face of pin insert shown.
Cavity identification numbers are for reference only and do not appear on part.

FIGURE 2. Insert arrangement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1. This specification sheet describes the pin side of a rectangular, plastic shell connector. This connector uses reverse gender contacts, i.e., the live pin recessed in the insulator with the static socket protruding from a shrouded interface.

Contact identification: See figure 2 for contact layout numbering.

Contact connection: The pin contact (being recessed in the insulator) is normally connected to the live side of the circuit.

Current rating, maximum: 3 amperes per contact.

Mounting and mating hardware: Hardware is to be ordered separately (see MIL-C-83513/5, configurations A and B).

Mating receptacle: Shall conform to MIL-C-83513/7 or MIL-C-83513/9.

Example of part number:

M83513/06- (Specification sheet number) A (Insert arrangement (see figure 2))

A = 9
B = 15
C = 21
D = 25
E = 31
F = 37
G = 51

CONCLUDING MATERIAL

Custodians:
Army - CP
Navy - EC
Air Force - 85

Review activities:
Navy - AS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, ME
Navy - CG, MC

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3637-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.