METRIC

MIL-C-83527/2B
8 June 1992
SUPERSEDING
MIL-C-83527/2A
28 December 1988

MILITARY, SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, RECTANGULAR, MULTIPLE INSERT TYPE, RACK TO PANEL, ENVIRONMENT RESISTING, 150°C CONTINUOUS OPERATING TEMPERATURE, SHELL SIZE 2

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-83527

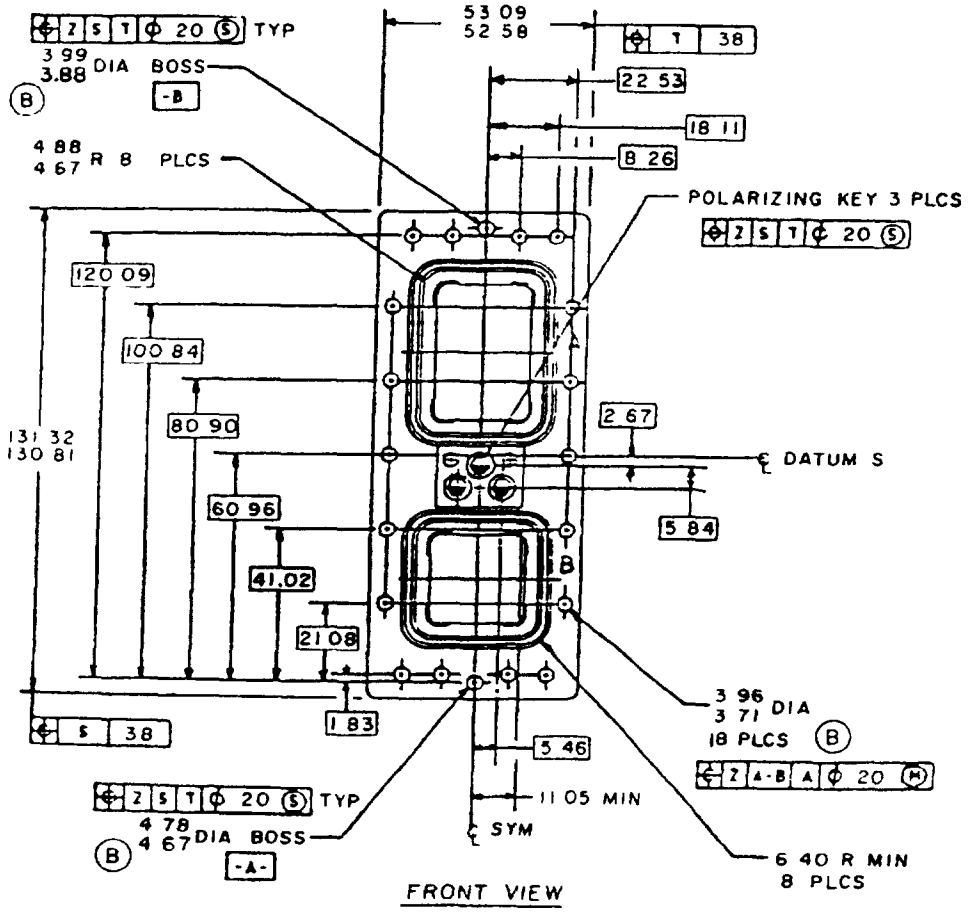


FIGURE 1 Connector, receptacle

Ⓑ denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

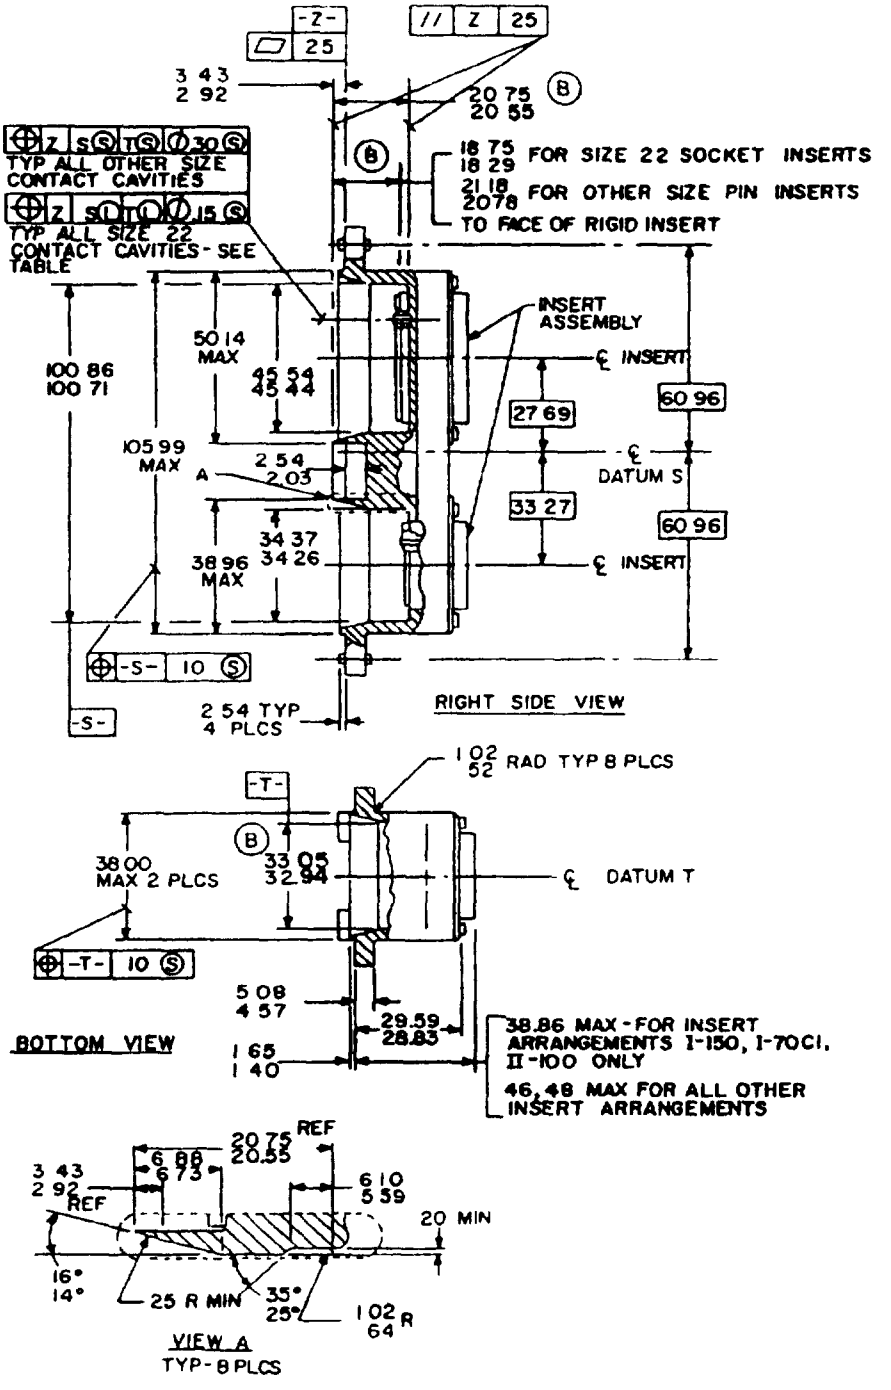


FIGURE 1 Connector, receptacle - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

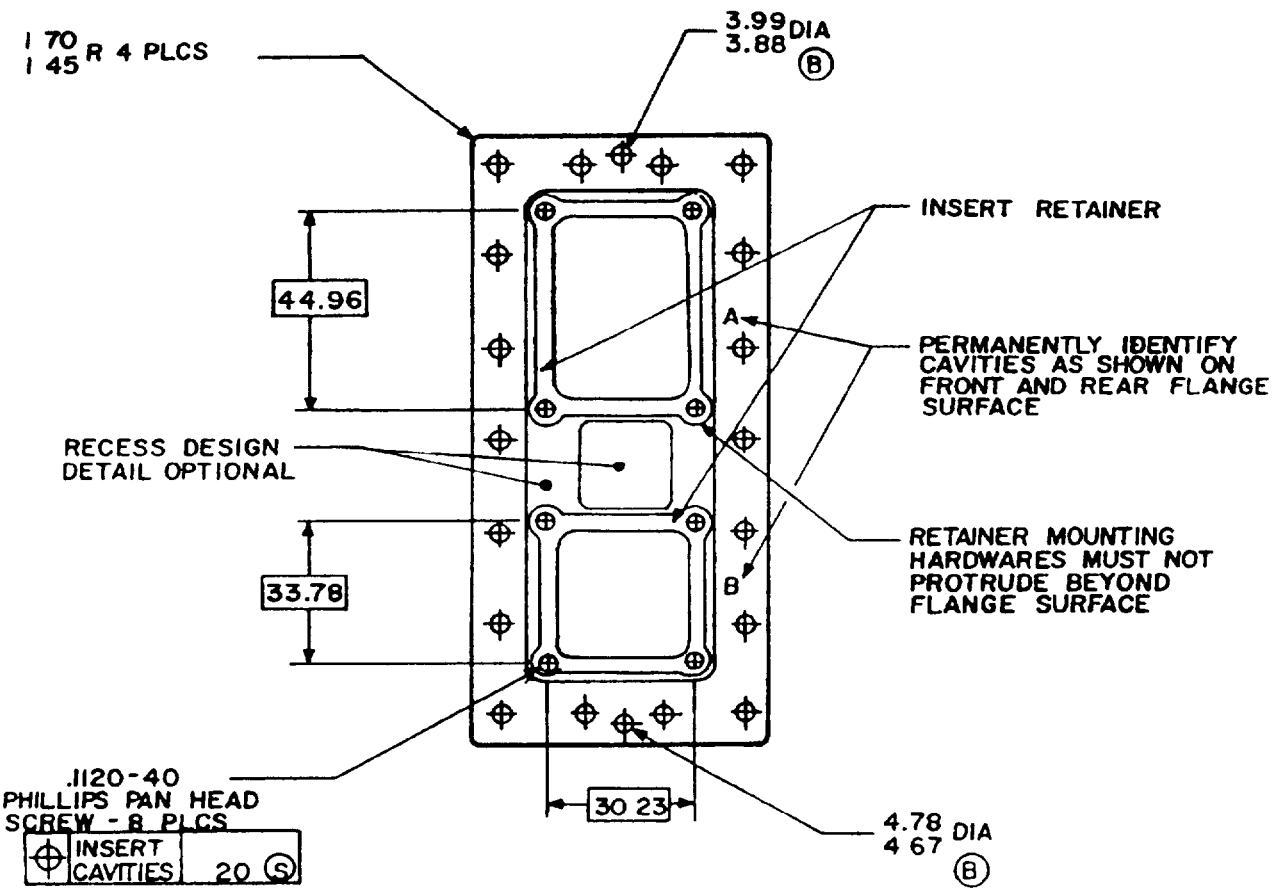


FIGURE 1 Connector, receptacle - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

Datum T	Datum S		
	100.71 (3 965)	100 74 (3.966)	100 76 (3 967)
32 94 (1 297)	0 30 (012)	0 30 (012)	0 30 (012)
32 97 (1 298)	0 28 (011)	0 28 (011)	0 28 (011)
32 99 (1 299)	0 25 (010)	0 25 (010)	0 25 (010)
33 02 (1 300)	0 23 (009)	0 23 (009)	0 23 (009)
33 05 (1 301)	0 20 (008)	0 20 (008)	0 20 (008)
100 79 (3 968)	100 81 (3 969)	100 84 (3 970)	100 86 (3 971)
	Datum S		
0 28 (011)	0 25 (010)	0 23 (009)	0 20 (008)
0 25 (010)	0 23 (009)	0 23 (009)	0 20 (008)
0 23 (009)	0 23 (.009)	0 20 (008)	0 18 (007)
0 23 (009)	0 20 (008)	0 18 (007)	0 18 (007)
0 20 (008)	0 18 (007)	0 18 (007)	0 15 (006)

FIGURE 1 Connector, receptacle - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

mm	Inch	mm	Inch	mm	Inch	mm	Inch
0 10	004	3 71	146	11 05	435	41 02	1 615
0 15	006	3 88	153	16 97	668	45 44	1 789
0 20	008	3 91	154	17 58	692	45 54	1 793
0 25	010	3 96	156	18 11	713	46 48	1 830
0 30	012	3 99	157	20 55	809	50 14	1 974
0 38	015	4 57	180	21 08	830	52 58	2 070
0 79	031	4 67	184	22 53	887	53 09	2 090
1 40	055	4 70	185	27 69	1 090	60 96	2 4
1 45	057	4 78	188	32 94	1 297	80 90	3 185
1 65	065	4 88	192	33 05	1 301	100 71	3 965
1 70	067	5 08	2	33 10	1 303	100 84	3 970
1 83	072	5 46	215	33 27	1 310	100 86	3 971
2 03	080	5 84	230	34 26	1 349	105 99	4 173
2 11	083	6 40	252	34 37	1 353	120 09	4 728
2 54	1	8 26	325	38 00	1 496	130 81	5 15
2 67	105	10 80	425	38 96	1 534	131 31	5 170
		10 92	430				

NOTES
1. Dimensions are in millimeters.
2. Inch equivalents are in parentheses
3. Inch equivalents are given for general information only

FIGURE 1 Connector, receptacle - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS


Dimensions and configuration Shall be in accordance with figure 1

Contacts See MIL-C-39029/93, /94, /96, /97, and /99

Inserts See MIL-STD-1842 and MIL-C-83527/8

Mating connector See MIL-C-83527/1

Military Part or Identifying Number (PIN)

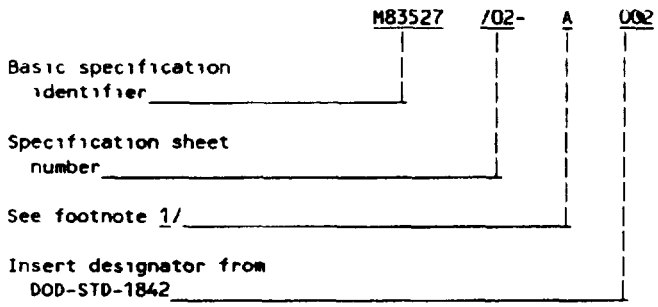

1/ "A" designator for insert with contacts, "B" designator for insert without contacts

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5935-3802-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.