METRIC

MIL-DTL-83527/5C
w/AMENDMENT 1
15 April 2014
SUPERSEDING
MIL-DTL-83527/5C
13 January 2004

DETAIL SPECIFICATION SHEET

CONNECTOR, PLUS, ELECTRICAL, RECTANGULAR, MULTIPLE INSERT TYPE, RACK TO PANEL, ENVIRONMENT RESISTING, 150°C CONTINUOUS OPERATING TEMPERATURE, SHELL SIZE 4

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83527.

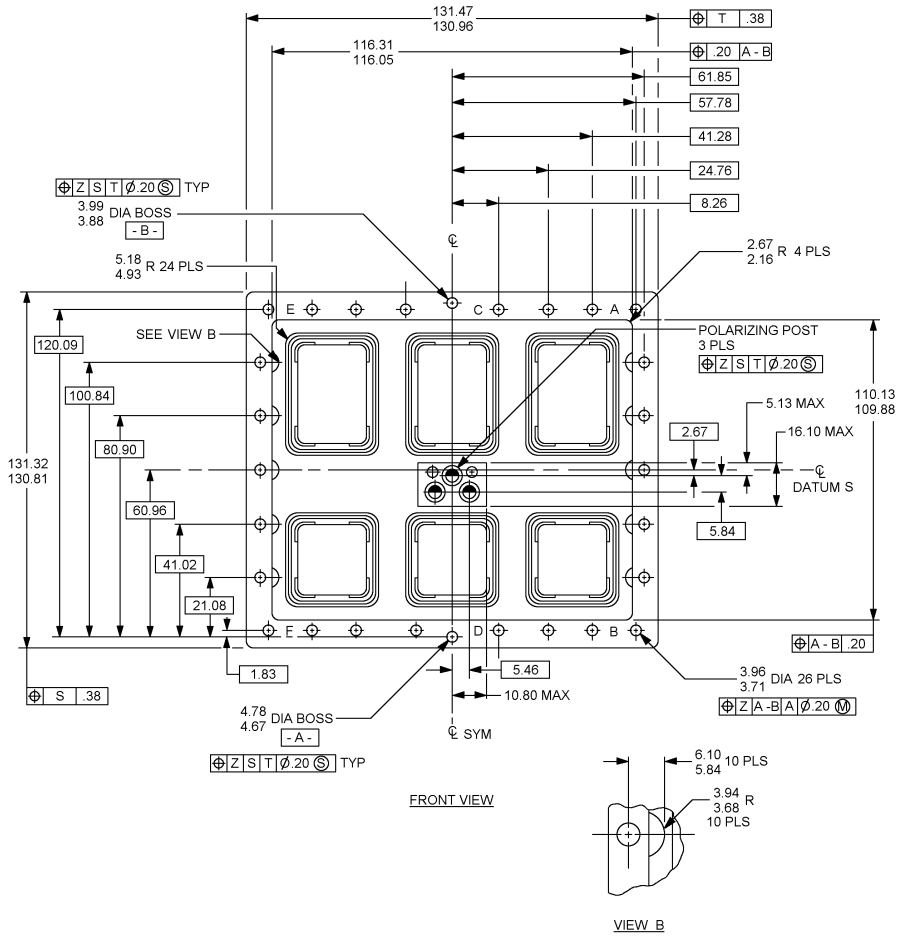


FIGURE 1. Connector, plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

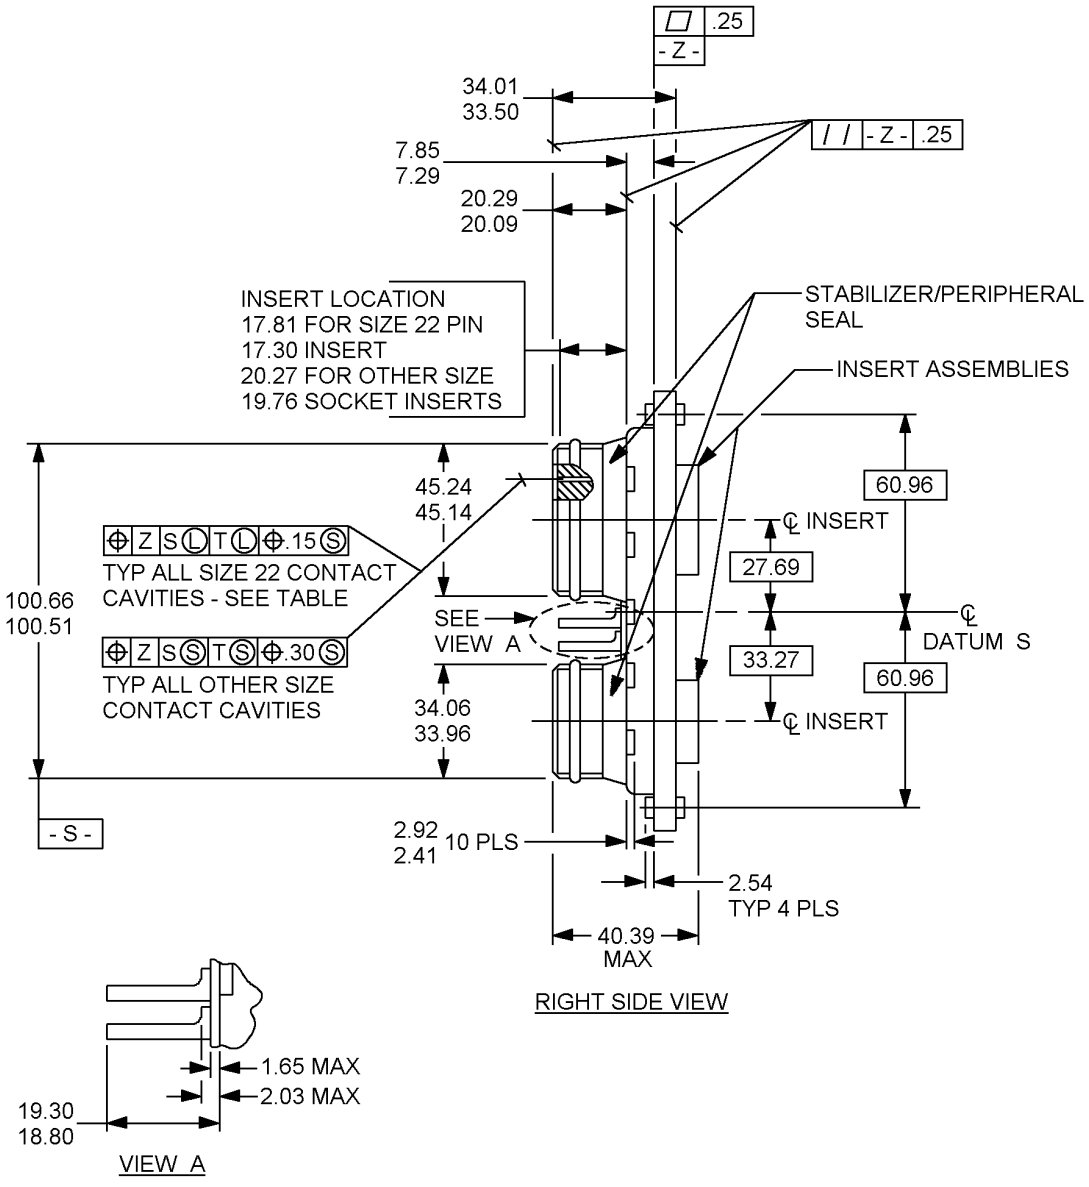


FIGURE 1. Connector, plug -Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

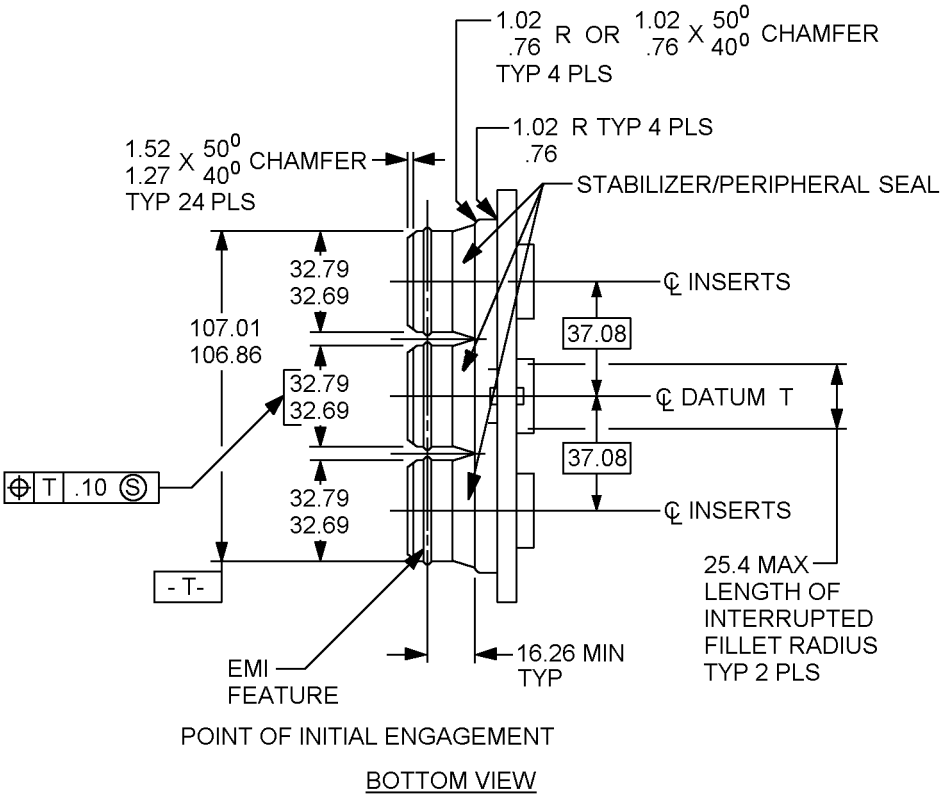


FIGURE 1. Connector, plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

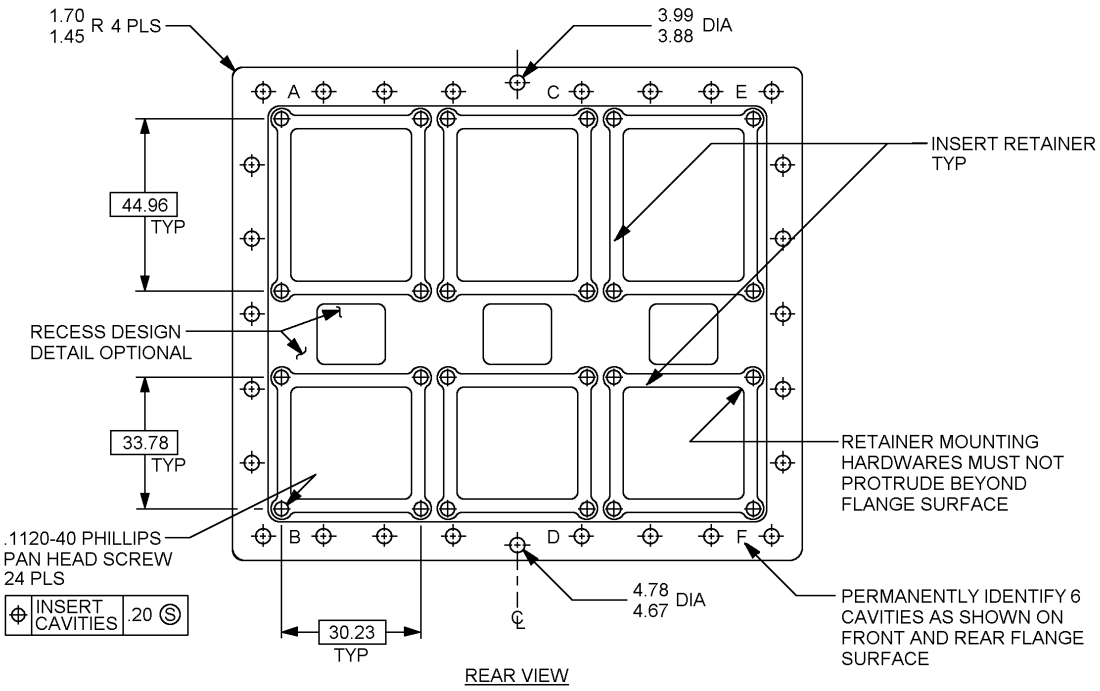


FIGURE 1. Connector, plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

Datum T	Datum S		
	100.66 (3.963)	100.64 (3.962)	100.61 (3.961)
107.01(4.213)	0.30 (.012)	0.30 (.012)	0.30 (.012)
106.99 (4.212)	0.30 (.012)	0.30 (.012)	0.30 (.012)
106.96 (4.211)	0.30 (.012)	0.30 (.012)	0.30 (.012)
106.93 (4.210)	0.28 (.011)	0.28 (.011)	0.28 (.010)
106.91 (4.209)	0.25 (.010)	0.25 (.010)	0.25 (.010)
106.88 (4.208)	0.23 (.009)	0.23 (.009)	0.23 (.009)
106.86 (4.207)	0.20 (.008)	0.20 (.008)	0.20 (.008)
Datum S			
100.58 (3.960)	100.56 (3.959)	100.53 (3.958)	100.51 (3.957)
0.28 (.011)	0.25 (.010)	0.23 (.009)	0.20 (.008)
0.28 (.011)	0.25 (.010)	0.23 (.009)	0.20 (.008)
0.28 (.011)	0.25 (.010)	0.23 (.009)	0.20 (.008)
0.25 (.010)	0.23 (.009)	0.23 (.009)	0.20 (.008)
0.23 (.009)	0.23 (.009)	0.20 (.008)	0.18 (.007)
0.23 (.009)	0.20 (.008)	0.18 (.007)	0.18 (.007)
0.20 (.008)	0.18 (.007)	0.18 (.007)	0.15 (.006)

mm	Inches	mm	Inches	mm	Inches	mm	Inches
0.15	.006	3.96	.156	16.67	.656	45.14	1.777
0.18	.007	3.99	.157	19.18	.755	45.24	1.781
0.20	.008	4.67	.184	20.19	.795	57.78	2.275
0.25	.010	4.70	.185	20.70	.815	60.96	2.400
0.38	.015	4.78	.188	21.08	.830	61.85	2.435
0.58	.023	4.93	.194	24.76	.975	80.90	3.185
0.76	.030	5.13	.202	27.69	1.090	100.51	3.957
1.02	.040	5.18	.204	27.74	1.092	100.66	3.963
1.45	.057	5.44	.214	28.24	1.112	100.84	3.970
1.70	.067	5.46	.215	32.64	1.285	106.86	4.207
1.78	.070	5.84	.230	32.79	1.291	106.96	4.211
1.83	.072	5.94	.234	33.27	1.310	109.88	4.326
2.03	.080	8.26	.325	33.76	1.329	110.13	4.335
2.16	.085	10.80	.425	33.96	1.337	116.05	4.569
2.54	.100	12.78	.503	34.06	1.341	116.31	4.579
2.62	.103	13.28	.523	34.26	1.349	120.09	4.728
2.67	.105	13.54	.533	37.08	1.460	130.81	5.152
3.07	.121	14.04	.553	40.39	1.590	130.96	5.156
3.71	.146	16.10	.634	41.02	1.615	131.32	5.170
3.88	.153	17.91	.705	41.28	1.625	131.47	5.176
3.91	.154						

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are in parentheses.
3. Inch equivalents are given for information only.

FIGURE 1. Connector, plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS


Dimensions and configuration: Shall be in accordance with figure 1.

Contacts: See SAE AS39029/93, /94, /98.

Inserts: See DOD-STD-1842 and MIL-C-83527/7.

Mating connector: See MIL-DTL-83527/6.

Part or Identifying Number (PIN) example:

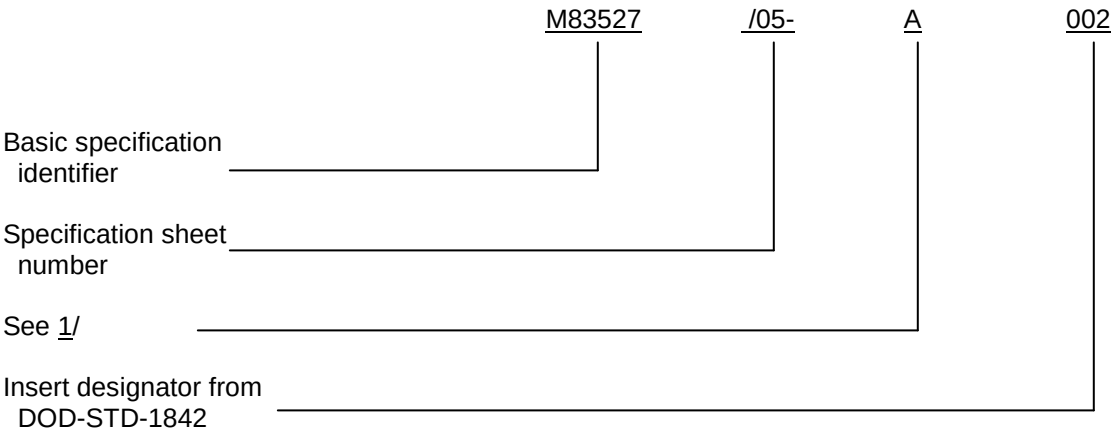

1/ "A" designator for insert with contacts, "B" designator for insert without contacts.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Reference documents. In addition to MIL-DTL-83527, this document references the following:

MIL-DTL-83527/6
MIL-C-83527/7
DOD-STD-1842
SAE AS39029/93
SAE AS39029/94
SAE AS39029/98

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force -85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2013-189)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online data at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.