
INCH-POUND
MIL-G-83528/40
2 NOVEMBER 1993
SUPERSEDING
MIL-G-83528/4C
10 July 1992

MILITARY SPECIFICATION SHEET

GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRONIC, ELASTOMER, EMI/RFI, CONNECTOR FLANGE MOUNT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-G-83528.

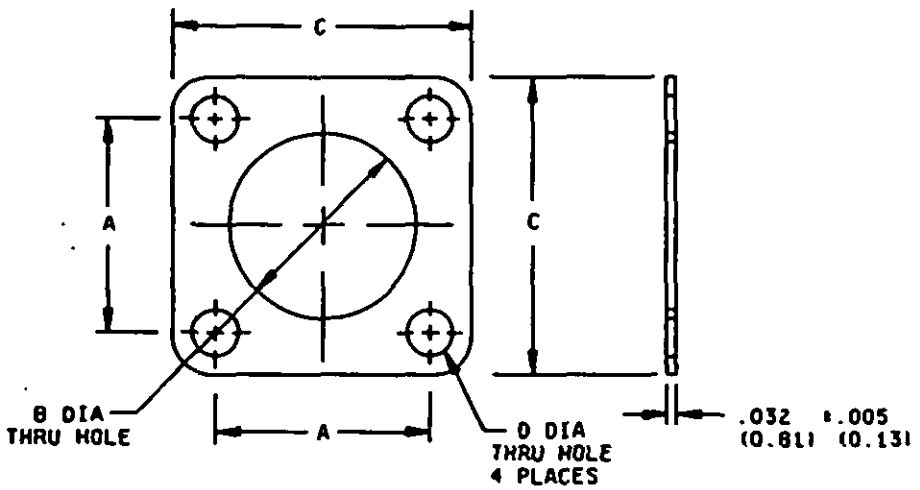

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.

FIGURE 1. EMI/RFI connector gaskets.

(D) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1 and table I.

Material: Type A, B, C, D, E, F, G, H, J, K, L, or M.

Part or Identifying Number (PIN): See table I.

Connector shell size: See tables I and II.

Supersession information: See table III.

(D) TABLE I. Dimensions.

PIN M83528/004X 1/	Dimension				Connector shell size	Cross section (cm^2) 2/
	A ±.010	B +.020 - .000	C ±.015	D ±.010		
001	.469 (11.91 mm)	.375 (9.53 mm)	.738 (18.75 mm)	.141 (3.58 mm)	6	.037
002	.594 (15.09 mm)	.630 (16.00 mm)	.840 (21.34 mm)	.135 (3.43 mm)	8	.022
003	.594 (15.09 mm)	.568 (14.43 mm)	.812 (20.62 mm)	.125 (3.18 mm)	8	.025
004	.594 (15.09 mm)	.500 (12.70 mm)	.875 (22.23 mm)	.156 (3.96 mm)	8	.039
005	.719 (18.26 mm)	.750 (19.05 mm)	.965 (24.51 mm)	.135 (3.43 mm)	9,10	.022
006	.719 (18.26 mm)	.680 (17.27 mm)	.937 (23.80 mm)	.125 (3.18 mm)	10	.027
007	.719 (18.26 mm)	.625 (15.88 mm)	1.000 (25.40 mm)	.156 (3.96 mm)	10S,SL	.039
008	.812 (20.62 mm)	.875 (22.23 mm)	1.060 (26.92 mm)	.141 (3.58 mm)	11,12	.019
009	.813 (20.65 mm)	.750 (22.10 mm)	1.094 (27.79 mm)	.141 (3.58 mm)	12,12S,SL	.036
010	.906 (23.01 mm)	1.005 (25.53 mm)	1.153 (29.29 mm)	.135 (3.43 mm)	13,14	.015
011	.906 (23.01 mm)	.938 (23.83 mm)	1.125 (28.58 mm)	.125 (3.18 mm)	14	.019
012	.906 (23.01 mm)	.875 (22.23 mm)	1.188 (30.18 mm)	.156 (3.96 mm)	14,14S	.032
013	.969 (24.61 mm)	1.135 (28.83 mm)	1.258 (31.95 mm)	.156 (3.96 mm)	15,16	.013
014	.969 (24.61 mm)	1.063 (27.00 mm)	1.250 (31.75 mm)	.125 (3.18 mm)	16	.019
015	.969 (24.61 mm)	1.000 (25.40 mm)	1.281 (32.54 mm)	.156 (3.96 mm)	16,16S	.029
016	1.062 (26.97 mm)	1.260 (32.00 mm)	1.351 (34.32 mm)	.156 (3.96 mm)	17,18	.009
017	1.062 (26.97 mm)	1.189 (30.20 mm)	1.343 (34.11 mm)	.125 (3.18 mm)	18	.016
018	1.062 (26.97 mm)	1.135 (28.83 mm)	1.375 (34.93 mm)	.156 (3.96 mm)	18,18S	.025
019	1.156 (29.36 mm)	1.375 (34.93 mm)	1.500 (38.10 mm)	.141 (3.58 mm)	19,20	.013
020	1.156 (29.36 mm)	1.312 (33.32 mm)	1.467 (37.26 mm)	.125 (3.18 mm)	20	.016
021	1.156 (29.36 mm)	1.250 (31.75 mm)	1.500 (38.10 mm)	.172 (4.37 mm)	20	.016
022	1.250 (31.75 mm)	1.500 (38.10 mm)	1.625 (41.28 mm)	.141 (3.58 mm)	21,22	.026
023	1.250 (31.75 mm)	1.437 (36.50 mm)	1.562 (39.67 mm)	.125 (3.18 mm)	22	.013
024	1.250 (31.75 mm)	1.375 (34.93 mm)	1.625 (41.28 mm)	.172 (4.37 mm)	22	.013
025	1.375 (34.93 mm)	1.625 (41.28 mm)	1.750 (44.45 mm)	.172 (4.37 mm)	23,24	.026
026	1.375 (34.93 mm)	1.563 (39.70 mm)	1.703 (43.26 mm)	.152 (3.86 mm)	24	.013
027	1.375 (34.93 mm)	1.500 (38.10 mm)	1.750 (44.45 mm)	.203 (5.16 mm)	24	.015
028	1.500 (38.10 mm)	1.750 (44.45 mm)	1.875 (47.63 mm)	.172 (4.37 mm)	25	.016
029	1.562 (39.67 mm)	1.750 (44.45 mm)	2.000 (50.80 mm)	.203 (5.16 mm)	28	.013
030	1.750 (44.45 mm)	2.000 (50.80 mm)	2.250 (57.15 mm)	.219 (5.56 mm)	32	.026
031	1.938 (49.23 mm)	2.250 (57.15 mm)	2.500 (63.50 mm)	.219 (5.56 mm)	36	.026
032	2.188 (55.58 mm)	2.500 (63.50 mm)	2.750 (69.85 mm)	.219 (5.56 mm)	40	.026
033	2.375 (60.33 mm)	2.781 (70.63 mm)	3.000 (76.20 mm)	.219 (5.56 mm)	44	.023
034	2.625 (66.68 mm)	3.031 (76.99 mm)	3.250 (82.55 mm)	.219 (5.56 mm)	48	.023
035	.500 (12.70 mm)	.437 (11.10 mm)	.800 (20.32 mm)	.135 (3.43 mm)	3/	.037
036	.500 (12.70 mm)	.437 (11.10 mm)	.687 (17.45 mm)	.135 (3.43 mm)	3/	.026

1/ "X" in the PIN shall be replaced by a material letter. Complete PIN example: M83528/004A001.
2/ For calculation of volume resistivity (for reference only).
3/ Connector shell size data unavailable for -035 and -036.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

(D) TABLE II. Connector shell size.

PIN M83528 /004X	MIL-C-38999 Series I	MIL-C-38999 Series II	MIL-C-38999 Series IV	MIL-C-81511	MS90484	MIL-C-5015	MIL-C-83723	NAS 1599 (inactive 6/80)	MIL-C-26482
001							6	6	6
002		8							
003				8	8				
004						8	8	8	8
005	9	10							
006				10	10				
007						10	10	10	10
008	11	12	11						
009						12	12	12	12
010	13	14	13						
011				14	14				
012						14	14	14	14
013	15	16	15						
014				16	16				
015						16	16	16	16
016	17	18	17						
017				18	18				
018						18	18	18	18
019	19	20	19						
020				20	20				
021						20	20	20	20
022	21	22	21						
023				22	22				
024						22	22	22	22
025	23	24	23						

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

(D) TABLE II. Connector shell size - Continued.

PIN M83528 /004X	MIL-C-38999			MIL-C-81511	MS90484	MIL-C-5015	MIL-C-83723	NAS 1599 (inactive 6/80)	MIL-C-26482
	Series I	Series II	Series IV						
026				24	24				
027						24	24	24	24
028	25		25						
029						28			
030						32			
031						36			
032						40			
033						44			
034						48			
035 1/									
036 1/									

1/ Connector shell size data unavailable for -035 and -036.

(D) TABLE III. Supersession information.

PIN 1/ M83528/004X	Superseded DESC drawing PIN 85099X 1/	PIN 1/ M83528/004X	Superseded DESC drawing PIN 85099X 1/
001	001	019	019
002	002	020	020
003	003	021	021
004	004	022	022
005	005	023	023
006	006	024	024
007	007	025	025
008	008	026	026
009	009	027	027
010	010	028	028
011	011	029	029
012	012	030	030
013	013	031	031
014	014	032	032
015	015	033	033
016	016	034	034
017	017	035	N/A
018	018	036	N/A

1/ "X" in the PIN indicates the material type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 19, 99
NSA - NS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5999-0312)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:40Z
Check the source to verify that this is the current version before use.