MILITARY SPECIFICATION SHEET

CONNECTORS AND ACCESSORIES ELECTRICAL CIRCULAR UMBILICAL BUSHING CABLE LAUNCHER RECEPTACLE FOR MIL-STD-1760 APPLICATIONS (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-83538

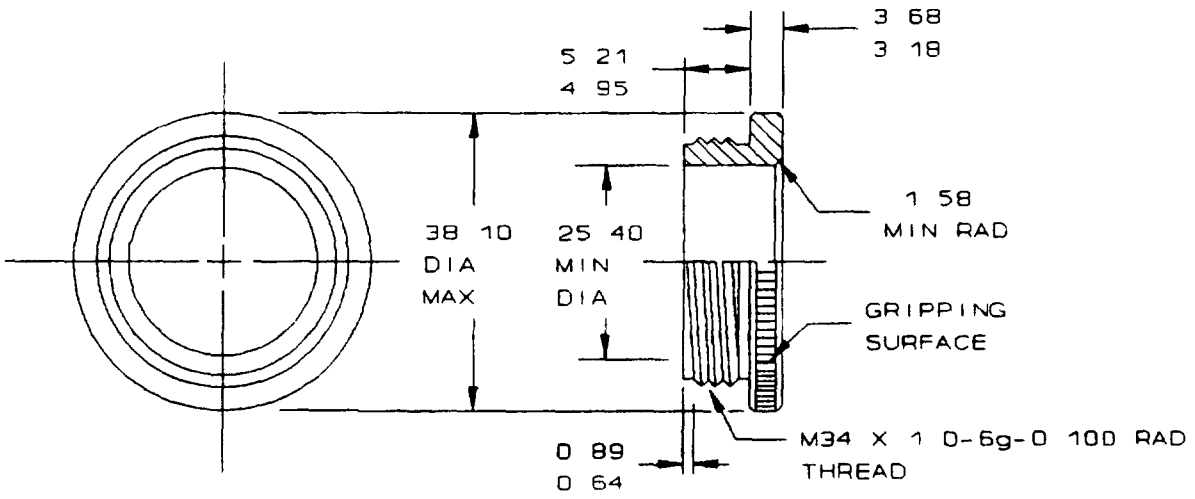

mm	Inches	mm	Inches	mm	Inches
0 64	025	3 18	125	25 40	1 000
0 89	035	3 68	145	38 10	1 500
0 100	0039	4 95	195		
1 58	062	5 21	205		

NOTES
1 Dimensions are in millimeters
2 Inch-pound equivalents are given for information only

FIGURE 1 Cable bushing launcher receptacle

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1

This cable bushing is used with MIL-C-83538/4

Class T Corrosion resistant high performance resins with or without filler materials capable of withstanding 200°C minimum The resins must be defined by specifications listed in the DODISS or published by professional materials associations Exceptions may be granted by the preparing activity

Part or Identifying Number (PIN) example

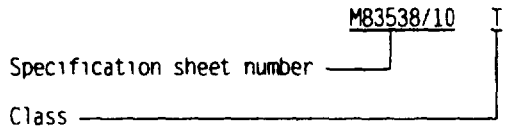

QUALIFICATION

Examination of product

Salt spray (corrosion)

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - AR MI
Navy - EC MC, OS
Air Force - 11 15 17 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5935-3901-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:11Z
Check the source to verify that this is the current version before use.