METRIC

MIL-DTL-83538/10A
24 December 1998
SUPERSEDING
MIL-C-83538/10
14 November 1994

DETAIL SPECIFICATION SHEET

CONNECTORS AND ACCESSORIES, ELECTRICAL, CIRCULAR, UMBILICAL, BUSHING, CABLE, LAUNCHER RECEPTACLE FOR MIL-STD-1760 APPLICATIONS (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-83538.

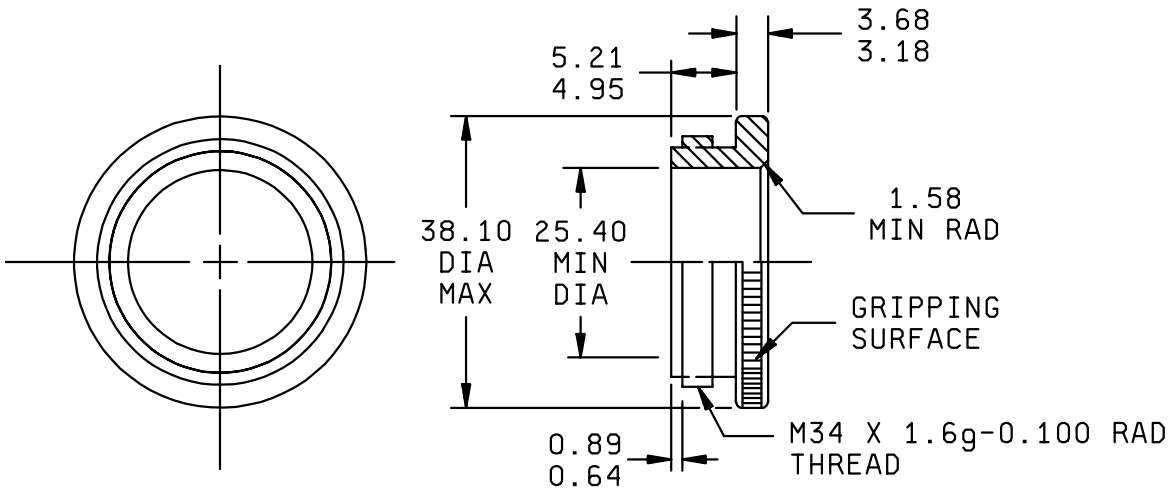

mm	Inches	mm	Inches	mm	Inches
0.64	0.025	3.18	0.125	25.4	1.000
0.89	0.035	3.68	0.145	38.10	1.500
0.100	0.004	4.95	0.195		
1.58	0.062	5.21	0.205		

NOTES:
1. Dimensions are in millimeters.
2. Inch-pound equivalents are given for information only.

FIGURE 1. Cable bushing launcher receptacle.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

This cable bushing is used with MIL-DTL-83538/4.

Material: Corrosion resistant, high performance resins, with or without filler materials, capable of withstanding 175°C minimum. The resins must be defined by specifications listed in the DODISS or published by professional materials associations. Exceptions may be granted by the preparing activity.

Part or Identifying Number (PIN) example: M83538/10.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 17, 19, 99

Preparing activity:
DLA - CC

(Project 5935-4112-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.