DETAIL SPECIFICATION SHEET

CONNECTORS AND ACCESSORIES, ELECTRICAL, CIRCULAR, UMBILICAL, ADAPTER, BUFFER PLUG, NON-REMOVABLE PIN CONTACTS, FOR MIL-STD-1760 APPLICATIONS (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-83538.


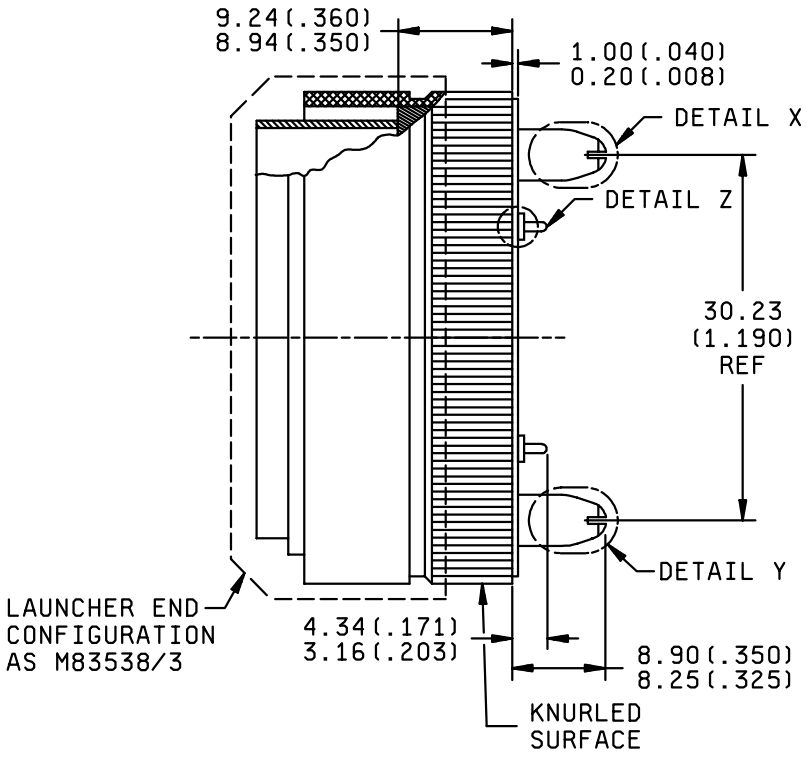


FIGURE 1. Buffer adapter plug.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:11Z
Check the source to verify that this is the current version before use.

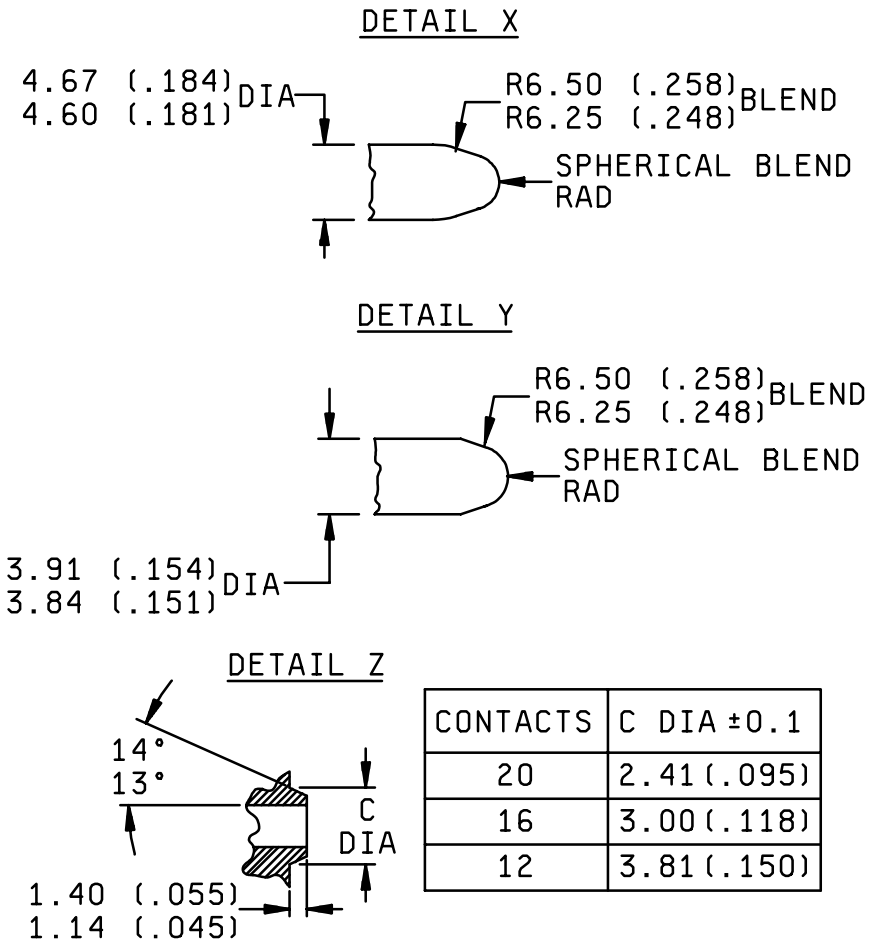

CONTACTS	C DIA ±0.1
20	2.41 (.095)
16	3.00 (.118)
12	3.81 (.150)

FIGURE 1. Buffer adapter plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:11Z
Check the source to verify that this is the current version before use.

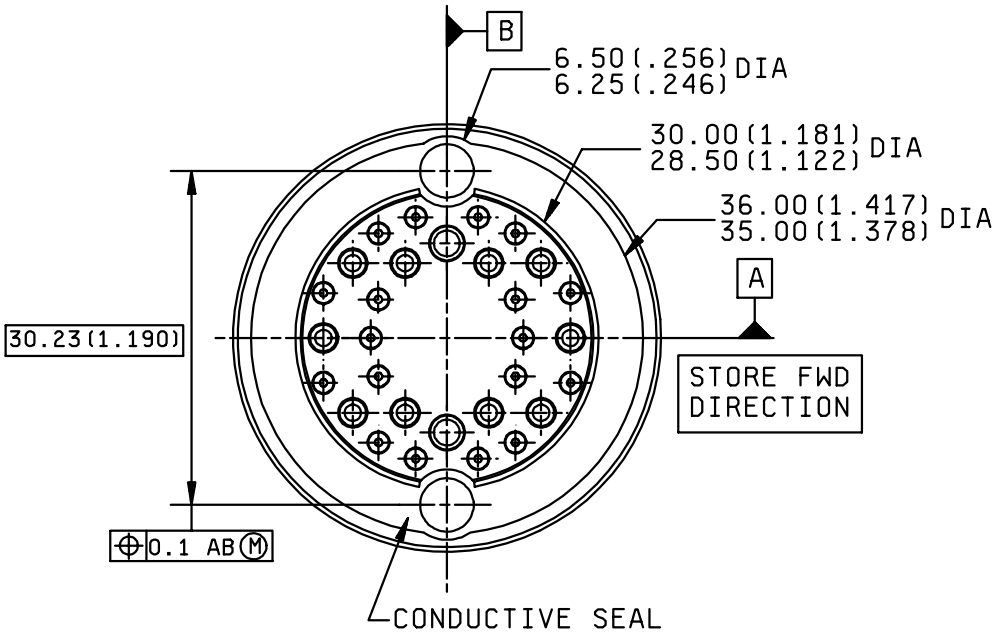


mm	Inches	mm	Inches	mm	Inches	mm	Inches
.2	0.008	3.81	0.150	5.16	0.203	9.24	0.360
1.00	0.040	3.84	0.151	6.25	0.248	28.50	1.122
1.14	0.045	3.91	0.154	6.50	0.258	30.00	1.181
1.40	0.055	4.34	0.171	8.25	0.325	30.22	1.190
2.41	0.095	4.60	0.181	8.90	0.350	35.00	1.378
3.00	0.118	4.67	0.184	8.94	0.352	36.00	1.417

NOTES:
1. Dimensions are in millimeters.
2. Inch-pound equivalents are given for information only.

FIGURE 1. Buffer adapter plug. - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:11Z
Check the source to verify that this is the current version before use.

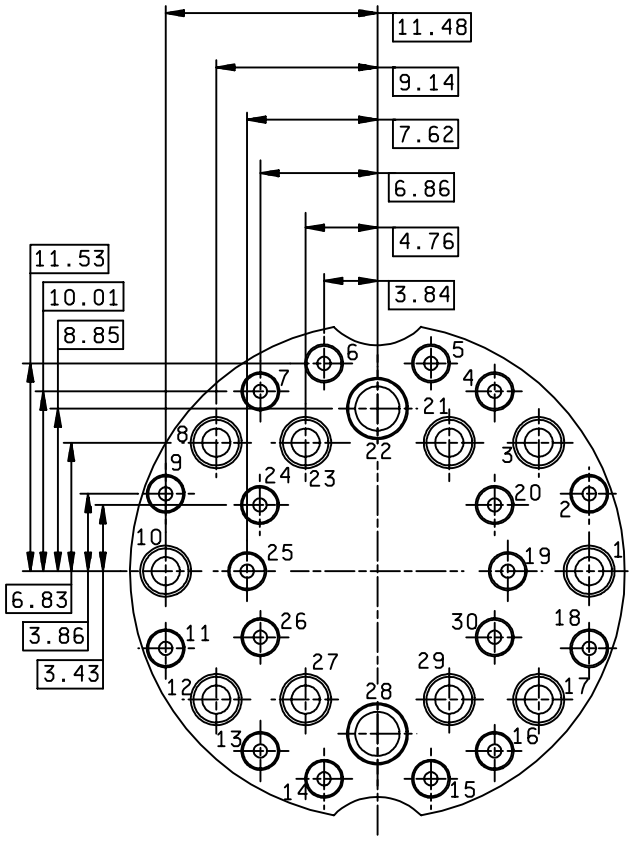

mm	Inches	mm	Inches	mm	Inches
3.43	0.135	6.83	0.269	9.14	0.360
3.84	0.151	6.86	0.270	10.01	0.394
3.86	0.152	7.62	0.300	11.48	0.452
4.76	0.187	8.85	0.348	11.53	0.454

NOTES:
1. Dimensions are in millimeters.
2. Inch-pound equivalents are given for information only.
3. Hole positions are symmetrical about central axes.

FIGURE 2. Contact arrangement - store interface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:11Z
Check the source to verify that this is the current version before use.

TABLE I. Pin connection details.

Pinout for connection to missile receptacle	MIL-STD-1760 pinout for connection to launcher receptacle
1	Y
2	H (CTR)
3	U
4	R
5	N
6	1
8	P
9	L
10	M
11	X
12	J
13	G
14	6
15	S
16	B
17	E
18	K (CTR)
19	H & K (OUTER)
20	H (INTERMEDIATE)
21	C
23	T
24	7
25	4
26	V
27	Z
29	D
30	K (NTERMEDIATE)

NOTES:
1. Unused cavities shall be sealed. See MIL-STD-1760.
2. Cavities U and Y, for the end mating with the launcher receptacle, shall utilize size 16 power contacts in this application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:11Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Dimensions and configurations: See figures 1and 2 and table I.

This connector mates with MIL-DTL-83538/4 and AIM-120 missile receptacle.

For insert arrangement: See figure 2 and MIL-STD-1560 (25-20).

Part or Identifying Number (PIN) example:

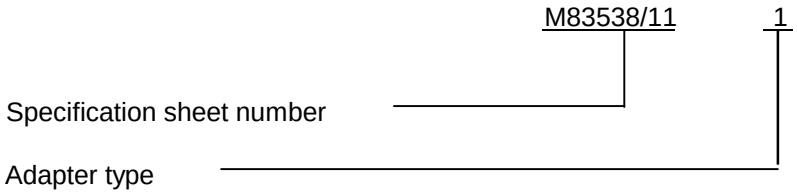

Qualification: Connectors shall meet the qualification requirements of MIL-DTL-83538 with the following exceptions and additions:

Group 1 tests: Omit maintenance aging
Shell to shell conductivity test shall permit a resistance of 5 mΩ across the buffer adapter/store receptacle interface.

Group 2 tests: Omit gauge retention
Omit gauge location
Omit contact retention
Omit accessory thread strength
Shell to shell conductivity test shall permit a resistance of 5 mΩ across the buffer adapter/store receptacle interface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:11Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 17, 19, 99

Preparing activity:
DLA - CC

(Project 5935-4112-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:11Z
Check the source to verify that this is the current version before use.