METRIC

MIL-DTL-83538/13
13 May 2005

DETAIL SPECIFICATION SHEET

CONNECTORS AND ACCESSORIES, ELECTRICAL, CIRCULAR, UMBILICAL,
TEST PLUG, REMOVABLE CRIMP CONTACTS, PINS,
FOR MIL-STD-1760 APPLICATIONS (METRIC)

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification sheet and MIL-DTL-83538.

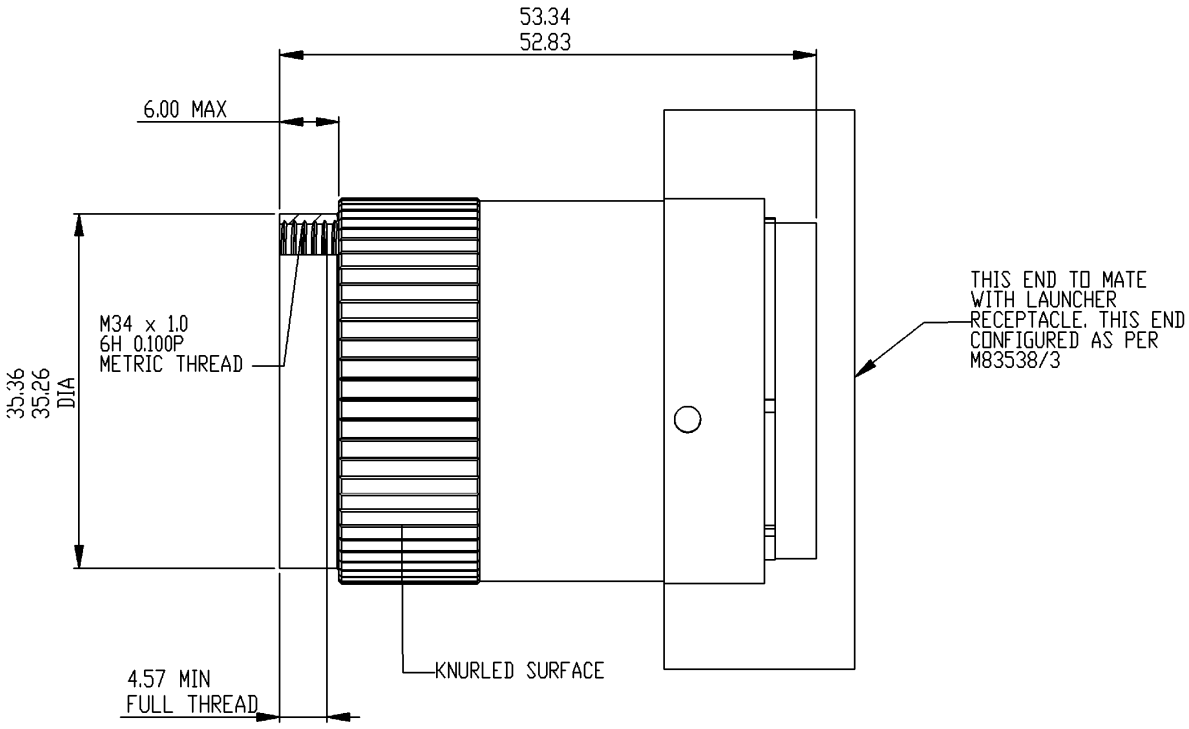

FIGURE 1. Test plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:11Z
Check the source to verify that this is the current version before use.

mm	Inches
0.10	0.004
1.00	0.044
4.57	0.180
6.00	0.236
35.26	1.388
35.36	1.392
52.83	2.080
53.34	2.100

NOTES:
1. Dimensions are in millimeters.
2. Inch-pound equivalents are given for information only.

FIGURE 1. Test plug - Continued.

REQUIREMENTS

Dimensions and configurations: See figure 1.
This connector mates with MIL-DTL-83538/4.
Insert arrangement shall be in accordance with MIL-STD-1560 (25-20).
Part or Identifying Number (PIN) example: M83538/13-1.

Referenced documents. In addition to MIL-DTL-83538, this document references the following:

MIL-DTL-83538/4
MIL-STD-1560

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 11
DLA – CC

Review activities:
Army – AR, MI
Navy – EC, MC, OS
Air Force – 19, 99

Preparing activity:
DLA – CC

(Project 5935–4644–006)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change. You should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:11Z
Check the source to verify that this is the current version before use.