METRIC

MIL-DTL-83538/3A
24 December 1998
SUPERSEDING
MIL-C-83538/3
14 November 1994

DETAIL SPECIFICATION SHEET

CONNECTORS AND ACCESSORIES, ELECTRICAL, CIRCULAR, UMBILICAL, ADAPTER, BUFFER PLUG, NONREMOVABLE PIN CONTACTS, FOR MIL-STD-1760 APPLICATIONS (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification MIL-DLT-83538.

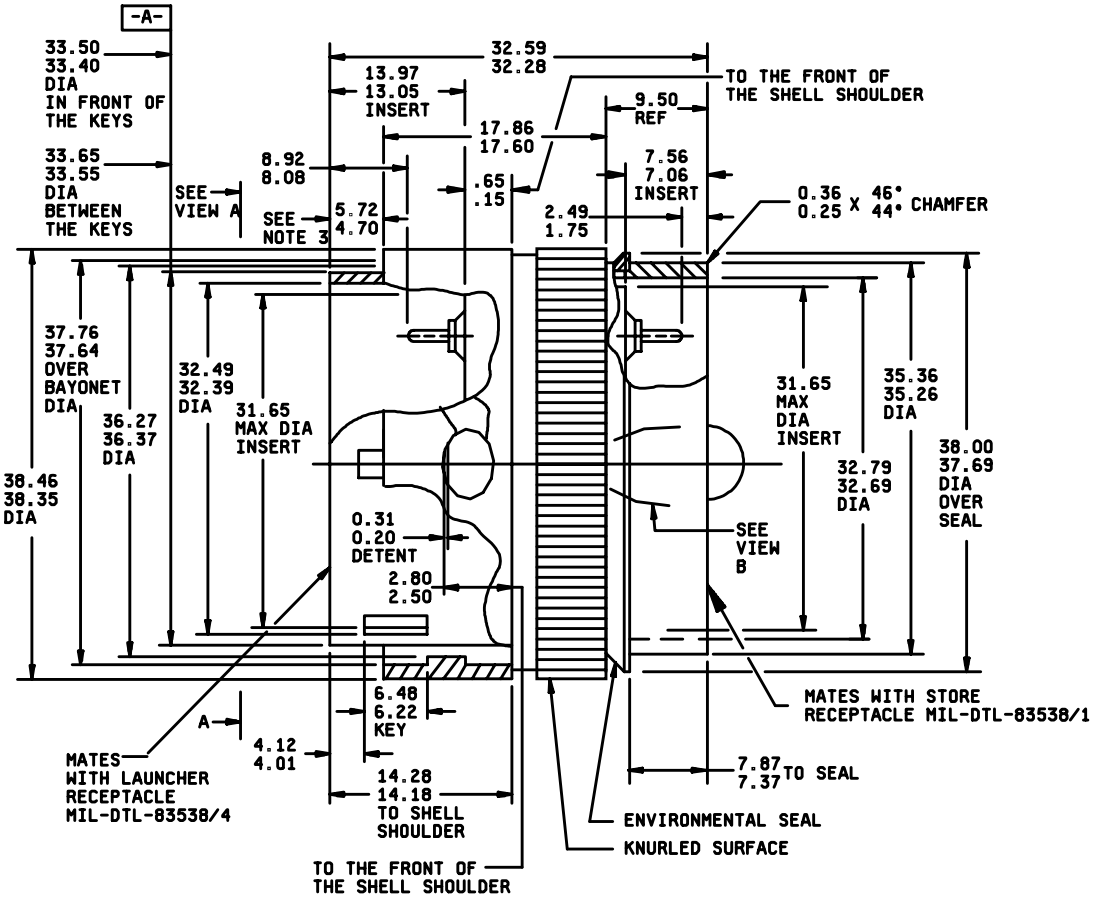


FIGURE 1. Buffer plug.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.

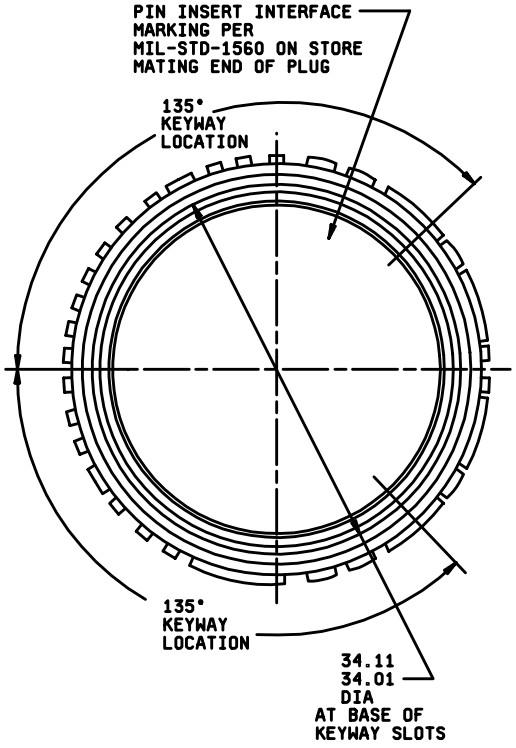
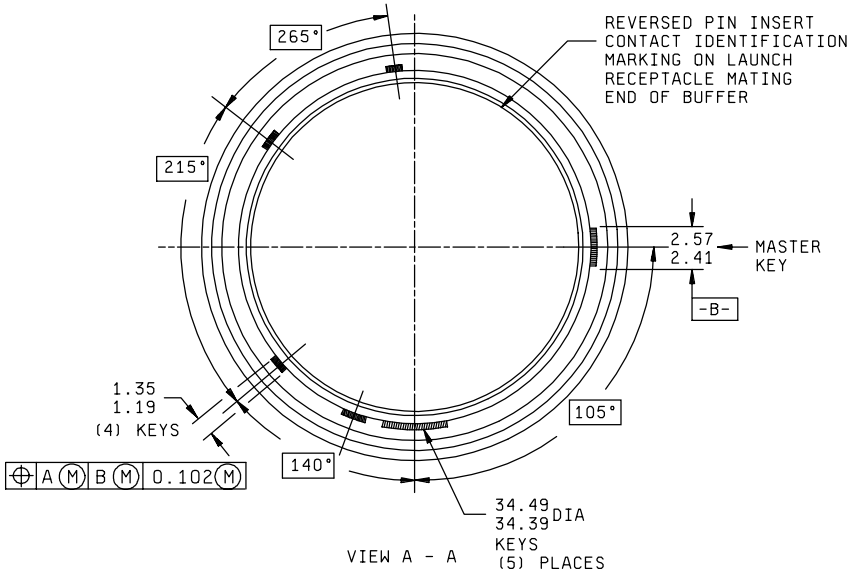


FIGURE 1. Buffer plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.



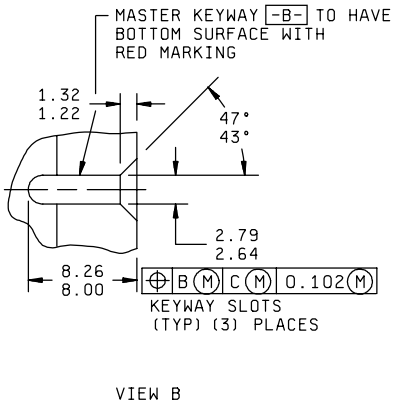


FIGURE 1. Buffer plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.

mm	Inches	mm	Inches	Mm	Inches	mm	Inches	mm	Inches
0.102	0.004	2.50	0.098	7.56	0.297	31.65	1.246	34.39	1.354
0.15	0.006	2.57	0.101	7.87	0.310	32.28	1.271	34.49	1.358
0.20	0.008	2.64	0.104	8.00	0.315	32.39	1.275	35.26	1.388
0.25	0.010	2.79	0.110	8.08	0.318	32.49	1.279	35.36	1.392
0.31	0.012	2.80	0.110	8.26	0.325	32.59	1.283	36.27	1.428
0.36	0.014	4.01	0.158	8.92	0.351	32.69	1.287	36.37	1.432
0.65	0.025	4.12	0.162	9.50	0.374	32.79	1.291	37.64	1.482
1.19	0.047	4.70	0.185	13.54	0.533	33.40	1.315	37.69	1.484
1.22	0.048	5.72	0.225	13.97	0.550	33.50	1.319	37.76	1.486
1.32	0.052	6.22	0.245	14.18	0.558	33.55	1.320	38.00	1.496
1.35	0.053	6.48	0.255	14.28	0.562	33.65	1.325	38.35	1.510
1.75	0.069	7.06	0.278	17.60	0.693	34.01	1.338	38.46	1.514
2.41	0.095	7.37	0.290	17.86	0.703	34.11	1.343		
2.49	0.098								

NOTES:
1. Dimensions are in millimeters.
2. Inch-pound equivalents are given for information only.
3. The 5.72 - 4.70 dimension is when the coupling nut is pushed towards the rear.

FIGURE 1. Buffer plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

This connector mates with MIL-DTL-83538/1, or /4, or combination of /1 and /4.

Insert arrangement shall be in accordance with MIL-STD-1560 (25-20).

Part or Identifying Number (PIN) example: M83538/3

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Preparing activity:
DLA - CC

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 17, 19, 99

(Project 5935-4112-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.