MILITARY SPECIFICATION SHEET

CONNECTORS AND ACCESSORIES, ELECTRICAL, CIRCULAR, UMBILICAL, RECEPTACLE, LAUNCHER ASSEMBLY, REMOVABLE CRIMP CONTACTS, SOCKETS FOR MIL-STD-1760 APPLICATIONS (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83538.


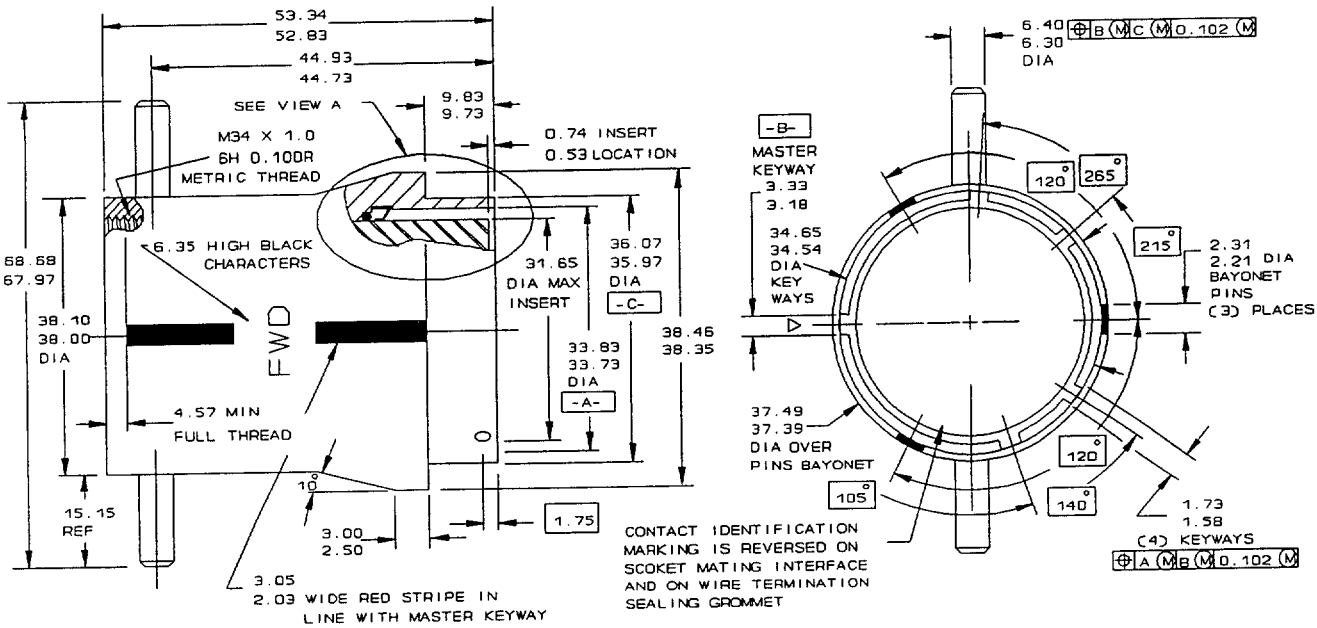


FIGURE 1. Launcher receptacle.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.

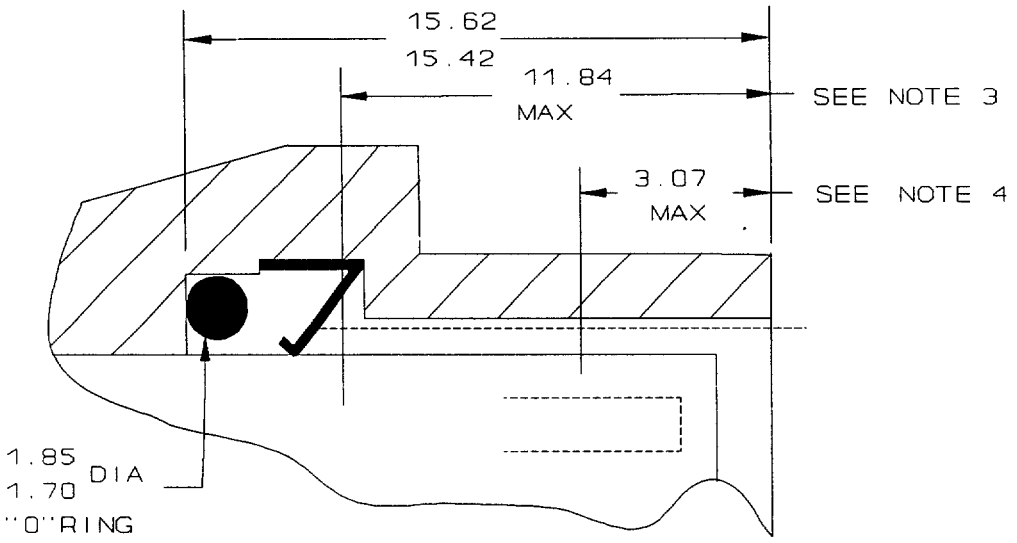

mm	Inches	mm	Inches	mm	Inches	mm	Inches
0.100	.0039	2.21	.087	15.42	.607	37.49	1.476
0.102	.0040	2.31	.090	15.62	.615	38.10	1.500
0.53	.021	3.07	.121	31.65	1.246	38.35	1.500
0.74	.029	3.18	.125	33.73	1.328	38.46	1.514
1.0	.04	3.33	.131	33.83	1.332	44.73	1.761
1.58	.062	4.57	.180	34.54	1.360	44.93	1.769
1.70	.067	6.30	.248	34.65	1.364	52.83	2.080
1.73	.068	6.40	.252	35.97	1.416	53.34	2.100
1.75	.069	9.73	.383	36.07	1.420	67.97	2.675
1.85	.073	9.83	.387	37.39	1.472	68.68	2.704
2.03	.080	11.84	.466	37.49	1.476		
3.05	.120	15.15	.596	38.00	1.496		

NOTES:
1. Dimensions are in millimeters.
2. Inch-pound equivalents are given for information only.
3. A point at which a square ended pin of the same diameter as the mating shell first touches the ground spring.
4. A point at which a gauge pin, having the same basic diameter as the mating contact and a square face, touches the socket contact spring.

FIGURE 1. Launcher receptacle - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: See figure 1.

This connector mates with MIL-C-83538/3.

For insert arrangement: See MIL-STD-1560 (25-20).

Class S - corrosion resistant steel.

Part or Identifying Number (PIN) example:

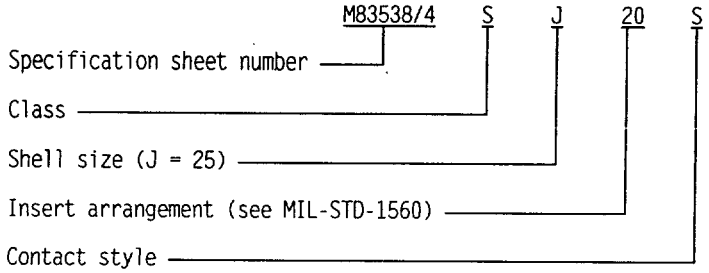

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3901-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.