
MILITARY SPECIFICATION SHEET

CONNECTORS AND ACCESSORIES, ELECTRICAL, CIRCULAR, UMBILICAL, COVER, PROTECTIVE, LAUNCHER RECEPTACLE FOR MIL-STD-1760 APPLICATIONS (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83538.

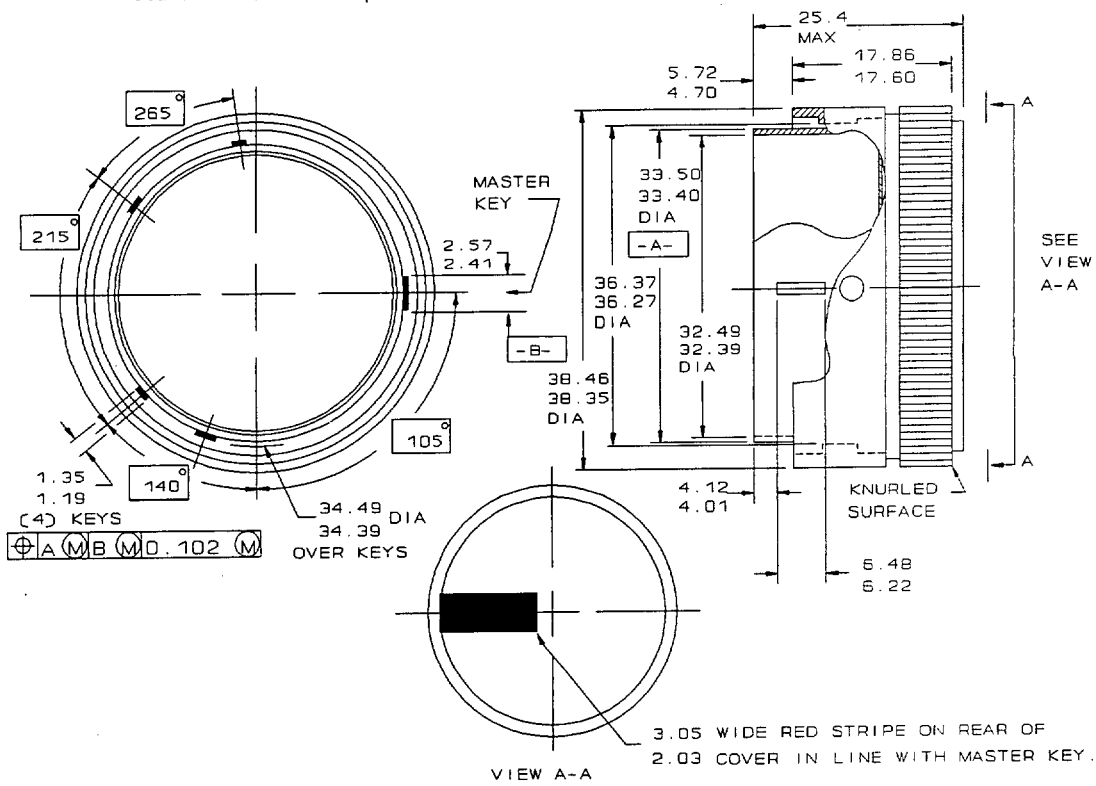

mm	Inches	mm	Inches	mm	Inches	mm	Inches
0.102	.0040	4.01	.0158	17.86	.703	34.49	1.358
1.19	.047	4.12	.162	25.4	1.00	36.27	1.428
1.35	.053	4.70	.185	32.39	1.275	36.37	1.432
2.03	.080	5.72	.225	32.49	1.279	38.35	1.510
2.41	.095	6.22	.245	33.40	1.318	38.46	1.514
2.57	.101	6.48	.255	33.50	1.319		
3.05	.120	17.60	.693	34.39	1.354		

NOTES:
1. Dimensions are in millimeters.
2. Inch-pound equivalents are given for information only.

FIGURE 1. Protective cover launcher receptacle.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Dimensions and configuration: See figure 1.

This protective store cover is used with MIL-C-83538/4.

Class S - corrosion resistant steel.

Part or Identifying Number (PIN) example:

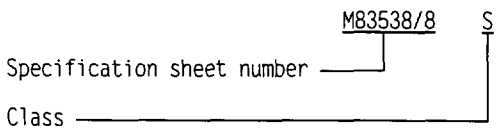

QUALIFICATION:

Examination of product.

Mating and unmating forces.

Salt spray (corrosion).

Altitude immersion.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3901-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.