MIL-B-43166B(GL)

19 May 1975

SUPERSEDING
MIL-B-43166A(GL)
10 August 1967

MILITARY SPECIFICATION

BAG, COTTON DUCK, NAIL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type and size nail bag fabricated from cotton duck with a drawcord closure.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

T-C-571	-	Cords, Cotton; General and Special Purpose, Sash and Venetian Blind.
V-T-285	-	Thread, Polyester.
UU-P-268	-	Paper, Kraft, Wrapping.
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered.
CCC-D-950	-	Dyeing and Aftertreating Processes for Cotton Cloths.
DDD-L-20	-	Label; For Clothing, Equipage and Tentage, (General Use).
PPP-B-636	-	Boxes, Shipping, Fiberboard.

MILITARY

MIL-G-16491	-	Grommet, Metallic.

FSC 8105

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:50Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams and Stitching.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

DRAWING

US ARMY NATICK DEVELOPMENT CENTER

2-3-29 - Bag, Cotton Duck, Nail.

(Figure 1 is a miniature reproduction of referenced drawing and is attached for information only.)

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

U.S. Postal Service Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:50Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Materials and components.

3.1.1 Cloth, duck, cotton. The cloth, before finishing, shall conform to type 1, No. 10 hard texture of CCC-C-419.

3.1.1.1 Color and treatment. The finished cloth shall conform to type I, class B, Olive Drab No. 7 of CCC-D-950.

* 3.1.2 Thread, polyester. The thread shall conform to type I, class 1, subclass B, size FF of V-T-285. The thread shall be dyed to match Olive Drab S-1 (CA 66022) (see 6.3).

3.1.3 Cord, cotton. The cotton cord shall conform to type I, class 3, size 4 of T-C-571.

3.1.4 Grommet. The grommets shall conform to type I, class 3, size No. 0 of MIL-G-16491.

3.2 Construction. The construction shall conform to Drawing 2-3-29 and as specified herein.

3.2.1 Stitching, machine. All machine stitching shall conform to type 301, 6 to 8 stitches per inch, of FED-STD-751.

3.2.1.1 Thread breaks. Thread breaks in stitching shall be overstitched not less than 1 inch at each break.

3.2.1.2 Stitching ends. Stitching ends shall be overstitched not less than 1 inch except where ends are turned under in a hem, or are held down by other stitching.

3.2.1.3 The addition of any lubricant to the polyester sewing thread prior to or during the sewing operation is prohibited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:50Z
Check the source to verify that this is the current version before use.

3.2.2 Setting of grommets. Holes punched to receive grommets shall be smaller than the grommet barrel so that the barrel must be forced through the hole. The grommets shall be securely clinched without cutting the materials.

3.3 Marking. All marking and labels shall conform to DDD-L-20.

3.3.1 Identification marking. The identification marking shall conform to type IV, class 5. In addition, the letters "US", and "NAILS" shall be printed or stenciled in the size characters and in the location shown on Drawing 2-3-29, and shall conform to type IV, class 9. Fastness of class 9 marking shall be as specified for class 5 labels.

3.4 Workmanship. Cloth components shall be clean and free of holes, cuts, tears or cloth defects such as multiple floats, or broken or missing yarns. Thread tension shall be maintained so that there will be no loose stitching, and seam allowances shall be maintained so that no run-offs, twists, pleats, or open seams shall result. All thread ends shall be trimmed. Care shall be taken to see that no needle chews occur. Metal components shall be free of burrs, sharp edges, or corroded areas and shall not be broken or malformed.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Quality conformance inspection. Except as otherwise specified, sampling for inspection shall be performed in accordance with provisions set forth in MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:50Z
Check the source to verify that this is the current version before use.

4.2.2 Process inspection. Inspection shall be made to determine that the following are as specified:

a. There shall be no lubrication of polyester thread prior to or during the sewing operation for compliance with 3.2.1.3.
b. Holes punched to receive grommets are in compliance with 3.2.2.

Whenever nonconformance is noted, correction shall be made to the items affected and to the process.

4.2.3 End item inspection. The inspection lot shall consist of all completely fabricated bags offered for inspection at one time. The sample unit shall be one completely fabricated bag. The inspection levels and acceptable quality levels (AQLs) shall be as specified in 4.2.3.3.

4.2.3.1 Visual inspection. The completely fabricated end item shall be examined for defects in table I.

TABLE I. Classification of defects for visual characteristics

Examine	Defect	Classification Major	Minor A	Minor B
Fabric	Cut, tear or hole:			
	-greater than 1/8 inch in length or diameter.		X	
	-greater than 3/32 inch but not greater than 1/8 inch.			X
	-more than 5 holes 3/32 inch or less.			X
	Broken or missing yarn, multiple floats clearly visible at normal inspection distance (approximately 3 feet).		X	
Cord	Any cut; any break.			X
Grommets	Malformed:			
	-fails to perform intended function.	X		
	-but will perform intended function.		X	
	Corroded area.			X
	Burr or sharp edge which may cause injury in handling or damage to fabric.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:50Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Grommets (cont'd)	Improperly set; two or more teeth exposed, clinched loosely allowing grommet to rotate in hole.			X
	Clinched excessively tight, cutting fabric.	X		
	Insecurely clinched; i.e., grommet or washer becomes disengaged.		X	
Seams and stitching	Open seam on stitch type 301: -1 inch or less.			X
	-more than 1 inch.		X	
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken, or when one or more consecutive skipped or run-off stiches occur. On double-stitched seams, a seam shall be classified as open when either one or both sides of a seam are open.			
	Raw edges caught in stitching: -more than 1 inch but not more than 3 inches.			X
	-more than 3 inches.		X	
	Thread breaks overstitched less than 1 inch.			X
	Needle chews resulting in cut, tear or hole (see cut, tear or hole).			
	One or more required rows of stitching omitted.	X		
Stitching ends	Overstitched less than 1 inch (except where ends are held down by other stitching or turned under in a hem).		X	
Seams	Seams pleated.			X
Seam type	Wrong seam type.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:50Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Stitching ends (cont'd)				
Stitch type	Wrong stitch type.	X		
Stitch tension	Loose, resulting in an exposed bobbin or top thread, for more than 2 inches.		X	
	Tight, as evidenced by puckering of fabric on seams, for more than 2 inches.		X	
Stitches per inch	Less than minimum specified:			
	-one stitch.			X
	-two or more stitches.		X	
	More than maximum specified:			
	- one stitch.			X
	-two or more stitches.	X		
	NOTE: Variation in the number of stitches per inch caused by the operator speeding up the machine and pulling the fabric in order to sew over heavy places or heavy seams or in turning corners, shall be classified as follows: a. Within the minor "B" defect classification - no defect. b. Within the minor "A" defect classification - minor "B" defect.			
Stitching gage	Not as specified.		X	
Stitching margin	Larger than specified by more than 3/16 inch:			
	-for less than 2 inches in length of seam.			X
	-for 2 inches or more in length of seam.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:50Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Components and assembly	Any component part not fabricated of applicable referenced material.		X	
Hem	Formed on wrong side of bag.		X	
	Twisted or pleated.		X	
Draw cord	Ends not overhand knotted.			X
Marking and identification	Omitted, incorrect, illegible, or misplaced.		X	
	Size of characters not as specified.			X
Cleanness	Grease or oil stains; thread ends not trimmed throughout.			X

4.2.3.2 Dimensional examination. Any dimension not within the specified tolerance will be classified as a defect.

4.2.3.3 Inspection levels and AQL's. The inspection levels and AQL's expressed in terms of defects per hundred units shall be as follows:

Examination	Inspection level	AQL's
For defects applicable to table I	II	2.5 Major 6.5 Major and minor A defects combined 15.0 Totals (major, minor A and B defects combined)
For defect applicable to 4.2.3.2	S-3	10.0 One class

* 4.2.4 Examination of preparation for delivery. An examination shall be made to determine whether the packaging, packing and marking complies with the section 5 requirements. Defects shall be scored in accordance with table II. The sample unit shall be one shipping container fully prepared

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:50Z
Check the source to verify that this is the current version before use.

for delivery with the exception that it need not be closed. Defects of closure listed in table II shall be examined on shipping containers fully prepared for delivery. The lot shall be the number of shipping containers offered for delivery at one time. The inspection level shall be S-2 and the AQL expressed in terms of defects per hundred units shall be 2.5.

TABLE II. Examination of preparation for delivery

Examine	Defect
Marking (exterior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, improper taping, or inadequate stapling. Contents not covered top and bottom with kraft paper. Bulged or distorted containers.
Contents	Number of bags per container is more or less than specified.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each bag shall be smoothly folded flat with the bottom folded partially over the bag body. Ten bags, alternately reversed, shall be stacked to form an even bundle measuring approximately 9-1/4 by 9 by 5 inches. The bundle shall be securely crosstied with cotton tape or twine.

* 5.1.2 Level C (commercial packaging). Bags shall be packaged to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the supplier for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. One hundred-eighty bags, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:50Z
Check the source to verify that this is the current version before use.

with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A packages shall be packed flat three in length, two in width, and three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 27-1/2 inches in length, 19 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of the container specification.

* 5.2.2 Level B. One hundred-eighty bags, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A packages shall be packed flat three in length, two in width, and three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 27-1/2 inches in length, 19 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

* 5.2.2.1 When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification.

5.2.3 Level C (commercial packing). Bags, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The bag covered by this specification is designed to be used for on-the-job storing of nails. It is included with numerous kits, sets and chests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:50Z
Check the source to verify that this is the current version before use.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Stock number.
(c) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Standard sample. For access to a standard shade sample of polyester thread, address the procuring office issuing the invitation for bids.

6.4 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activity:

Army - MD

Preparing activity:

Army - GL

Project No. 8105-A185

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:50Z
Check the source to verify that this is the current version before use.

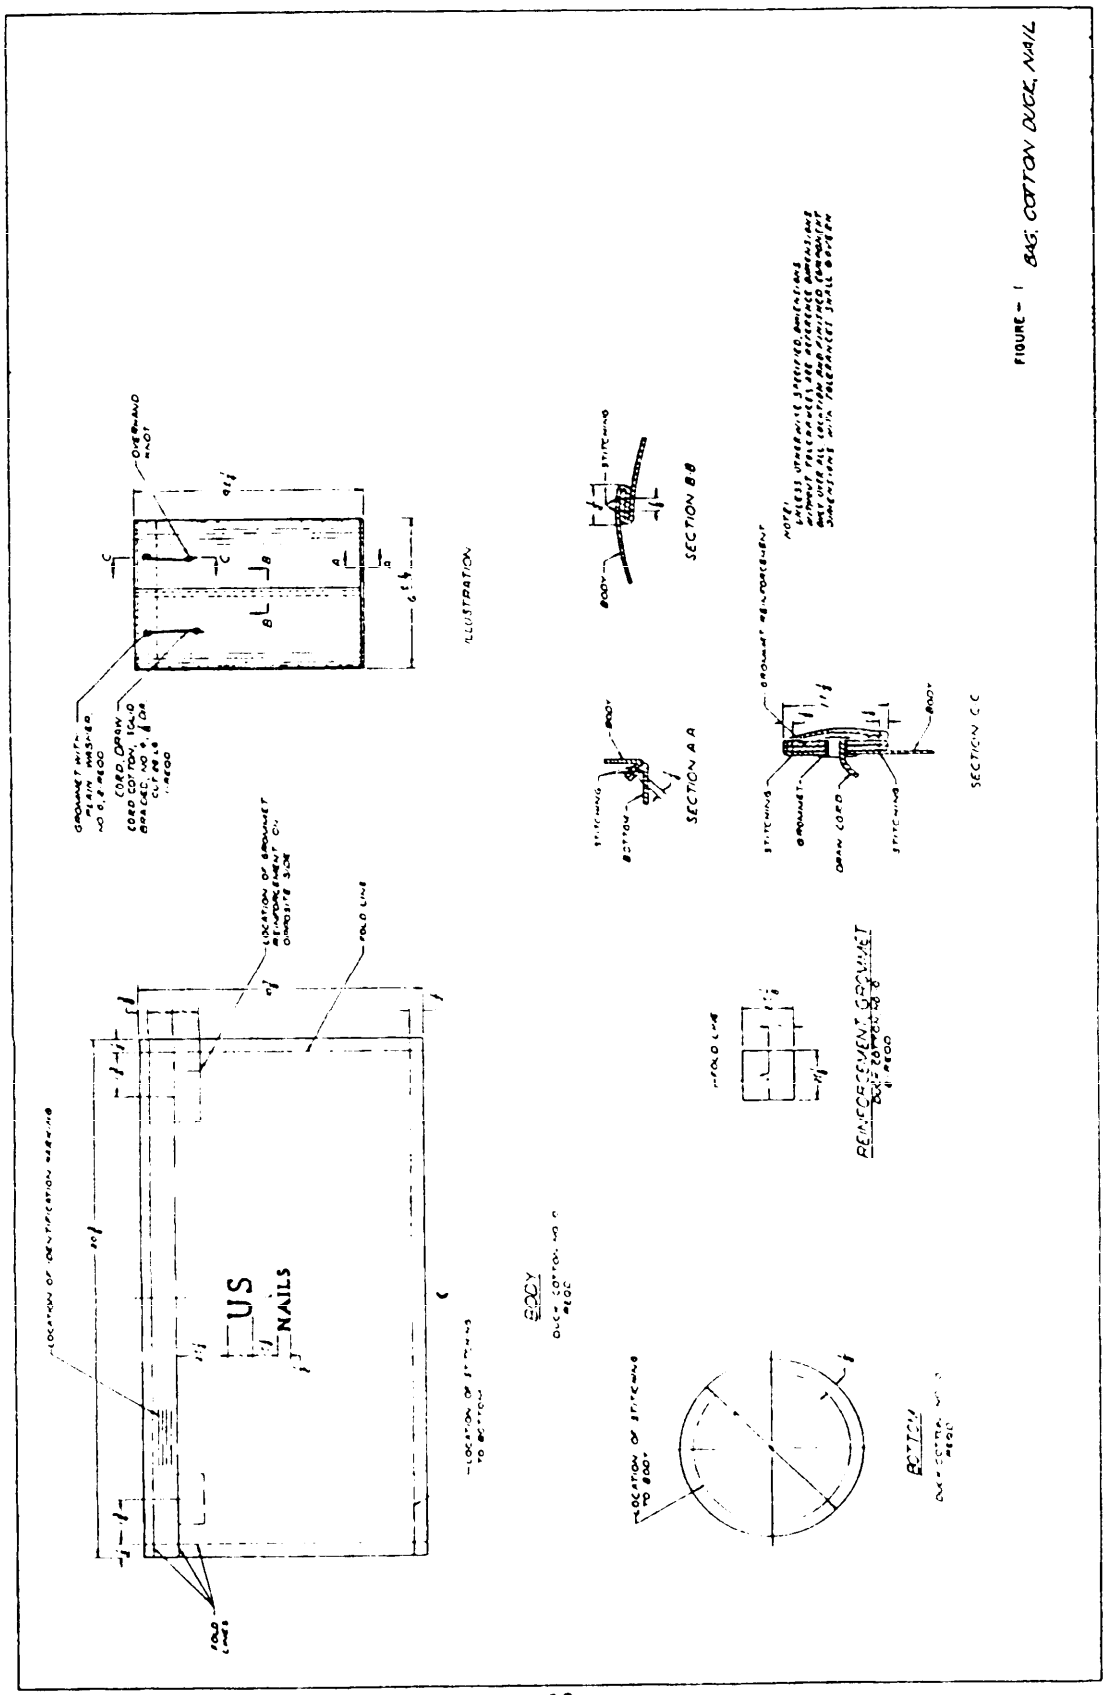


FIGURE - 1 BAG, COTTON DUCK, NAIL

Source: https://assist.dla.mil -- Downloaded: 202640-21T20:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-B-43166B(GL) - BAG, COTTON DUCK, NAIL

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:50Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

US ARMY NATICK [redacted] Development Center

NATICK, MA 01760

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE $300

AMXNM-TDG

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD - 314



Commander
US Army Natick [redacted] Development Center
ATTN: [redacted] AMXNM-TDG
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:50Z
Check the source to verify that this is the current version before use.