INCH-POUND

MIL-C-43141E(ME)
31 August 1994
SUPERSEDING
MIL-C-43141D(ME)
15 November 1978

MILITARY SPECIFICATION

CUTTERS; PAPER, GUILLOTINE: FLOOR MODEL, ELECTRIC-MOTOR-DRIVEN

This specification is approved for use within the USA Belvoir Research, Development, and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers electric-motor-driven papercutters.

1.2 Classification. Papercutters covered by this specification shall be of the following sizes, classes, and styles, as specified (see 6.2).

Size 1 - 18-1/4-inch (463.55 mm) minimum throat width.
19-3/4-inch (501.65 mm) maximum throat width.

Size 2 - 23-inch (584.2 mm) minimum throat width.
26-1/2-inch (673.1 mm) maximum throat width.

Size 3 - 30-1/2-inch (774.7 mm) minimum throat width.
45-inch (1143.0 mm) maximum throat width.

Size 4 - 46-1\2-inch (1181.1 mm) minimum throat width.
57-inch (1447.8 mm) maximum throat width.

Size 5 - 58-inch (1473.2 mm) minimum throat width.
64-inch (1625.6 mm) maximum throat width.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US ARMY BELVOIR RDE CTR, ATTN SATBE TSE, 20101 GRIDLEY RD STE 104, FT BELVOIR VA 22060-5818 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3610

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:46Z
Check the source to verify that this is the current version before use.

Size 6 - 65-inch (1651.0 mm) minimum throat width.
89-inch (2260.6 mm) maximum throat width.

Size 7 - 90-inch (2286.0 mm) minimum throat width.
Ill-inch (2819.4 mm) maximum throat width.

Class A - 115-volt power requirement.
Class B - 208-volt power requirement.
Class C - 220-volt power requirement.

Style 1 - 50-cycle power requirement.
Style 2 - 60-cycle power requirement.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specification, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-V-173	- Varnish, Moisture-and-Fungus Resistant (For Treatment of Communications, Electronic, and Associated Equipment) .
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- 'Treatment and Painting of Materiel.
MIL-G-3859	- Grease Guns, Hand-operated, Lever, push and Screw Type.
MIL-S-15769	- Straightedges, Steel Machinists' and Toolmakers'.
MIL-C-46168	- Coating, Aliphatic Polyurethane, Chemical Agent Resistant.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-838	- Lubrication of Military Equipment.
MIL-STD-889	- Dissimilar Metals.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:46Z
Check the source to verify that this is the current version before use.

MIL-STD-1472 - Human Engineering Design Criteria for Military Systems, Equipment and Facilities.

MIL-STD-1474 - Noise Limits for Army Materiel.

MS15003 - Fittings, Lubrication (Hydraulic) Surface Check, 1/8 Pipe Threads, Type III.

HANDBOOKS

MILITARY

MIL-HDBK-113 - Guide for the Selection of Lubricants, Functional Fluids, Preservatives and Specialty Products for Use in Ground Equipment Systems.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from: STDZN DCMNT ORDER DESK, BLDG 4D, 700 ROBBINS AVE, PHILADELPHIA PA 19111-5094.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the non-Government documents which is current on the date of the solicitation.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/SAE J429 - Mechanical and Material Requirement for Externally Threaded Fasteners.

(Application for copies should be addressed to: AMERCN NATL STANDS INST, 1430 BROADWAY, NEW YORK NY 10018.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging.

(Application for copies should be addressed to: AMERCN SCTY FOR TEST & MTRLS, 1916 RACE STRET, PHILADELPHIA PA 19103.)

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

Standard MG-1-Motors and Generators.

(Application for copies should be addressed to: NATL ELECTRL MFGRS ASS, 2101 L STRET NW, WASHINGTON DC 20037.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:46Z
Check the source to verify that this is the current version before use.

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

No. 70 - National Electrical Code.

(Application for copies should be addressed to: NATL FIRE PROTECT ASS, BATTERYMARCH PARK, QUINCY MA 02269.)

SOUTH COAST AIR QUALITY MANAGEMENT CONTROL DISTRICT

Rule 442 - Usage of Solvents.

(Application for copies should be addressed to: S MGMT CNTRL DIST, 9150 E FLAIR DR, EL MONTE CA 91731.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The papercutters shall be motor driven and shall consist of a base and frame, table (air-cushion 45-inch (1143 mm) and larger models), knife, knife-bar cutting stick paper clamp, back and side gauges, safety guards, and a hydraulic system.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3). Any changes or deviations of the cutter from the approved first article during production will be subject to the approval of the contracting officer. Approval of the first article will not relieve the contractor of the obligation to furnish cutters conforming to this specification.

3.3 Material. Material shall be as specified herein. Material not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 4.1.2).

3.3.1 Material deterioration prevention and control. The cutter shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the cutter may be exposed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

3.3.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.2 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces, and parts incorporated in the papercutter may be newly fabricated from recovered materials to the maximum extent practicable, provided the cutter produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces, and parts shall not be incorporated in the cutter.

3.4 Design.

3.4.1 Capabilities and dimensions. Capacities, dimensions, and weights of the cutters shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

TABLE I. Capabilities, dimensions, and weights.

Capacity, dimension, and weight:	Size						
	1	2	3	4	5	6	7
Throad width Minimum (inches) (mm) Maximum (inches) (mm)	18-1/4 463.55 19-3/4 501.65	23 584.2 26-1/2 673.1	30-1/2 774.7 45 1143.0	46-1/2 1181.1 57 1447.8	58 1473.2 64 1625.6	65 1651.0 89 2260.6	90 2286.0 111 2819.4
Clearance under clamp (pile height): Maximum (inches) (mm)	2-1/2 63.5	3-1/2 88.9	5-1/2 139/7	7 177.8	7 177.8	7 177.8	8 203.2
Back guage from knife (limits of range): Far limit not less than (inch) (mm)	18-1/4 463.55	23 584.2	30-1/2 774.7	46-1/2 1181.1	58 1473.2	65 1651.0	90 2286.0
Near limit not more than (inch) (mm)	1/2 12.7	3/4 19.05	3/4 19.05	3/4 19.05	3/4 19.05	3/4 19.05	1 25.4
Back gauge indication band graduations: (inch) (mm)	1/16 1.588	1/16 1.588	1/16 1.588	1/16 1.588	1/16 1.588	1/16 1.588	1/16 1.588
Front of table to knife: Minimum (inches) (mm) Maximum (inches) (mm)	12-1/4 311.15 12-1/2 317.5	18-1/2 469.9 18-3/4 476.25	18 457.2 20 508.0	21 533.4 25 635.0	19 482.6 25 635.0	21 533.4 29 736.6	25 635.0 30 762.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

Capacity, dimension, and weight:	Size						
	1	2	3	4	5	6	7
Table indication rule graduations (inch) (mm)	- -	1/16 1.588	1/16 1.588	1/16 1.588	1/16 1.588	1/16 1.588	1/16 1.588
Height of tabletop: Minimum (inches) (mm) Maximum (inches) (mm)	34 863.6 34-1/2 876.3	34 863.6 36 914.4	34 863.6 37-1/2 952.5	37-1/2 952.5 39 990.6	37 939.8 40 1016.0	37 939.8 40 1016.0	37 939.8 40 1016.0
Floor space: Width maximum (inches) (mm)	35 889.0	59 1498.6	123 3124.2	136 3454.4	141 3581.4	147 3733.8	173 4394.2
Depth maximum (inches) (mm)	45 1143.0	63 1600.2	98 2489.2	122 3098.8	128 3251.2	150 3810.0	173 4394.2
Weight, maximum (pounds) (kilograms)	905 410.5	2,000 907.18	10,000 4535.9	10,000 4535.9	14,000 6350.3	15,000 6803.9	22,000 9979.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

3.5 Construction.

3.5.1 Base and frame. The base and frame shall be sturdily constructed to assure a rigid and firm structure for the operating parts of the machine.

3.5.2 Table. The table shall have a top surface lying in a plane with an overall variation of not more than ± 0.005 inch, and variation in any 12-inch (304.8 mm) distance shall be not more than ± 0.003 inch. The table surface in front of the knife shall be provided with indication rule graduations. A recess shall be provided for holding the cutting stick (see 3.5.5) and shall extend over the full width of the table beneath the knife edge. The recess shall be slightly off center from the cutting edge of the knife to provide cutting surfaces through rotation and reversal of the stick. The working area shall be provided with uniform illumination, and when specified (see 6.2) include a light-line indicator.

3.5.3 Knife. The cutting knife shall be constructed of steel best suited for this type of equipment. The knife shall be designed to provide solid seating and bolting to the knife bar. Not less than two separate settings shall be provided on the knife to compensate for wear. Each cutter shall be equipped with six cutting knives and storage safety guards.

3.5.4 Knife bar. The knife bar shall have a machined seat for solidly seating the knife. Adjusting and leveling devices shall be provided to ensure correct contact of the knife blade with the cutting stick when the bottom of the cutting stroke has been reached. The face and back of the knife bar shall have machine-finished bearing surfaces.

3.5.5 Cutting stick. The cutting stick shall be not less than 0.500 inch or more than 0.750 inch square and shall fit snugly within the recess provided in the table. Each cutter shall be equipped with 36 cutting sticks.

3.5.6 Paper clamp. A manually-controlled, hydraulically-operated clamp shall be provided to firmly hold the paper stock during the cutting operation. Adjustment of the clamp pressure on the stock and the amount of pressure shall be indicated on a gauge. The clamp shall be provided with a detachable sole plate of sufficient length to cover the width of the clamping surface.

3.6 Gauges.

3.6.1 Back gauges.

3.6.1.1 Power model. The back gauge may be manually operated or power driven. The gauge shall maintain the setting when moved to any distance from the knife within the range specified in table I. The distance between the gauge and the knife shall be measured on a corrosion-resistant steel band with an accuracy of

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

0.010 inch. A centrally located dial, illuminated and magnified, shall be built into the cutter for reading the band from the operator's position. A locking device, with a control located at the front of the cutter, shall be provided to secure the setting against movement during the cutting operation. The face of the gauge shall fit the surface of the table in such a manner that any movement of the gauge forward shall guide the complete stack of paper stock.

3.6.1.2 Spacer model. The back gauge shall be motor driven with a built-in electric brake on the lead screw to positively lock the back gauge in place. Positioning of the back gauge shall be controlled by a magnetic signal. Magnetic signals shall be placed on a magnetic tape or cylinder or erased by remote switches to provide for programs of "forward" stop positions and "reverse" limits to travel on any of 16 to 24 channels. Any combination of channels shall be usable for programs. Programs shall be set up: (a) on machines using the tape - by positioning the back gauge where stops are desired and marking the tape at those positions; or (b) on machines using the cylinder - while cutting the first lift of stock, marking the stop positions on the cylinder by the "cut-mark" method. The back gauge shall start forward automatically after each cutting cycle of the knife. On cutters over 37 inches (939.8 mm) wide, a two-speed drive system, both fast and slow, shall control the lead screw. Both speeds shall be used for forward. Reverse shall only use fast speed. The slow speed shall be used to decelerate the back gauge before stopping at a stop mark. The back gauge may be operated independently from the spacer mechanism by the fast, slow, and manual control buttons.

3.6.2 Side gauges. The right and left side gauges (guide plate) shall be fixed perpendicular to the horizontal plane of the table and perpendicular to the vertical plane traveled by the knife.

3.7 Accuracy. Corresponding edges of trimmed sheets shall not differ in length more than 0.03 inch, and adjacent edges of the sheets shall be perpendicular within 5 minutes of arc. The trimmed surface of the stack shall be smooth and free of chatter marks, and the individual sheets shall have clean; straight edges.

3.8 Electrical requirements. All electrical equipment and wiring shall conform to NFPA No. 70 (see 6.2) .

3.8.1 Motors. The electric motors shall conform to NEMA Standard MG-1.

3.9 Maintainability. All major assemblies and installed attachments shall be accessible for maintenance, repair and replacement without the removal of other major assemblies and installed attachments. Covers or plates that must be removed for

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:46Z
Check the source to verify that this is the current version before use.

component adjustment, repair, replacement or maintenance shall be equipped with quick-disconnect fastenings.

3.10 Human factors engineering. The papercutter shall conform to accepted human factors engineering design criteria as described in MIL-STD-1472. Special design emphasis shall be given, but not limited to, paragraphs 4 (General Requirements), 5.1 (Control/Display Integration), 5.2 (Visual Displays), 5.3 (Audio Displays), 5.4 (Controls}, 5.5 (Labeling), 5.6 (Anthropometry), 5.7 (Ground Workspace Design Requirements), 5.9 (Design for Maintainability) and 5.13 (Hazards of Safety) of MIL-STD-1472, as applicable.

3.11 Safety. All rotating or reciprocating parts that are of such nature, or so located, as to become a hazard to operating personnel shall be fully enclosed or guarded. A two-hand interlock control requiring the simultaneous use of both hands to start the cutting stroke shall be provided. In addition, a built-in, nonrepeat device shall limit each operation to one stroke. An overload safety device shall be provided that shall limit or disengage the power when the knife strikes a hard foreign object, such as metal, on the downward stroke.

3.11.1 Noise limits. The noise produced by the cutters shall conform with MIL-STD-1474 requirements, with the exception of MIL-STD-1474 5.2, 5.3 and 5.4, when tested in accordance with 4.5.1 of this specification. The provision of MIL-STD-1474, 4.3 and 4.4 shall be provided if and only if MIL-STD-1474, 5.1.1.2 procedures have been pursued and documented to the satisfaction of the procuring activity and written permission to exceed the 85 dB(A) limit is obtained from the procuring activity. Hazard signs shall conform with MIL-STD-1474, 4.3, except the sign shall state "HEARING PROTECTION REQUIRED WITHIN (specify) FEET". The sign shall be readable at the distance indicated on the sign.

3.12 Fungus and moisture resistance. The electrical circuitry, including all components and connections, shall be protected from the effects of fungus growth and moisture by an overall treatment with a varnish conforming to MIL-V-173, composition I or II, as applicable (see 3.12.1), with l-percent copper 8-quinolinolate (by weight) based on the nonvolatile content of the varnish, except as specified below:

a. Components or circuit elements that are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.
b. Components or circuit elements whose functions will be adversely affected by the varnish coating shall not be treated.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:46Z
Check the source to verify that this is the current version before use.

When used, the varnish shall be applied by spray, brush, or a combination of both to give a dry-film thickness of not less than 1 mil to component or element surfaces previously cleaned, and prepared so that the surfaces are free from all foreign matter that would interfere with the adherence or function of the varnish.

3.12.1 Composition. Composition II shall be used only if local air pollution regulations governing the application of varnish precludes the use of composition I. When composition II is used, the contractor shall provide evidence to the Government that the use of composition II is required, and shall certify that the composition II material complies with Rule 442, Usage of Solvents.

3.13 Lubrication. All surfaces requiring lubrication shall be provided with a means for lubricating.

3.13.1 Lubricants. The procedure for the selection of lubricants shall be in accordance with section 5 of MIL-STD-838. Lubricants selected shall be in accordance with chapter 2 of MIL-HDBK-113 . When the specification of the lubricant selected includes a requirement for a qualified products list (QPL) the lubricant supplied shall be from a source that is listed on the applicable QPL.

3.13.2 Lubrication fittings. Lubrication fittings shall conform to MS15003. Fittings shall be located in a protected position and shall be accessible to a grease gun conforming to MIL-G-3859. Accessibility to fittings shall be provided without the removal or adjustment of accessories or parts. Panels and plates equipped with hand-operable, quick disconnect fasteners may be removed to provide accessibility.

3.13.3 Pressure-release device. A pressure-release device shall be provided where the use of pressure lubricating equipment could damage grease seals or other parts.

3.14 Treatment and Painting. The portions of the cutter normally painted internally and externally shall be cleaned, treated, and painted in accordance with MIL-T-704, type F or G, as applicable. Unless otherwise specified (see 6.2), top coat color shall be camouflage green 383 conforming to MIL-C-46168.

3.15 Identification marking. The cutters shall be identified in accordance with MIL-STD-130. The marking shall be applied to the cutters on identification plates conforming to MIL-P-514, type 1, style 1, composition C of type 1, grade A, class 1 material. Each plate shall be attached by screws, bolts or rivets in a location where the plate will be both visible and legible.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:46Z
Check the source to verify that this is the current version before use.

3.16 Instruction and warning plates. Each cutter shall be equipped with instruction plates or diagrams, including warnings and cautions, describing any special or important procedures to be followed in assembling, operating or servicing the cutter. Plates shall conform to MIL-P-514, type III, composition C of type 1, grade A, class 1 material. Each plate shall be attached by screws, bolts or rivets in a location where the plate will be both visible and legible.

3.17 Workmanship.

3.17.2 Castings and forgings. All parts, components, and assemblies of the cutter that include castings and forgings shall be clear of harmful extraneous material such as sand, dirt, sprues, scale, and flux, Rework shall be limited to procedures that do not reduce mechanical properties or affect function.

3.17.2 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square and true. Flame-cutting, using tips suitable for the thickness of the steel, may be employed instead of shearing and sawing. All bends shall be made with controlled means to ensure uniformity of size and shape. Precautions shall be taken to avoid overheating. Heated steel shall be allowed to cool slowly. External surfaces shall be free from burrs, sharp edges, and corners, except when sharp edges, or corners are required or where they are not detrimental to safety.

3.17.3 Bolted connections. Bolt holes shall be accurately formed and shall have the burrs removed. Washers or lockwashers shall be provided where necessary. Matching thread areas securing bolts conforming to ANSI/SAE J429 or capscrews shall be of sufficient strength to withstand the tensile strength of the bolt shank. All fasteners shall be correctly torqued and shall have full thread engagement. Bolts shall protrude through nuts or nut plates not more than two full threads.

3.18 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, mill scale, and other foreign matter that can be removed by chipping and wire brushing. Parent materials, weld filler metals, and fabrication techiniqes shall be as required to enable the cutter to conform to the examination and test requirements specified in section 4. Parts to be joined by fillet welds shall be brought into as close contact as possible and in no event shall be separated by more than 3/16 inch unless appropriate bridging techniques are used.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for ensuring that components and materials are manufactured, examined and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.7).

4.3 First article inspection.

4.3.1 First article examination. The first article shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The first article shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling Sampling for examination shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.3.

4.4.3 Tests. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2.

4.5 Inspection Procedure.

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:46Z
Check the source to verify that this is the current version before use.

4. 5.1 Examination. The cutter shall be examined as specified herein for the following defects:

101. Materials not as specified (see 3.3).
102 l Material not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration for the applicable storage and operating environments (see 3.3.1).
103. Dissimilar-metals, as defined in MIL-STD-889, are not effectively insulated from each other (see 3.3.1.1).
104. Contractor does not have documentation available for identification of material, material finishes or treatment (see 3.3.1.2).
105. Used, rebuilt, or remanufactured components, pieces or parts incorporated in the cutter (see 3.3.2).
106. Capacities and dimensions not as specified (see 3.4.1).
107. Base and forms not as specified (see 3.5.1).
108. Table not as specified (see 3.5.2).
109. Knife not as specified (see 3.5.3).
110. Knife bar not as specified (see 3.5.4).
111. Cutting stick not as specified (see 3.5.5).
112 l Paper clamp not as specified (see 3.5.6).
113. Back gauges not as specified (see 3.6.1).
114 l Power model not as specified (see 3.6.1.1).
115. Spacer model not as specified (see 3.6.1.2).
116. Side gauges not as specified (see 3.6.2).
117. Accuracy not as specified (see 3.7).
118. Electrical requirements not as specified (see 3.8).
119. Motors not as specified (see 3.8.1).
120. Maintainability features not as specified (see 3.9).
121. Human factors not as specified (see 3.10).
122. Safety requirements not as specified (see 3.11).
123. Noise level not as specified (see 3.11.1).
124. Fungus and moisture resistance treatment not as specified (see 3.12).
125. Composition not as specified (see 3.12.1).
126. Lubrication not as specified (see 3.13).
127. Lubricants not as specified (see 3.13.1).
128. Lubrication fittings not as specified (see 3.13.2).
129. Pressure release device not as specified (see 3.13.3).
130. Components missing or not as specified.
131. Treatment and painting not as specified (see 3.14).
132. Workmanship not as specified (see 3.17).
133. Castings and forging not as specified (see 3.17.1).
134. Metal fabrication not as specified (see 3.27.2).
135. Bolted connections not as specified (see 3.17.3).
136. Welding not as specified (see 3.18).
137. Identification marking not as specified (see 3.15).
138. Instruction and warning plates not as specified (see 3.16).

4.5.2 Tests.

4.5.2.1 Test conditions. Prior to test, the cutters shall be lubricated with oils and greases conforming to MIL-STD-838 and

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:46Z
Check the source to verify that this is the current version before use.

MIL-HDBK-113. Oils and greases shall be those designated for use in the ambient temperature at which the test is being conducted.

4.5.2.2 Table flatness. The flatness of the table surface shall be determined using a straightedge conforming to MIL-S-15769 and a feeler gauge. Variation in excess of that specified in 3.5.2 when checking the table surface parallel to the edges and the diagonals shall constitute failure of this test.

4.5.2.3 Accuracy.

4.5.2.3.1 Squareness and length of sheet. A stack of 24-pound (10.8 kg) book paper of the height specified in table II shall be trimmed to the dimensions specified in the table. Sample sheets shall be selected from near-bottom of the cut stack and examined. Nonconformance to 3.7 shall constitute failure of this test.

TABLE II. Height of stack and dimensions.

Cutter size	Height of stack inches	Trimmed dimensions inches
1	2 inches (50.8 mm)	1/2 X 17 inches (12.7 X 431.8 mm) 8 1/2 X 11 inches (215.9 X 279.4 mm) 11 X 17 inches (279.4 X 431.8 mm)
2	3 inches (76.2 mm)	3/4 X 5 inches (19.05 X 635.0 mm) 17 X 22 inches (431.8 X 558.8 mm) 22 X 25 inches (558.8 X 635.0 mm)
3	5 inches (127.0 mm)	3/4 X 29 1/2 inches (19.05 X 749.3 mm) 10 X 12 inches (254.0 X 304.8 mm) 34 1/2 X 44 1/2 inches (876.3 X 1130.3 mm)
4	6 1/2 inches (165.1 mm)	3/4 X 46 inches (19.05 X 1168.4 mm) 35 X 45 inches (889.0 X 1143.0 mm) 46 X 46 inches (1168.4 X 1168.4 mm)
5	6 1/2 inches (165.1 mm)	3/4 X 56 inches (19.05 X 1422.4 mm) 23 X 36 inches (584.2 X 914.4 mm) 56 X 56 inches (1422.4 X 1422.4 mm)
6	6 1/2 inches (165.1 mm)	3/4 X 63 inches (19.05 X 1600.2 mm) 23 X 36 inches (584.2 X 914.4 mm) 63 X 63 inches (1600.2 X 1600.2 mm)
7	7 1/2 inches	1 X 89 inches (25.4 X 2260.6 mm) 34 X 44 inches (863.6 X 1117.6 mm) 89 X 89 inches (2260.6 X 2260.6 mm)

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:46Z
Check the source to verify that this is the current version before use.

4.5.2.3.2 Indicator band reading. At completion of the cuts required in 4.5.2.3.1, the indicator band reading shall be checked. Nonconformance to 3.6.1.1 shall constitute failure of this test.

4.6 Noise level test. Noise levels shall be measured in accordance with MIL-STD-1474 requirements and reported in the format indicated by MIL-STD-1474, figure 11. As a minimum: Noise levels shall be measured when equipment is operating under full load. MIL-STD-1474 , 5.1.2.1.4 contours shall be taken at not fewer than 12 equal horizontal arc increments; one increment shall include data from the noisiest position. Additionally, the noise level at the typical operating position shall be provided as dB(A) level. Failure to comply with MIL-STD-1474 and 3.11.1 provisions shall constitute failure of this test.

4.7 Inspection of packaging. The preservation, packing, and marking of the cutters for level A, B, or commercial shall be examined to determine compliance with ASTM D 3951.

5. PACKAGING

5.1 Preservation and Packing. Preservation and packing of the cutters shall be level A, B, or commercial, as specified (see 6.2).

5.1.1 Levels A, B and commercial. Preservation and packing of the cutters shall be in accordance with level A, B, or commercial requirements of ASTM D 3951.

5.2 Marking.

5.2.1 Military. Marking for levels A or B shall be in accordance with MIL-STD-129.

5.2.2 Commercial. Marking for commercial packaging shall be in accordance with ASTM D 3951. Additionally, each shipping container shall be marked with the cube and gross weight.

6. NOTES
(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The paper cutters are intended to be used for cutting, squaring, and trimming stacks of paper for printing of maps, forms, and miscellaneous documents in both fixed-site and mobile van environments.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

c. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is not required for inspection and approval and the number of units required (see 3.2).
e. Light-line indicator required (see 3.5.2).
f. Electric power required (see 3.8).
g. Color required when other than as specified (see 3.14).
h. Degree of preservation and degree of packing required (see 5.1).

6.3 First article. When a first article inspection is required, the item should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests, and approval of the first article test results and disposition of the first article.


6.4 Data requirements. The contracting officer should include requirements for such data as technical publications, instructional materials, illustrated parts lists, and contractor's maintenance and operation manual to be furnished with each cutter.

6.5 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instructions on shipment of cutters.

6.6 Lubricants. MIL-STD-838 prescribes the policy for using specification-type products wherever possible and provides specific requirements for potential use of non-standard proprietary products. MIL-STD-838 is implemented by MIL-HDBK-113. The contracting officer should note that unless otherwise authorized by the: US ARMY BELVOIR RD&E CTR, ATTN SATBE FL, 20101 GRIDLEY RD, STE 104, FT BELVOIR VA 22060-5818, lubricants, fluids, and greases for ground equipment systems must be restricted to those listed under MIL-HDBK-113, chapter 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

6.7 Part or Identifying Number (PIN). The part or identifying number (PIN) of papercutters covered by this specification should be designed in the following form:

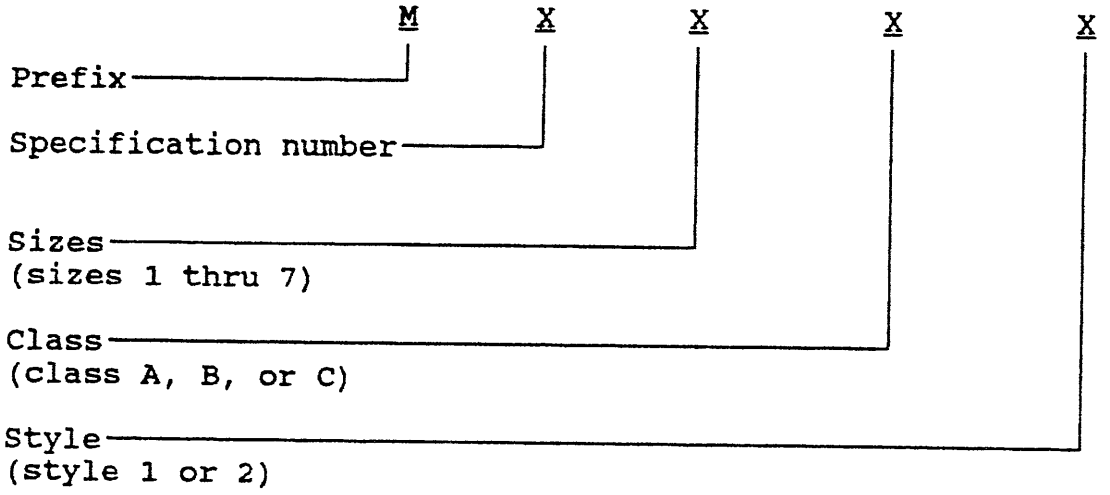

6.8 Classification of changes. Changes in classification of the cutter from the previous edition are as follows:

Old Designation	New Decimation
Size 2	None
Size 3	None
Size 7	Size 4
Size 8	Size 5
Size 9	Size 6
Size 10	Size 7
None	Class A
None	Class B
None	Class C
None	Style 1
None	Style 2

6.9 Subject term (key word) listing.

Cutters, paper
Guillotine papercutter
Papercutter
Papercutter, guillotine

6.10 Changes from previous issue. Asterisks (or vertical lines} are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army - ME
Review activities:
Army - GL
DLA - GS

Preparing activity:
Army - ME
Project 3610-A348

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS -

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-C-43141E(ME)	2. DOCUMENT DATE (YYMMDD) 9408311

3. DOCUMENT TITLE
CUTTERS; PAPER, GUILLOTINE: FLOOR MODEL, ELECTRIC-MOTOR-DRIVEN

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (if applicable) (2) DSN	7. DATE SUBMITTED

8. PREPARING ACTIVITY

a. NAME Carolyn B. Johnson	b. TELEPHONE (Include Area Code) (1) Commercial (703) 704-3468 (2) DSN 654-3468
c. ADDRESS (Include Zip Code) US ARMY BELVOIR RDE CTR ATTN SATBE TSE 10101 GRIDLEY RD STE 104 FT BELVOIR VA 22060-5818	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: DEFNS QLTY & STDZN OFC 5203 LEESBURG PIKE STE 1403 FLS CHURCH VA 22041-3466 Telephone (703) 756-2340 DSN 289-2340

Source: https://assist.dla.mil -- Downloaded: 202610-21T20:46Z
Check the source to verify that this is the current version before use.