MIL-S-43140A

20 May 1968
SUPERSEDING
MIL-S-43140 (GL)
23 March 1963

MILITARY SPECIFICATION

STAND, FOLDING, SERVICE TRAY

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type and size of folding stand for service trays.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-636 - Box, Fiberboard.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" 4-Way (Partial) Pallet Skids, Runners, or Pallet-Type Base.

FSC 7195

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

* 3.1 First article.- When specified (see 6.2), before production is commenced, a sample folding stand shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

* 3.2 Standard product.- The folding stand covered herein shall be a current standard product of the manufacturer, except for any changes necessary to meet specification requirements. All folding stands furnished under this specification and any one contract shall be identical.

* 3.3 Materials.- Materials not definitely specified shall be of the quality normally used by the manufactuer in fabricating his standard commercial folding stand.

* 3.3.1 Webbing.- The webbing shall be a minimum of 2 inches in width and shall be fabricated of either cotton, or plastic reinforced with nylon cord. The color of the webbing shall be a medium brown.

* 3.3.2 Tube.- The tube shall be steel, chromium plated, and of a commercial grade.

* 3.3.3 Pins or rivets.- The pins or rivets shall be steel, chromium plated, and of a commercial grade.

* 3.3.4 Screws and washers.- The screws and washers shall conform to the type and size used in commercial practice and shall be chromium plated.

3.3.5 Caps, tube.- Tube caps shall be commercially available items made from nonmarking rubber or plastic. Size and design shall insure a snug fit to tube ends, and protective cushion for floor surfaces.

3.4 Construction.- The stand shall be as shown on figure 1, and shall be constructed to meet the performance tests specified in 4.5 with no visible signs of deformation. After examination, the stand shall be capable of being folded with a normal amount of applied force.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

3.4.1 Frame.- The frame shall be formed from tube specified in 3.3.2. The tube shall have a minimum outside diameter of 1 inch and, after forming, shall show no creases, corrugations, or other forms of malformation. All open ends of tube shall be closed by application of tube caps specified in 3.3.5. The tube caps shall not mark the floor surface when tested as specified in 4.5.2.

3.4.2 Braces.- Braces shall be formed from tube specified in 3.3.2. The tube shall be a minimum outside diameter of 3/8 inch and shall be welded to the frame as shown on figure 1.

3.4.3 Straps.- Straps shall be the material specified in 3.3.1 and shall be positioned on the frame as shown on figure 1, attached with a minimum of four screws and washers specified in 3.3.4 .

3.5 Finish.- The stand, except for the webbing and tube caps, shall be chromium plated in accordance with commercial practice.

* 3.6 Marking.- Each stand shall be marked with the manufacturer's trade name or trademark readily identifiable with said manufacturer.

* 3.7 Workmanship.- Screws shall be drawn tight. Surface of parts to be welded or brazed shall be clean and free from scale. Welds and brazes shall be sound, smooth, and free from pits, cracks, and flashes.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.- When a preproduction sample is required, it shall be examined for the defects listed in table I, for compliance with dimensions specified, and tested as specified in 4.5.1 and 4.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements or referenced specifications, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.3.2 In process examination.- Examination shall be made during the manufacturing process for the welding operation (see 3.7) to establish that no deviation is made from the indicated requirement. Whenever nonconformance is noted, correction shall be made to affected items and process.

* 4.3.3 Inspection of the end item.- The inspection lot shall consist of all stands offered for inspection at one time. The sample unit for this inspection shall be one completely fabricated folding stand.

4.3.3.1 Visual examination.- The end item shall be examined for defects in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not as specified	X	
	Stains, discolorations or blotches		X
	Cuts, scratches or abrasions	X	
Construction and workmanship	Tubing creased, corrugated or otherwise malformed	X	
	Not clean		X
	Any component omitted or does not perform function intended	X	
	Webbing not color specified		X
	Webbing torn, frayed or deteriorated	X	
	Webbing not attached as specified		X
	Tube caps not as specified		X
Welding	Not a fillet weld		X
	Weld has rough edges	X	
	Burned or reduced areas		X
	Not sound	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

4.3.3.2 Dimensional examination.- Dimensional examination shall be made of the complete folding stand to determine compliance with dimensions specified herein. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

* 4.3.3.3 Testing of the end product.- When a preproduction sample is not required, the tests specified in 4.5 shall be performed on the first production unit.

4.4 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing, and marking are in compliance with section 5 of this specification. Defects shall be scored as specified below. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 2.5, expressed in terms of defects per hundred units.

TABLE II.- Examination of preparation for delivery

Examine	Defect
Marking	Missing, incorrect, illegible, of improper size, location, sequence, or method of application
Materials	Any nonconforming component, component missing or damaged
Contents	Number per container is more or less than required

4.4.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

4.5 Tests.-

4.5.1 Load test.- A tray weighing approximately 1.5 pounds shall be placed across the width of the completely fabricated stand. An evenly distributed static load of not less than 200 pounds shall be placed on the tray and permitted to remain for not less than 10 minutes and then removed. The stand shall then be examined and folded to determine compliance with 3.4.

4.5.2 Marking test.- After completing the test specified in 4.5.1, the test load shall be replaced with a 25 pound static load. The stand, with

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

load, shall be placed on a wooden floor. A device shall be attached to the stand and the stand shall be pulled across the floor for not less than 1 foot without marking the floor to determine compliance with 3.4.1.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C, as specified (see 6.2).

* 5.1.1 Level A.- Each stand shall be collapsed to its smallest dimensions and packaged in snug-fitting fiberboard box conforming to style FPF, type CF, variety SW, or type SF, class domestic of PPP-B-636. Each box shall be closed in accordance with the appendix of PPP-B-636.

* 5.1.2 Level C.- The stands shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Six stands, packaged as specified in 5.1, shall be packed flat in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B.- Six stands, packaged as specified in 5.1, shall be packed flat in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

* 5.2.2.1 When specified (see 6.2) the shipping container shall be V3c or V3s, fabricated and closed in accordance with PPP-B-636. The shipping container material may also be grade V4s of PPP-F-320.

5.2.3 Level C.- The stands, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Palletization.- Stands, packed as specified, shall be palletized in accordance with load type I of MIL-STD-147, except that for overseas shipment the overall height of the load shall not exceed 43 inches. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The folding stand is intended to be used in hospital dining halls to hold serving trays before and after serving meals to patients.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) First article.- When a preproduction sample is required (see 3.1).

(c) When weather-resistant fiberboard shipping containers are required for level B packing (see 5.2.2.1).

(d) Selection of the applicable level of packaging and packing (see 5.1 and 5.2).

6.3 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content, irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 84

Review activities:


Army - MD
Air Force - 84, 85

Preparing activity:

Army - GL

Project No. 7195-0056

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.

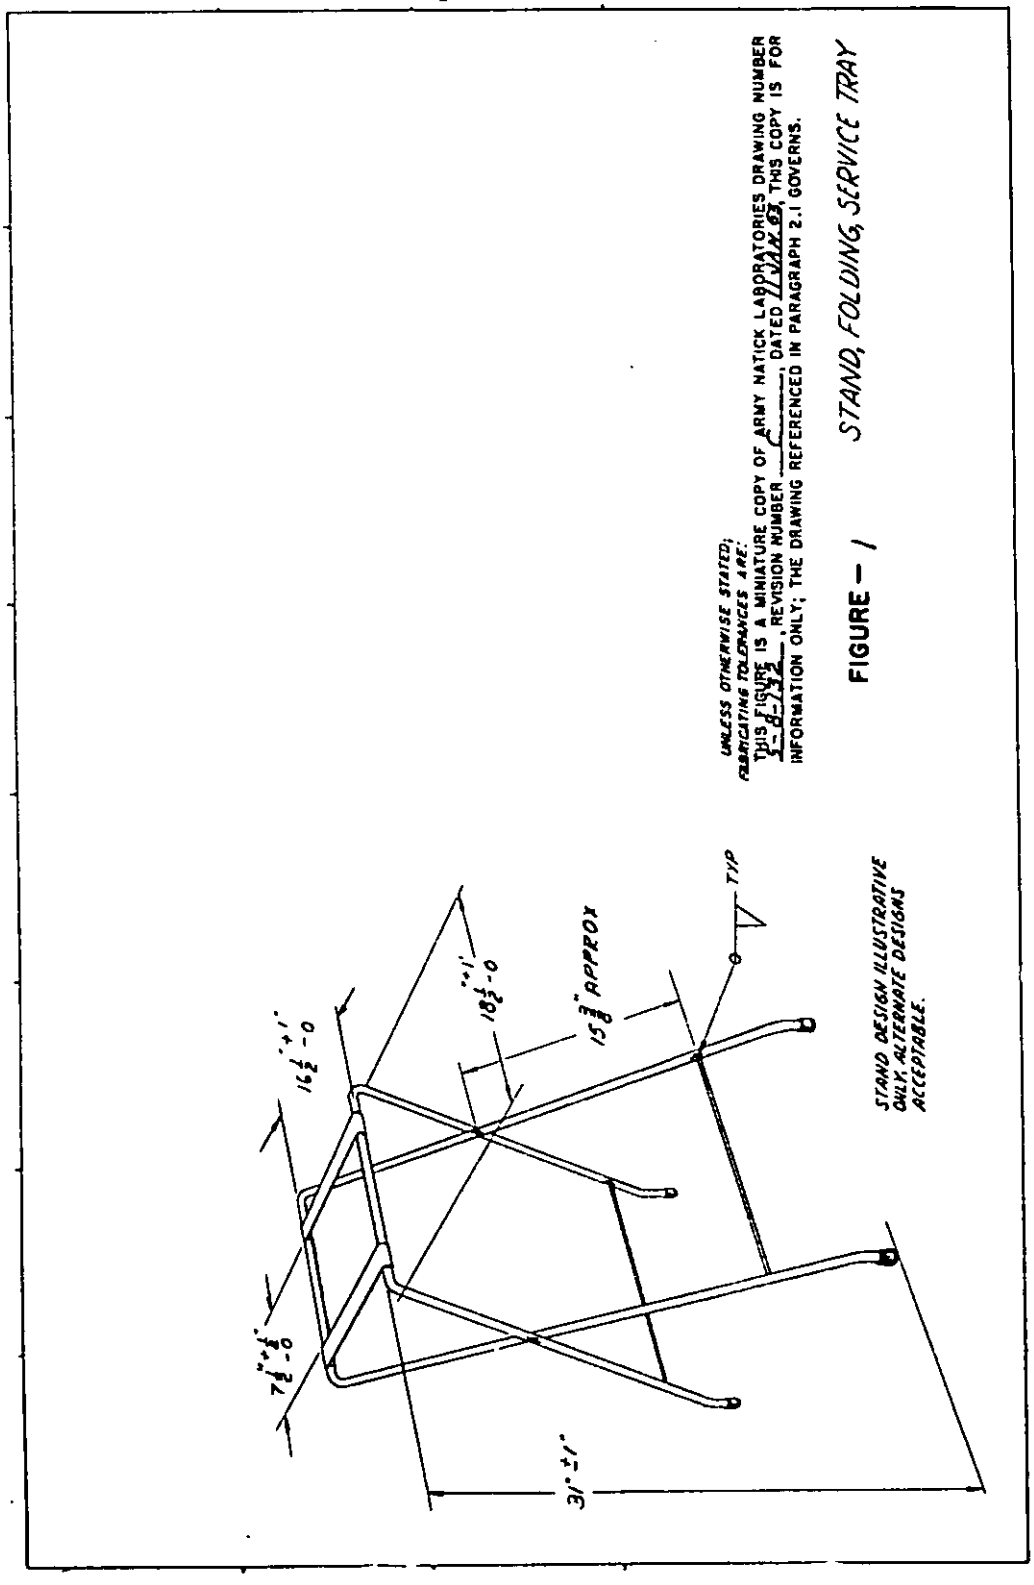

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:46Z
Check the source to verify that this is the current version before use.