MIL-C-48568A
7 DECEMBER 1984
SUPERSEDING
MIL-C-48568
10 OCTOBER 1977
AND AMENDMENT 2
19 OCTOBER 1981

MILITARY SPECIFICATION

CATAPULT, AIRCRAFT EJECTION SEAT: CKU-7/A ASSEMBLY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the CKU-7/A aircraft ejection seat catapult assembly hereinafter referred to as the catapult assembly.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.1), the following specifications and standards of issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-14814	Cartridge, Impulse M270
MIL-I-46625	Initiator, Cartridge Actuated: M3A2 and M3A1C Assembly

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Ordnance Station, Standardization/Documentation Division (524), Indian Head, MD 20640 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-453	Inspection, Radiographic
MIL-STD-810	Environmental Test Methods
MIL-STD-1168	Ammunition Lot Numbering
DOD-STD-2101	Classification of Characteristics
MS 17983	Compass-Magnetic, Pilots Standby
MS 28741	Hose Assembly - Detachable End Fitting, Medium Pressure

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

Naval Ordnance Station, Indian Head, MD (Code Ident 14083)

11820361	Catapult, Aircraft Ejection Seat, Assembly

Naval Sea Systems Command (Code Ident 53711)

5184318	Box, Packing Assembly for Rocket Catapult

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First article. When specified, a sample shall be subject to first article inspection (see 4.4 and 6.2).

3.2 Materials. All materials, parts and assemblies shall be in accordance with drawing 11820361, this specification and the documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

3.3 Age.

3.3.1 Explosive components. All explosive components, including but not limited to ignition powders and igniters, shall be manufacturered or recertified within the 12 months prior to the contract scheduled deliver date for the assembly lot. Primers shall be manufactured or recertified within the 24 months prior to the contract scheduled delivery date for the assembly lot.

3.3.2 Propellant. The propellant shall be manufactured within the 150 days prior to the contract scheduled delivery date for the catapult assembly lot.

3.4 Ballistics. The catapult, loaded with acceptable explosive components shall meet the following ballistic performance characteristics and function without mechanical failure (see 6.4 for definition of terms).

3.4.1 Booster section. The booster section shall comply with the requirements of TABLE I using an ejected mass of 459 lbm.

3.4.2 Rocket section. The rocket section shall comply with the requirement of TABLE II with the nozzle angle set at 40°.

TABLE I. Booster requirements. 1/

Temperature (°F)	-65 to -70	65 to 70	160 to 165
Acceleration (g), max	20	18	20
Rate change of acceleration (g/s), max	300	300	300
Axial thrust (lbf), max	7000	7000	7300
Separation velocity (ft/s), min	37	40	42
Launch time (ms), max	210	200	200
Ignition delay (ms), max	30	30	30

TABLE II. Rocket requirements. 1/

Temperature (°F)	-65 to -70	65 to 70	160 to 165
Resultant impulse ($lb_f s$), min	1100	1100	1100
Resultant thrust (lbf), max	7350	7350	7600
Ignition delay (ms), max	25	25	25
Action time (ms), max	550	450	450

1/ See 6.4 for definition

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

3.4.3 Initiation. The rocket catapult shall fire when initiated by a source delivering an output equal to that of an M3A1 initiator in accordance with MIL-I-46625 at the end of 10 feet of aircraft hose size No. 4 of MS 28741 at 70 ± 5°F. Equivalent initiation input for test is 1100 psi pressure source producing a 40,000 to 50,000 psi per second positive rate of change.

3.4.4 Other requirements. In addition to meeting the ballistic requirements, none of the following shall occur during test firing of the rocket catapult:

(a). No unit component including but not limited to O-rings, springs, or pieces of propellant shall be ejected.

(b). No component subject to loading shall fail.

(c). No excessive nozzle erosion, hot spots, or burn-through shall occur.

3.5 Torque. The components specified in TABLE III shall show no loosening or deformation upon application of breakaway torque.

TABLE III. Torque values.

Components	Seating or bottoming (inch lbf)	Breakaway (inch lbf)
Booster Tube Assembly 10551422 to Head 10551412	400 + 50, -0	200
Launcher Tube Assembly 10551423 to Mount 10551413	400 + 50, -0	200

3.6 Residual magnetism. The assembled catapult shall not deflect the indicator of a compass in accordance with MS 17983 more than 5° in either direction when passed in front of the compass at a distance of 6 inches.

3.7 Nozzle integrity. Nozzle ball/retainer O-ring shall show no indication of leakage throughout the operational range of the swivel nozzle when pressurized to 40 psig.

3.8 Release O-ring integrity. Release O-rings shall show no indications of leakage when the launcher tube-mount subassembly is pressurized to 200 psig.

3.9 Protective finish. Protective finish shall be in accordance with the applicable specifications and drawings and shall apply to all surfaces of the component regardless of contour configuration.

3.10 Radiographic requirements. Each loaded rocket catapult shall be radiographically inspected for the presence, condition, and correct placement of internal components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

3.11 Environmental requirements. The rocket catapult assembly shall withstand the environmental conditioning requirements of 3.11.1 through 3.11.5. The rocket catapult assemblies subjected to this conditioning shall show no evidence of disintegration of components when examined in accordance with 4.5.5.2 and shall meet the ballistic requirements of 3.4 when test fired in accordance with 4.4.2.

3.11.1 High temperature. The rocket catapult shall withstand the high temperature test of 4.4.1.1.

3.11.2 Low temperature. The rocket catapult shall withstand the low temperature test of 4.4.1.2.

3.11.3 Temperature shock. The rocket catapult shall withstand the temperature shock test of 4.4.1.3.

3.11.4 Temperature - altitude - humidity. The rocket catapult shall withstand the temperature - altitude - humidity test of 4.4.1.4.

3.11.5 Vibration. The rocket catapult shall withstand the vibration test of 4.4.1.5.

3.12 Identification marking. Each rocket catapult shall be identified in accordance with drawing 11820361, to include an identification label, a warning label, and an installation label.

3.12.1 Production lot designations. The production lot number shall follow MIL-STD-1168. The construction of the lot shall be as follows:

IHM	75	D	002	007
a	b	c	d	e

where: a = Manufacture's Identification Code
b = The year of manufacture of the oldest batch of propellant in the lot.
c = The month of manufacture of the oldest batch of propellant in the lot expressed as an alpha code in accordance with 4.1.3 of MIL-STD-1168
d = Lot interfix number (controlled by Naval Ordnance Station, Code 5122, Indian Head, MD 20640 or procuring activity)
e = Lot sequence number - lot number (manufacturer is responsible for the assignment of lot numbers).

3.13 Workmanship. The workmanship shall be that required by the best industrial practices governing the quality production of interchangeable parts for mantaining the dimensions, finishes, tolerances, and quality specified herein and on the applicable drawings and specifications. All components and assemblies shall be free from burrs, contamination, corrosion, sharp edges, or foreign material which could result in malfunction of the unit or components, or be a safety hazard in handling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformation inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be performed under the following conditions:

a. Temperature: Room ambient 65 to 95°F

b. Altitude: Normal ground

c. Vibration: None

d. Humidity: Room ambient to 95 percent relative, maximum

4.4 First article inspection. Unless otherwise specified in the contract or order (see 6.2), a first article sample of 21 loaded rocket catapult assemblies, manufactured in accordance with 3.1, shall be submitted to the Naval Ordnance Station, Indian Head, MD 20640 for first article inspection. The first article samples shall be subjected to the quality conformance inspection of 4.5, with the exception of the test firing of 4.5.5, followed by environmnetal testing, radiograpic examinations and static firing in the sequence specified on TABLE IV. Acceptance of the first article sample shall be based on no defects in the sample. Any production of the rocket catapult assemblies by the contractor's prior to approval of the first article sample, shall be at the contractors risk. First article samples shall not be included as part of the quantity specified for delivery in the contract (see 6.2).

4.4.1 Environmental tests.

4.4.1.1 High temperature. The rocket catapult assembly shall be subjected to a high temperature test in accordance with Procedures I of Method 501 of MIL-STD-810 with the exception that the test item shall be maintained at 165°F for 50 hours minimum.

4.4.1.2 Low temperature. The rocket catapult assembly shall be subjected to a low temperature test in accordance with Procedure I of Method 502 of MIL-STD-810 with the exception that the test item shall be maintained at -65°F for 50 hours minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

TABLE IV. First article evaluation test program. 1/

Test Para.	Test	Unit Number																				
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
4.5.5.2	Radiographic inspection	1/ a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a
4.5.1.5	Vibration 165°F	b									b		b									
4.4.1.5	Vibration -65°F		b	b								c										
4.4.1.3	Temperature shock				b	b	b				c	b	c									
4.4.1.4	Temperature-Altitude-Humidity							b				d	d									
4.4.1.1	High temperature								b		e	e	f									
4.4.1.2	Low temperature									b	d	f	e									
4.5.5.2	Radiographic inspection	c	c	c	c	c	c	c	c	c	f	g	g									
4.4.2	Static fire 165°F	d				d	d		d		g		h				b	b	b			
4.4.2	Static fire 70°F													b	b	b						
4.4.2	Static fire -65°F		d	d	d			d		d		h								b	b	b

1/ Letters denote sequence of testing

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.4.1.3 Temperature shock. The rocket catapult assembly shall be subjected to a temperature shock test in accordance with Procedure I of Method 503 of MIL-STD-810 with the exception that the duration of each cycle shall be 8 hours.

4.4.1.4 Temperature-altitude-humidity. The rocket catapult assembly shall be subjected to a temperature-altitude-humidity test in accordance with Procedure I of Method 518 of MIL-STD-810.

4.4.1.5 Vibration. The rocket catapult assembly shall be subjected to random vibration for jet aircraft in accordance with Method 514 of MIL-STD-810. Before vibration, units shall be temperature conditioned in accordance with TABLE III. The input vibratory acceleration wo factor shall be 0.25 G^2/HZ. If the rocket catapult must be removed from the environmental conditioning chamber or if the temperature falls outside the specified temperature limits for a period of more than 5 minutes, the testing shall be stopped and the unit shall be reconditioned. A reconditioning time of 2 minutes for every minute the unit is outside the specified temperature envolope shall be required. A continuous temperature history of the unit shall be kept for all conditioning and testing time. Unless otherwise noted, the rocket catapult shall be mounted on a test fixture in a manner that will simulate actual seat/aircraft installation and excited through the attachment fittings.

4.4.2 Static firing test. Within 30 days after completion of environmental tests, the rocket catapults shall be static fired at the Naval Ordnance Station, Indian Head, Maryland 20640. The sample shall be temperature conditioned per TABLE III for a minimum of 8 hours and test fired within 10 minutes after removal from the conditioning chamber to verify conformance to the requirements of 3.4. Non conformance with TABLE I, or any other requirement of 3.4.1 shall be cause for rejection of the first article sample.

4.5 Quality conformance inspection. The quality conformance inspection shall consist of the examinations and tests of 4.5.4 thru 4.5.6 conducted on samples selected as specified in 4.5.2. The contractor is responsible for assuring that all rocket catapults offered for acceptance meet all the requirements of the applicable drawings and specifications. Items of inspection shall be serialized and inspection data traceable to a specific serial number.

4.5.1 Test reports. When specified in the contract or order (see 6.2), the contractor shall furnish test reports to the procuring activity. Test reports shall include the following information:

a. Propellant description (see 6.3.1).

b. Static firing performance test results (see 4.5.5 and 6.3.2).

c. Summary sheet (see 6.3.3).

d. Ammunition data cards (see 6.3.4).

e. Propellant/assembly production records (see 6.3.5).

f. Certification of age of explosive components and propellant (see 3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.5.2 Sampling for quality conformance inspection.

4.5.2.1 Lot. A lot shall consist of an identifiiable group of assembled units produced by a homogeneous process and load with a single lot of acceptable cartridges in accordance with MIL-C-14814.

4.5.2.2 Sampling for examination. Designation of defects (critical, major, and minor) shall be in accordance with DOD-STD-2101.

a. Critical and major defects: Each rocket catapult assembly shall be examined for all critical and major defects.

b. Minor defects: Samples for examination shall be selected in accordance with inspection level II of MIL-STD-105.

4.5.2.3 Sampling for tests. Sampling for tests shall be in accordance with the following:

4.5.2.3.1 Static firing tests. Twenty-one rocket catapult assemblies from each lot shall be submitted to the Naval Ordnance Station, Indian Head, Maryland 20640 for static firing in accordance with 4.5.5. Sample rocket catapult assemblies shall not be preselected during production. Rocket catapult assemblies selected for static firing shall not be included as a part of the quantity specified for delivery in the contract (see 6.2). The ballistic sample size shall be divided as equally as possible among rocket motor batches.

4.5.2.3.2 Breakaway torque. Each rocket catapult assembly shall be subjected to the breakaway torque test of 4.5.6.2.

4.5.2.3.3 Residual magnetism. Each rocket catapult assembly shall be subjected to the residual magnetism test of 4.5.6.3.

4.5.2.3.4 Nozzle O-ring integrity. Each rocket catapult assembly shall be subjected to the nozzle ball/retainer O-ring leak test of 4.5.6.4.

4.5.2.3.5 Release O-ring integrity. Each rocket catapult assembly shall be subjected to the release O-ring leak test of 4.5.6.5.

4.5.3 Resubmission of rejected lot. A sample of 21 rocket catapult assemblies shall be selected in accordance with 4.5.2.3.1 and submitted when, with prior approval of the procuring activity, the contractor requests that the rejected lot be test fired under different conditions, or the contractor believes a rejected lot may be reworked to meet the requirements of this specification.

4.5.4 Examination.

4.5.4.1 Critical and major defects. Each rocket catapult assembly shall be examined for critical and major defects specified in 4.5.2.2 and the applicable drawings. Any rocket catapult assembly found to contain a critical or major defect shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.5.4.2 Minor defects. Sample rocket catapult assemblies selected in accordance with 4.5.2.2b shall be examined for minor defects in accordance with the applicable drawings and 3.13. The acceptance quality level (AQL) shall be 2.5 defects per hundred units.

4.5.5 Tests. All test and performance requirements are classified as major characteristics. Sampling shall be as specified by 4.5.2.3.

4.5.5.1 Static firing test. Rocket catapults selected in accordance with 4.5.2.3.1 shall be static fired as the Naval Ordnance Station, Indian Head, Maryland 20640 within 30 days after submission for acceptance of the rocket catapult lot. The sample catapult shall be subjected to the temperature conditions specified in TABLE V for a minimum of 8 hours and static fired within 10 minutes after removal from the conditioning chamber.

4.5.5.1.1 Method of testing. The rocket catapult shall be initiated by an M3A1 Initiator or simulated method to verify compliance with 3.4 and TABLES I and II. The head of the rocket catapult shall be positioned horizontally with the head statically supported and the 459 lbm mass attached to the mounting lugs and permitted to move freely. Performance of the booster section shall be obtained using a minimum 25 KHz accelerometer mounted on the mass. Minimum equipment accessories shall be as shown in TABLE VI. Failure of any rocket catapult assembly to comply with the requirements of 3.4, TABLES I and II shall result in rejection of the lot.

TABLE V. Temperature conditioning sample plan.

Temperature	Sample Size
-65° to 70°F	7
65° to 70°F	7
160° to 165°F	7

TABLE VI. Test equipment accuracies.

Requirement	Equipment accuracy
Maximum thrust	±2.0 percent
Time	±.001 second
Maximum acceleration	±5.0 percent

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

4.5.5.1.2 Post static-firing disassembly. A post static-firing disassembly and inspection shall be conducted on all first article and lot acceptance test units. Detailed observations on conditions, including marginal conditions of individual components shall be noted. All findings shall be evaluated against the requirements of 3.4.4. When specified in the contract or order (see 6.2), a disassembly findings report shall be submitted to the procuring activity.

4.5.5.2 Radiographic inspection. Rocket catapults shall be radiographically inspected in accordance with MIL-STD-453, radiographic quality level 1. Any deficiency shall be cause for rejection of the unit. Radiographs shall be capable of detecting defects and rocket catapult components 0.03 inch in length or width, whichever is smaller. If all components cannot be shown using standard radiographic techniques, neutron radiography shall be employed to show these components. When specified in the contract (see 6.2), all radiographs taken of the rocket catapult assembly or components thereof shall be forwarded to the activity designated by the procuring activity. Otherwise, all radiographs shall be inspected on-site by a designated Government representative. Acceptance of the loaded rocket catapult lot shall be subject to approval of the radiographs by the designated Government activity.

4.5.5.3 Breakaway torque. After ascertaining that each component specified in TABLE I has been seated with 400 + 50, -0 inch-pounds of torque, a breakaway torque of 200 inch-pounds shall be applied. Any evidence of loosening or deformation of any component shall result in rejection of the catapult assembly.

4.5.5.4 Residual magnetism. Each catapult assembly shall be slowly passed 6 inches in front of an MS 17983 compass along the entire length of the catapult in accordance with FIGURE I. If the compass indicator deflects more than 5° in either direction, the catapult assembly shall be rejected. The test shall be performed in an area free from local magnetic effects.

4.5.5.5 Nozzle O-ring integrity. The retainer-nozzle ball O-ring shall be tested for leakage by partially assembling the catapult so that the retainer-nozzle subassembly and motor tube are assembled. The assembly shall then be pressurized to 40 psig and the nozzle swiveled though its operational range. Any loss of pressure within 15 seconds after nozzle has been fully swiveled shall result in rejection of the catapult assembly.

4.5.5.5.6 Release O-ring integrity. The release O-rings shall be tested for leakage by pressurizing the launcher tube-mount subassembly with nitrogen at 200±5 psig. Any loss of pressure within 15 seconds of pressurization shall result in rejection of the catapult assembly.

4.6 Packaging inspection. The packaging, packing, and marking shall be inspected to verify conformance with the requirements of section 5.

5. PACKAGING

5.1 Preservation, packaging, packing and marking. Unless otherwise specified in the contract (see 6.2), preservation, packaging, packing, and marking shall be in accordance with dwg 5184318.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The CKU-7/A rocket catapult assembly is intended to be used to propel an aircraft ejection seat and its occupant safely out and away from a jet aircraft.

6.2 Ordering data. Procurement documents should specify the following:

6.2.1 Procurement requirements.

a. Title, number, and date of this specification.

b. Inspection conditions if other than specified (see 4.3).

c. Quantity required (exclusive of first article and static firing test samples) (see 4.4 and 4.5.2.3.1).

d. When a first article sample is not required (see 3.1, 4.4, and 6.5).

e. Assigned activity for first article inspection and static firing tests (see 4.4, 4.4.2, 4.5.2.3.1, 4.5.5.1 and 6.6).

f. Whether test reports are required (4.5.1).

g. If radiographs are to be forwarded (4.5.5.2).

h. Packaging requirements if other than level A (see 5.1).

i. Safety precautions (see 6.7).

j. Disposition of hardware, scrap propellant and metal parts (see 6.8).

k. That the contractor retain radiographs on file (see 6.9).

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL) the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DAR 7-104.9(n) (2) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs.

Paragraph No.	Data requirement title	Applicable DID No.	Option
4.5.1	Reports, Test	DI-T-2072	-

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L, Vol. III, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

6.2.3 First article. When a first article inspection is required, the item will be tested and should be a first article sample. The first article should consist of 21 units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, test approval of the documents first article.

6.3 Description of data. The following paragraphs are a description of data to be included in test reports per 4.5.1 when specified in the contract or order (see 6.2.2).

6.3.1 Propellant description. The following propellant information should be submitted with each production lot. The materials and components of each propellant batch should be listed with the manufacturer, lot number, and date of manufacture. The burning rates of 2500, 5000, and 7500 psi performed at -65°, 70° and 165°F for each pressure (three samples at each temperature and pressure per mix). The results of tensile strength and elongation tests at -65°, 70° and 165°F with a pull rate of 2 inches/minute (three samples at each temperature per mix), heat explosion (3 samples per mix). Verification that ingredients were properly weighed and added to each mix (mix sheet(s)).

6.3.2 Static firing performance tests. All computations and data required for ballistics evaluation, generated during quality conformace inspection static firings per 4.5.5.1 should be reported together with firing traces and the following information:

a. Grain designation, manufacturer, lot number, and date of propellant manufacture

b. Type of test equipment

c. Deviations from standard testing procedures

d. Additional comments (malfunctions, unusual occurrences)

e. Disassembly findings report (see 4.5.5.1.2)

6.3.3 Summary sheet. A summary of the results of the tests for the parameters listed in TABLE I should be submitted to the designated Government activity for each inspection lot. The summary should include the sample size, number and nature of defects found, and the disposition (accepted or rejected).

6.3.4 Data cards. Data cards (DD form 1650) should be completed for each loaded rocket catapult lot. Copies should be provided in accordance with contract requirements and one copy should be forwarded to the Commanding Officer, Naval Ordnance Station, Indian Head, MD 20640 (code 5122).

6.3.5 Propellant/assembly production records. The contractor should prepare and retain, for the service life of the unit propellant, production records including batch number, mix designation, rocket motor lot number, rocket motor serial number, cartridge lot number, and cartridge serial number. These should be cross referenced to the assembled rocket lot number and to specific rocket catapult serial numbers.

6.4 Definitions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

6.4.1 Mechanical failure. A "mechanical failure" is defined as any deformation or breakage of a part, the occurrence of which is other than a design function.

6.4.2 Booster ignition delay. "Booster ignition delay" is defined as the time that elapses between the firing of the catapult primer (T_0) and the beginning of the continuous rise (T_1) on the booster thrust-time record (see FIGURE 2).

6.4.3 Launch time. "Launch time" is defined as the time between the beginning of the continuous rise (T_1) and sudden drop (T_2) on the booster thrust-time record (see FIGURE 2).

6.4.4 Separation velocity. "Separation velocity" is defined as the average velocity of the simulated ejected mass propelled horizontally at catapult separation measured over the interval from separation to 12 inches after separation.

6.4.5 Rate of change of acceleration. "Rate of change of acceleration" is defined as the maximum positive slope of the acceleration time record measured over any 30 milliseconds (ms) between the beginning of the continuous rise and the maximum acceleration on the acceleration time record (see FIGURE 2).

6.4.6 Rocekt ignition delay. "Rocket ignition delay" is defined as the time between the sudden drop (T_2) on the booster-thrust-time record and the point at which the thrust on the rocket axial thrust record reached 10% of its maximum value (T_3) (see FIGURE 2).

6.4.7 Action time. "Action time" is defined as the time between the points where the rocket axial thrust reaches 10% of its maximum value at the start of burning (T_3) and falls below 10% of the maximum value at the end of burning (T_4) (see FIGURE 2).

6.4.8 Rocket motor resultant thrust. The rocket motor resultant thrust is obtained by vectorially adding the two maximum axial and normal components of rocket thrust that occur at one time.

6.4.9 Thrust-time integral. "Thrust-time integral" is defined as the integral of the area under the rocket thrust-time bounded by the action time limits (T_3) to (T_4) (see FIGURE 2).

6.4.10 Rocket resultant impulse. "Rocket resultant impulse" is defined as the resultant of the integrals of the areas under the rocket axial thrust-time and normal thrust-time records bounded by the action time limits (see FIGURE 2).

6.4.11 Propellant batch. A propellant batch is a mix in which each ingredient is composed entirely of one homogeneous lot.

6.4.12 Rocket catapult lot. A rocket catapult lot is a group of units composed of one or more rocket motor propellant batches, one lot of metal parts, and one lot of catapult cartridges.

6.5 First article sample waiver. First article samples submitted and approved on a recent contract (a contract remaining in production or a contract out of production for less than one year) may be accepted by the procuring activity in

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

lieu of an additional first article inspection. When the first article sample is waived (see 6.32.1.(c)), the procurement document should contain a statement specifying that the standards of workmanship exhibited by the previously approved first article sample shall determine the minimum requirements of the current contract or order.

6.6 Test facility for first article inspection. The Naval Ordnance Station, Indian Head, Maryland is the Design Agent for the product covered by this specification. As such they are equipped to perform the first article inspection and static firing tests specified herein. Except when special conditions warrant otherwise, the Naval Ordnance Station, Indian Head, Maryland should be designated as the test facility for the first article inspection and the static firing tests (see 6.2.1.(d)).

6.7 Safety precautions. The safety precaution requirement of the "Contractors' Safety Manual for Ammunition, Explosives, and Related Dangerous Material" (DOD 4145.26M) are applicable and should be specified in the contract or order as required by the Armed Services Procurement Regulations (ASPR) 1-323.

NOTE: When this specification is used as part of the description of work to be accomplished by a Government activity, the safety precaution requirements of "Ammunition and Explosives Ashore" (OP 5) should be made applicable.

6.7.1 Explosive hazard classification. The explosive hazard classification for this rocket catapult has been designated as:

Explosive Hazard Classification - Class 2

Storage Compatibility Group - Group J

Department of Transportation (DOT) Hazard Class - C1 B

DOT Marking - Propellant Explosive

6.8 Disposition of hardware, scrap propellant, and metal parts. The contract should specifiy that all items purchased become the property of the U.S. Government; no hardware, propellant, or metal parts acceptable, scrapped, or tested be disposed of without authorization of the procuring activity; all items be made available to the procuring activity upon request; and that the disposal of any tested hardware, propellant, or metal parts without authorization by the procuring activity will result in the test being declared invalid, and a retest will be required.


6.9 Retention of radiographs. The contract should specify that all radiographs of accepted lots of rocket catapults be retained on file by the contractor for 8 years or 1 year past the service life of the unit, whichever is longer.

6.10 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to previous issue due to the extensiveness of the changes.

Custodian:
Navy - OS
Air Force - 99

Preparing Activity
Navy - OS
Project No. 1377-0748

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

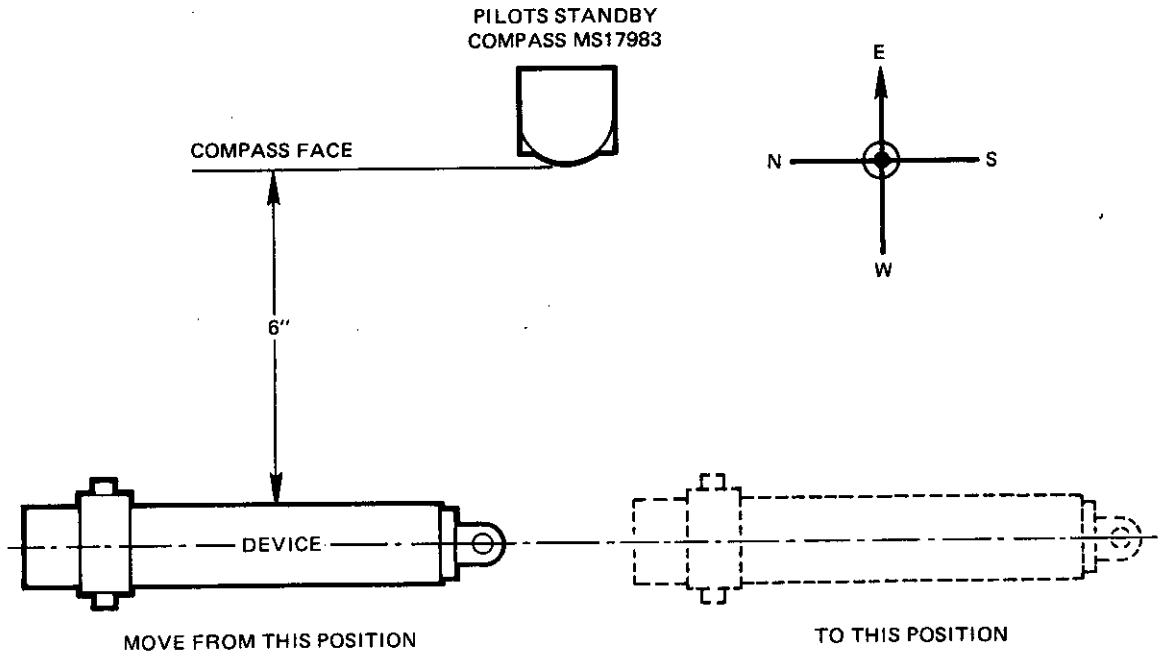

PLAN VIEW

FIGURE 1. LAYOUT FOR DETERMINATION OF RESIDUAL MAGNETISM IN DEVICE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

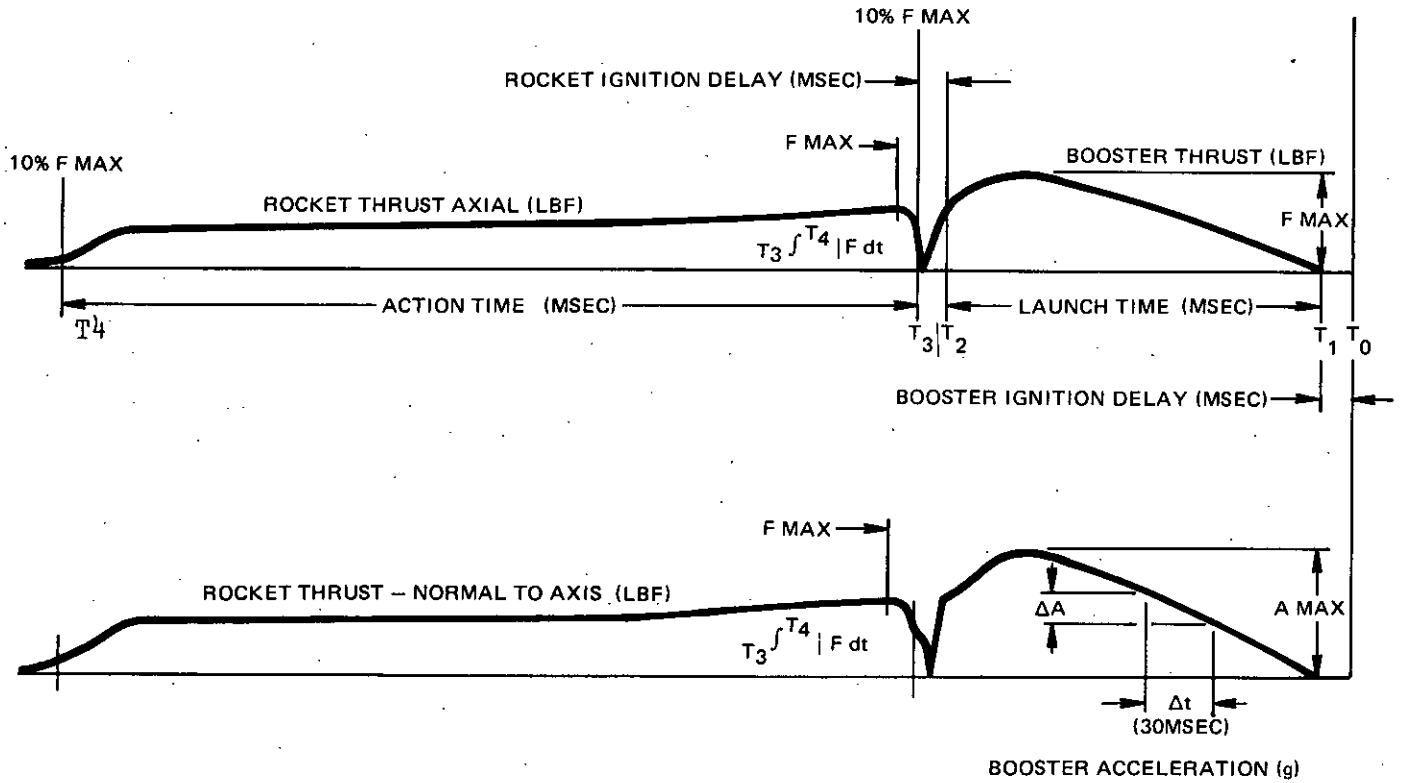


FIGURE 2. PERFORMANCE CURVE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a *continuing effort* to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Ordnance Station
Standardization/Documentation Div. (524)
Indian Head, MD 20640 - 5000

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Ordnance Station
Standardization/Documentation Div. (524)
Indian Head, MD 20640-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-48568A	Catapult, Aircraft Ejection Seat: CKU-7/A Assembly

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.