INCH-POUND

MIL-I-82787(OS)
5 February 1990
SUPERSEDING
WS 20616
25 October 1983

MILITARY SPECIFICATION

IGNITER ASSEMBLY, ROCKET MOTOR MK 104

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 **Scope.** This specification establishes the performance, design, test, manufacture, and acceptance requirements for the Mark 104 Rocket Motor Igniter Assembly referred to herein as the igniter.

2. APPLICABLE DOCUMENTS

2.1 **Government documents.**

2.1.1 **Specifications, standards and handbooks.** The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Ordnance Station, Standardization Branch (3730), Indian Head, MD 20640-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1340

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-F-7179	Finishes, Coatings, and Sealants for the Protection of Aerospace Weapons Systems
MIL-E-8189	Electronic Equipment, Missiles, Boosters and Allied Vehicles, General Specification for
MIL-D-23660	Data, Technical for Rocket Motors
MIL-H-46855	Human Engineering Requirements for Military Systems, Equipment and Facilities
MIL-A-82802	Adhesive and Sealant

STANDARDS

FEDERAL

FED-STD-313	Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-331	Fuze and Fuze Components, Environmental and Performance Tests for
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-889	Dissimilar Metals
MIL-STD-965	Parts Control Program
MIL-STD-970	Standards and Specifications, Order of Preference for the Selection of
MIL-STD-1472	Human Engineering Design Criteria for Military Systems, Equipment and Facilities
MIL-STD-1695	Environments, Working, Minimum Standards for

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

HANDBOOKS

MILITARY

MIL-HDBK-5 Metallic Materials and Elements for Aerospace Vehicle Structures

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from: Military Specifications and Standards, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 **Other Government documents, drawings, and publications.** The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

NAVAL SEA SYSTEMS COMMAND (CAGE Code 10001)

WR-43 Preparation of Quality Assurance Provisions (Including Classification of Characteristics)

(Copies of WR-43 are available from the Commanding Officer, Naval Publications and Forms Center, Attn: 1053, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

NAVAL SEA SYSTEMS COMMAND (CAGE Code 53711)

5334163 Igniter Assembly, MK 104

(Application for copies of drawings should be addressed to the Commanding Officer, Naval Ordnance Station, (Attn: Code 3720), Indian Head, MD 20640-5000.)

CODE OF FEDERAL REGULATIONS (CFR)

49 CFR 100-199 Transportation

(Application for copies of CFRs should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402-0001.)

2.2 **Non-Government publications.** The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

MORTON THIOKOL INC., WASATCH DIVISION

2U121644 Igniter Test Chamber

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to Morton Thiokol Inc., Wasatch Division, P.O. Box 524, Brigham City, UT 84302.)

AMERICAN TRUCKING ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Attn: Traffic Dept., 2200 Mill Road, Alexandria, VA 22314-4677.)

NATIONAL RAILROAD FREIGHT COMMITTEE

Uniform Freight Classification (UFC) 6000

(Application for copies should be addressed to the National Railroad Freight Committee, 222 South Riverside Plaza, Suite 1120, Chicago, IL 60606-5945.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 **Order of precedence.** In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 **First article.** When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.4).

3.2 **Igniter.** The igniter assembly, specified herein and in drawing 5334163, shall consist of explosive leads and a plastic case and cap containing the igniter pyrotechnic charge.

3.3 **Performance characteristics.**

3.3.1 **Ignition.** Upon initiation of an Arming Firing Device (A/FD) (or equivalent), the explosive leads shall be initiated, propagate to the igniter case, and ignite the pyrotechnic powder within the case. The output, measured from the A/FD end of the test assembly shown on figure 1, shall produce a pressure-time integral of 1.5 $\pm$ 0.5 pounds per square inch gage (psig)-seconds within 0.040 second after application of the firing current.

3.3.1.1 **Operating temperature.** The igniter shall perform as specified in 3.3.1 when initiated at any temperature between 45 degrees Fahrenheit (°F) and 95°F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

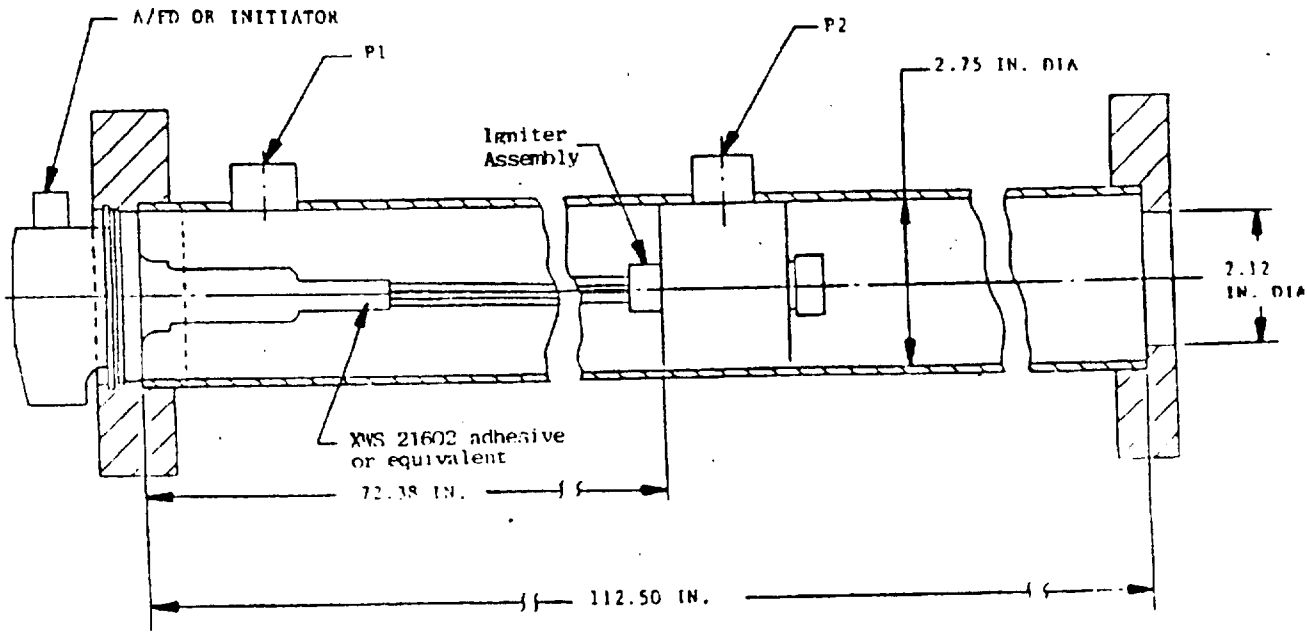


FIGURE 1. A/FD - Igniter assembly test configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

3.4 **Physical characteristics.**

3.4.1 **Dimensions.** The igniter shall comply with the requirements of the applicable drawing. All other design features shall be consistent with accepted design practice for explosive leads and pyrotechnic materials.

3.4.2 **Structural integrity.** The igniter shall withstand a pull test as defined on drawing 5334163.

3.4.3 **Leakage.** There shall be no visibly detectable leakage when the igniter is leak tested in accordance with drawing 5334163.

3.4.4 **Pressure integrity.** The igniter shall withstand a 21 to 23 psig external pressure test for 15 to 17 minutes without rendering the igniter unsuitable for the end use. Cracks in the igniter case shall be cause for rejection.

3.5 **Reliability.** The igniter shall meet the performance requirements specified herein following the environmental conditions of 3.7, with a reliability goal of 0.998 at a 90 percent (%) confidence level. Performance data resulting from the testing of first article units, lot acceptance units, and motor tests shall be used for actual reliability determination which shall be updated periodically.

3.6 **Maintainability.** The igniter shall not require maintenance, repair, or component replacement during the shelf life.

3.7 **Environmental conditions.** The igniter shall perform as specified herein after exposure to the nonoperating environments specified below.

3.7.1 **Temperature and humidity.** The igniter shall perform as specified herein after exposure to temperature cycling from -20 to 130°F at a relative humidity of 95%, minimum, for 28 days.

3.7.2 **Shelf life.** The shelf life of the igniter shall be 10 years after date of manufacture when stored in the original, sealed container at any temperature between -20 and 130°F and a maximum relative humidity of 95%.

3.8 **Igniter transportability.** The igniter shall be designed to be transported in a packaged condition by any appropriate transportation method available for military materials and in accordance with 49 CFR 170-179.

3.9 **Design and construction.**

3.9.1 **Materials, processes and parts.** Materials, processes, and parts shall be selected with attention being given to the environmental requirements specified herein. Materials and parts shall be selected for lightweight construction and simplicity of manufacture commensurate with the design. Unless necessary for the design application, critical and strategic materials shall not

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

be used. Proprietary materials and processes shall not be used without prior written approval.

3.9.1.1 **Selection of specifications and standards.** The selection of specifications and standards for materials, processes, and parts for use in the design shall be in accordance with MIL-STD-970 and approved for use by the contracting activity. In addition to the use of MIL-STD-970 for the selection of specifications and standards, the contractor shall make use of existing specifications and standards, contained in the Government inventory, if applicable to the design. The number of different types and sizes of hardware shall be kept to the minimum practicable. All specifications and standards for materials, parts, equipment, and services other than established and approved for use in the aforementioned documents shall require approval by the contracting activity prior to incorporation into the design. Nonstandard materials, processes, and parts selected for use shall be equivalent to, or better than, similar standard materials, processes and parts. Request for approval of nonstandard parts shall be in accordance with MIL-STD-965.

3.9.2 **Materials.** Materials shall be in accordance with existing Government specifications. For materials not defined by Government specifications, the requirements of MIL-D-23660 shall apply.

3.9.2.1 **Moisture and fungus resistance.** Materials shall be resistant to the corrosive action of salt air and damage from moisture and fungus in accordance with MIL-E-8189. Protective coatings shall be acceptable as moisture, fungus, and corrosion preventatives on parts which will not lose the coating during the normal course of inspection, operation, maintenance, and periodic test.

3.9.2.2 **Metals.** The properties of metals shall be in accordance with MIL-HDBK-5.

3.9.2.2.1 **Dissimilar metals.** The igniter assembly to A/FD interface shall be designed for maximum corrosion resistance. Where dissimilar metals, as defined in MIL-STD-889 must be used, the metals shall be protected in accordance with MIL-F-7179.

3.9.2.3 **Plastics.** The use of plastics within the igniter shall be limited to materials which will not outgas corrosively, creep under the applied load, nor crack due to aging.

3.9.3 **Identification and marking.** Product marking shall be in accordance with MIL-STD-130.

3.9.4 **Interchangeability.** Mechanical interchangeability shall exist between similar assemblies or subassemblies. Interchangeability requires the substitution of similar parts without physical modification to any part of the component.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

3.9.5 **Safety**. The following note shall be heeded:

CAUTION

The assembly is a class C explosive as defined in 49 CFR. Proper precautions should be taken to avoid excessive heat, shock, and electrical currents.

3.9.5.1 **Autoignition**. The igniter shall not ignite when exposed to 350 to 360°F for 2 hours minimum. Melting of components shall not be considered ignition.

3.9.5.2 **Toxic products and formulations**. The material shall have no adverse effect on the health of personnel when used for its intended purpose. Questions pertinent to this effect shall be referred by the contracting activity to the appropriate departmental medical service who will act as an advisor to the contracting agency (see 4.1.2)

3.9.5.3 **Material Safety Data Sheet (MSDS)**. The contractor shall prepare and submit a MSDS in accordance with FED-STD-313 as specified in the contract (see 6.2).

3.9.6 **Human performance/human engineering**. The igniter shall comply with the human engineering principles specified in MIL-H-46855 and MIL-STD-1472. Particular attention shall be given to the following areas:

a. Safety.

b. Access to pyrotechnic and mechanical equipment.

c. Analysis of human procedures with designated manned position requirements to assure human performance limitations are not exceeded.

d. The number of personnel and skill level required for interface equipment maintenance, handling, and loading procedures including analysis of unique calibration, alignment, and test procedures.

3.10 **Workmanship**. Workmanship during manufacture of the igniter shall meet the requirements of MIL-STD-454. The requirement for first-class workmanship shall not be limited solely to the preceding standard and shall not preclude the use of time and labor saving techniques, provided that reliability and safety shall in no way be jeopardized. All subassembly parts and the assembled item shall be thoroughly cleaned of any visible foreign matter.

3.10.1 **Facilities and working environment**. The contractor shall provide adequate facilities for the fabrication, assembly, testing, and inspection of the igniter which shall be in compliance with the provisions of the contract or purchase order. Unless otherwise specified in the contract or purchase order,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

as a minimum, the working environment shall meet the levels and requirements specified in MIL-STD-1695.

3.11 **First article sample.** Unless otherwise specified in the contract or purchase order (see 6.2), first article samples shall be delivered to the testing activity designated in the contract or purchase order for first article testing. The first article sample shall be manufactured using the same methods, materials, processes, and procedures proposed for production. Any production prior to acceptance of the first article sample is at the risk of the contractor.

4. QUALITY ASSURANCE PROVISIONS

4.1 **Responsibility for inspections.** Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 **Responsibility for compliance.** All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, not does it commit the Government to accept defective material.

4.1.2 **Toxicological product formulations.** The contractor shall have the toxicological product formulations and associated information available for review by the contracting activity to evaluate the safety of the material for the proposed use.

4.2 **Classification of inspections.** The inspection requirements specified herein shall be classified as follows:

a. First article inspection (see 4.4 and 4.4.1).

b. Quality conformance inspection (see 4.5).

4.3 **Test conditions.** Unless otherwise specified, all tests shall be conducted at 80 ± 20°F temperature, 10 to 95% relative humidity, and 24 to 30 inches of mercury barometric pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

4.4 **First article inspection.** First article inspection shall consist of the examinations and tests specified in table I performed in the order shown on eleven (11) igniters which are representative of the production design. Failure to meet all of the requirements specified herein shall be cause for rejection of the first article sample.

TABLE I. First article inspection.

Examinations and Tests	Requirement	Method	Number of First Article Units			
			3	3	4	1
Dimensions	3.4.1	4.6.2.1	X	X	X	X
Workmanship	3.10	4.6.6	X	X	X	X
Human performance/human engineering	3.9.6	4.6.8				X
Structural integrity	3.4.2	4.6 2.2	X	X	X	X
Leakage	3.4.3	4.6.2.3	X	X	X	X
Pressure integrity	3.4.4	4.6.2.4	X	X	X	X
Temperature and humidity	3.7.1	4.6.5	X	X	X	
Structural integrity	3.4.2	4.6.2.2	X	X	X	
Pressure integrity	3.4.4	4.6.2.4	X	X	X	
Ignition at operating temperature	3.3.1 and 3.3.1.1	4.6.1				
a. High temperature			X			
b. Ambient temperature				X		
c. Low temperature					X	
Autoignition	3 9 5 1	4.6.7				X
Reliability	3.5	4.6.3	X	X	X	X

4.4.1 **First article inspection with variable sample size.** When specified in the contract or purchase order (see 6.2), first article inspection shall consist of the examinations and tests specified in table I performed in the order shown on the number of igniters specified by the contracting activity.

4.5 **Quality conformance inspection.** Quality conformance inspection shall consist of the examinations and tests specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. Quality conformance inspection.

Examinations and Tests	Requirement	Method
Individual		
Dimensions	3.4.1	4.6.2.1
Workmanship	3.10	4.6.6
Structural integrity	3.4.2	4.6.2.2
Leakage	3.4.3	4.6.2.3
Packaging	Section 5	4.7
Sample		
Pressure integrity	3.4.4	4.6.2.4
Ignition	3.3.1	4.6.1

4.5.1 Lot. A lot shall consist of all the igniters produced during a time period of not more than 3 months, containing the same lots of pyrotechnic materials, plastic cases and caps, made with the same parts, processes, and procedures, and offered to the procuring activity for acceptance at one time.

4.5.2 Sampling. Igniter lot sampling for quality conformance inspection shall be in accordance with table III.

TABLE III. Sampling.

Lot size	Number of samples
4 - 30	3
31 - 40	4
41 - 50	5
51 - 60	6
61 - 70	7
71 - 80	8
81 - 90	9
91 - 200	10

4.5.3 Classification of characteristics. The characteristics verified by the tests and examinations herein are classified as Critical, Major or Minor in accordance with WR-43. Tests and examinations that verify critical characteristics shall be identified by the symbol (C), and major characteristics shall be identified by the symbol (M). The number following the classification symbol

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

indicates the serial number of the test or examination. When the classification does not apply to the complete paragraph, the portion to which the classification is applicable is enclosed in brackets. Tests and examinations which are not annotated with a classification code shall be classified minor.

4.6 **Test methods.**

4.6.1 **Ignition.** (M101) The igniter shall be initiated while contained in a test chamber conforming to drawing 2U121644.. A pressure-time curve shall be generated by monitoring the pressure output at the A/FD end of the assembly, and the resulting curve shall be integrated from 0.000 to 0.040 second. After firing, each lot acceptance sample igniter shall be visually examined to verify that both explosive leads propagated, as evidenced by the splitting of some portion of the explosive leads contained in the igniter case.

4.6.2 **Physical characteristics.**

4.6.2.1 **Dimensions.** The igniter shall be visually examined to verify conformance to 3.4.1.

4.6.2.2 **Structural integrity.** The igniter shall be subjected to the pull test specified on the applicable drawing to verify conformance to 3.4.2.

4.6.2.3 **Leakage.** The igniter shall be leak tested as specified on the applicable drawing to verify conformance to 3.4.3.

4.6.2.4 **Pressure integrity.** The igniter foam retainer shall be compressed and installed in a sleeve 2.75 $\pm$ 0.10 inches inside diameter by 2.25 $\pm$ 0.25 inches long, then the igniter shall be subjected to an external pressure of 21 to 23 psig for 15 to 17 minutes. Pressurization and depressurization shall occur in 30 to 60 seconds.

4.6.3 **Reliability.** An analysis shall be performed periodically, and the results shall be submitted to the contracting activity (see 6.3). Performance data resulting from the testing of igniter first article units, lot acceptance units, and motor tests shall be used for determining actual reliability.

4.6.4 **Maintainability.** Maintainability shall be determined by examining the applicable engineering drawing.

4.6.5 **Temperature and humidity.** The igniter shall be subjected to MIL-STD-331, Test 105.1, Two Chamber Method except the temperature range shall be -20°F to 130°F.

4.6.6 **Design and construction.** The igniters shall be visually examined and the applicable engineering drawings and processes shall be checked to verify conformance to 3.9.1, 3.9.1.1, 3.9.2, 3.9.3, and 3.10.

4.6.7 **Autoignition.** (M102) The igniter shall be heated in an oven for not less than 2 hours at 350 to 360°F to verify conformance to 3.9.5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

4.6.8 **Human performance/human engineering.** A demonstration of the igniter assembly procedure shall be performed with careful attention being paid to the areas of concern mentioned in 3.9.6.

4.7 **Inspection of packaging.** The igniter containers and container markings shall be visually examined for compliance with section 5.

5. PACKAGING

5.1 **Packaging.** Unless otherwise specified in the contract or order (see 6.2), packaging shall be level C as specified herein.

5.1.1 **Level C.** The igniters shall be packaged to afford adequate protection against loss, contamination, deterioration, and damage during shipment from the supply source to the first receiving activity. Containers in the same shipment shall be of the same size. The packaging shall conform to UFC 6000, National Motor Freight Classification, 49 CFR 171-178, or to other carrier rules and regulations as applicable to the mode of transportation.

5.2 **Marking.**

5.2.1 **Standard marking.** In addition to any special marking required by the contract or order (see 6.2), interior and exterior containers shall be marked in accordance with MIL-STD-129.

5.2.2 **Special marking.** In addition to the marking requirements of 5.2.1, each container shall include the following:

a. Manufacturer's identification, lot number and item name.

b. Date of manufacture.

c. Net weight of contents.

d. Storage and shipment temperatures as follows:

"Storage and shipment temperatures shall be maintained between -20 and 130°F. The maximum relative humidity shall be 95 percent."

e. The number of igniters contained within.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The igniter specified herein is intended for use in the Standard Missile Mk 104 Dual Thrust Rocket Motor to ignite the rocket motor propellant.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1, 2.1.2 and 2.2).

c. Whether first article inspection is required (see 3.1).

d. Where first article samples are to be delivered (see 3.11).

e. Material Safety Data Sheets (see 3.9.5.3 and 6.5).

f. Packaging if other than as specified in 5.1.

g. Special marking if other than as specified in 5.2.2.

6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DID's) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/ provided and that the DID's are tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FOR Supplement 27-475-1 exempts the requirement for a DD Form 1423.

Reference paragraph	DID Number	DID Title
4.6.3	DI-T-2072	Test Reports

The above DID was cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control list (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

6.4 First article. When a first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, a standard production item from the contractor's current inventory (see 3.11), and the number of items to be tested as specified in 4.4. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.5 Material Safety Data Sheets. MSDS requirements are applicable to this specification and should be specified in the contract as required by the Federal Acquisition Regulation (FAR) Part 23, Subpart 23.3. Contracting officers will identify those activities requiring copies of completed MSDSs prepared in accordance with FED-STD-313. The pertinent Government mailing addresses for submission of data are listed in FED-STD-313.

6.6 Subject term (key word) listing.

Rocket Motor, Dual Thrust, Mk 104
Standard Missile

Preparing Activity:
NAVY-OS
(Project 1340-N794)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-I-82787	2. DOCUMENT DATE (YYMMDD) 5 February 1990

3. DOCUMENT TITLE
IGNITER ASSEMBLY, ROCKET MOTOR, MK 104

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY NAVAL ORDNANCE STATION (CODE 3730) INDIAN HEAD, MD 20640-5000

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON
c. ADDRESS (Include Zip Code)	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289 2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23107:252
Check the source to verify that this is the current version before use.