MILITARY SPECIFICATION

FOR

TEST SET, RADIO, AN/PRM-34

This specification is approved for use by USA Communications Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Communications-Electronics Command, ATTN: AMSEL-ED-TO, Fort Monmouth, New Jersey 07703 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This specification establishes the requirements for manufacture and acceptance of the Test Set, Radio, AN/PRM-34.

1.2 Where mentioned herein, Test Set refers to the TS-3951 unit. Transit case refers to the B4029277 assembly. The term equipment refers to the AN/PRM-34 part number B4029255.

2. APPLICABLE DOCUMENTS

2.1 Issue of Document In the event of conflict between requirements expressed in applicable documents and portions of this specification, this specification shall take precedence.

SPECIFICATIONS

Military

MIL-E-55585	Electronic Equipment & Parts, Packaging of
MIL-F-14072	Finish for Ground Signal Equipment
MIL-M-13231	Marking of Electronic Items
MIL-I-45208	Inspection System Requirements
MIL-I-46058	Insulating Compound, Electrical (For Coating Printed Circuit Assemblies)
MIL-P-116	Preservation-Packaging, Methods of
MIL-P-11268	Parts, Materials, and Process Used In Electronic Equipment

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attribution
MIL-STD-108	Definitions of and Basic Requirements for Enclosures for Electctric and Electronic Equipment
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-252	Wired Equipment Classification of Visual and Mechanical Defects
MIL-STD-454	Standard General Requirements for Electronic Equipment.
MIL-STD-726	Packaging Requirements Code
MIL-STD-781	Reliability Desigr Qualifications and Production Acceptance Test: Exponential Distribution
MIL-STD-810	Environmental Test Methods
MIL-STD-129	Marking

DRAWINGS

Electronics Command

DL B4029255

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First-Article When Specified in the contract or purchase order; the contractor shall furnish first article units in accordance with 4.3.

3.2 Construction The equipment shall be constructed in accordance with the following drawings and the requirements of this specification.

DL B4029255

3.3 Parts, Materials and processes - general In addition to the requirements of this specification, the requirements of MIL-P-11268, including the selection requirements therein, shall apply (see 4.10).

3.3.1 Cables One RG-58 coaxial cable terminated with BNC type connectors shall be provided. The total length of the cable shall be 30 in. ± 1 in.

3.3.2 Adapters An antenna adapter shall be provided to allow BNC connection at the antenna port of the Radio Set AN/PRC-68.

3.3.3 Connectors All external connectors or the test set shall be of BNC type.

3.3 4 Case The test set shall be a rainproof aluminum case with a hinged cover.

3.3.5 Dimension

a. The overall dimension of the test set excluding handles, hinges, screws, and other extrusions shall not exceed the following.

D = 5.25"

H = 3.75"

W = 8.5"

b The overall dimension of the transit case excluding handles, hinges screws, and other extrusions shall not exceed the following.

D = 8.75"

H = 6.5"

W = 12.825"

3.3.6 Weight The total combined weight of the equipment shall not exceed 12 pounds.

3.3.7 Conformal Coating Printed circuit boards shall be conformally coated in accordance with MIL-I-46058 Type UR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

3.4 Systems Safety Engineering

3.4.1 Personnel Hazards Personnel hazards shall be kept to a minimum. The criteria of MIL-STD-454, Requirement 1, shall be made applicable for tasks and efforts such as the selection of parts, the complete manufacturing and assembly process, and any product baseline configuration changes that may be implemented during the course of the contract. Verification that compliance with this requirement has been achieved shall be through a visual inspection (see 4 10).

3.4.2 Edge Rounding Exposed Exposed edges shall be rounded to a minimum radius of 0.04 inch (1 mm), and exposed corners to a minimum of 0 5 inch (13 mm).

3.4.3 Radioactive Materials Radioactive materials shall not be used (e.g. luminous dials/markings, electron tubes, surge arrestors and lenses)

3.5 Marking

3.5.1 General Marking shall conform to Specification MIL-M-13231. Front panel marking of test set shall be Group II as described in that specification.

3.5.2 Visibility Wherever practicable, parts shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

3.5.3 Serial Numbers The Test Set shall be serial numbered on the TS-3951 name plate.

3 6 Finish, Protective Equipment shall be given protective finish in accordance with Specification MIL-F-14072. This includes finish of hard-ware, such as handles, hinges, screws, etc., and necessary touch up after assembly. The final paint film on Type I surfaces shall be per case drawing.

3.7 Technical Requirements

3 7.1 Frequency Measurements The equipment shall provide frequency measurement for the range of 30 to 80 MHz with 1 KHz resolution Measurement accuracy shall be ± 2 KHz with an input power level range of 1.0 to 50 watts (4.8.2).

3 7.2 Power Measurement

a. Forward Power The equipment shall be capable of measuring forward power from 1.0 to 50 watts continuously over the frequency range of 30.0 to 80.0 MHz without the need of a range switch. At room ambient temperature, accuracy shall be ± 20% from 1 0 to 2.0 watts, + 20%, -27% from 2.1 to 9.9 watts and ± 20% from 10.0 to 50.0 watts. At a temperature of + 50° C, accuracy shall be + 30%, - 20% at 1.0, 30.0, and 50.0 watts and ± 20% at 10.0 watts. At a temperature of - 20° C, accuracy shall be ± 20% at 1.0, 30.0 and 50.0 watts and + 20%, -30% at 10.0 watts (4.8.3a).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

b. Reverse Power The equipment shall be capable of measuring reverse power from 1.0 to 20.0 watts continuously over the frequency range of 30.0 to 80.0 MHz without the need of a range switch. At room ambient temperature, accuracy shall be ± 20% from 1.0 to 2.0 watts, + 20%, - 27% from 2.1 to 9.9 watts and ± 20% from 10.0 to 20.0 watts. At a temperature of + 50°C, accuracy shall be + 30%, - 20% at 1.0 and 20.0 watts and ± 20% at 10.0 watts. At a temperature of - 20°C, accuracy shall be ± 20% at 1.0 and 20.0 watts and + 20%, - 30% at 10.0 watts (4 8.3b).

3 7.3 Sensitivity/Squelch Measurement The equipment shall provide output signals for checking all relative receiver sensitivity and also be capable of checking tone squelch. The output signals shall be 3 u V ± 1 u V at room ambient temperature and 3 u V ± 1.5 u V at + 50°C and - 20°C. The Radio Test Set shall output a spectrum of frequencies from 30 MHz to 80 MHz spaced 5 MHz apart. This spectrum shall be modulated with a composite signal consisting of an audio tone of 900 Hz and a 150 Hz ± 2 Hz tone. The composite deviation at 75 MHz shall be 3.5 KHz minimum. Frequency stability of the output signals shall be ± 3 5 KHz (4.8.4).

3 7.4 Field Strength Indicator An antenna transient protection circuit shall be provided to protect against equipment burnout for a frequency of 30 MHz and a voltage of 100 volts peak for a period of 0 5 to 1 5 seconds Field Strengtn measurements shall range between 0 and 100 (4 8.5).

3 7 4.1 Internal Timer When the PUSH TO TEST buttor is depressed while the mode switch is in the FLD STR position, an internal timer shall hold the test set on such that the PUSH TO TEST button need not be held depressed The test set on time shall not be less than 30 seconds nor more than 120 seconds. If the mode switch is rotated out of the FLD STR position to any other mode, the test set shall turn off within 1 second (4.8.6).

3.7.5 Self - Test The equipment shall be capable of verifying its internal battery condition. Battery voltages from, and including 4.9VDC to 6 0VDC shall pass the self test At battery voltages between 4 9VDC and 4.5VDC, the test set display shall indicate a failed condition. At internal battery voltages less than 4.5VDC, the Test Set display shall be blank (4.8 7)

3 7 6 Power Consumption The maximum current drawn by the test set at a nominal battery voltage of 5.5 volts DC should be less than those shown in Table I (See 4.8.8).

TABLE I POWER CONSUMPTION

Switch Position	Current Drawn in Milliamperes
OFF CHK	420
SENS SQ	70
FREQ	500
FWD PWR	400
RVS PWR	400
FLD STR	335

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

3.8 Service Conditions The test set shall meet the following service conditions. Damage to the transit case shall not be considered failure of any tests unless such damage prevents opening or closing of the transit case to the extent that the TS-3951 cannot be carried in or removed from the transit case. Where electrical operation of the of the test set is required in conjunction with a service condition test, electrical measurements shall constitiute conformance to the requirements in each applicable service condition test specified below where the test set is required to "be operable without de-gradation in specified performance".

3.8.1 Equipment Duty Cycle For the equipment duty cycle, the unit shall be operated 5 minutes on and 5 minutes off in the self test mode.

3.8.2 Temperature The test set shall meet the specified performance characteristics throughout the range of - 20°C to + 50°C (see 4 9.1).

3.8.3 Altitude (Elevation) The test set shall meet the specified performance characteristics after it is tested as specified in 4 9.2 The transit case shall open and close (see Paragraph 3.8).

3.8.4 Leakage (Immersion) The transit case containing the test set and accessories shall be tested as specified in 4 9.6.

3.8.5 Vibration and Shock Tests for vibration (bounce, loose cargo) and shock (drop) shall be performed with the test set and accessories in its transit case. The transit case shall open and close as required in 3.8 without the recalibration, alignment, or adjustment. After completion of the specified tests the test set shall meet the requirements of 3.7.

3.8.5.1 Vibration (Bounce, Loose Cargo) After testing as specified in 4.9.3 the test set shall meet the requirements of 3 7

3.8.5 2 Shock, Bench Handling After testing as specified in 4.9 4 test set shall meet the requirements of 3.7

3.8 5.3 Shock, Drop After testing as specified in 4 9.5 the test set shall meet the requirements of 3 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

3.9 Burn-In The equipment shall be capable of meeting the requirements herein, without subsequent processing, after subjection to the burn-in of 4.7.

3.10 Interchangeability Like units, assemblies, subassemblies, and replaceable parts shall be physically and functionally interchangeable, without remodification of such items or of the equipment in accordance with MIL-STD-454, Requirement 7 (see 4.11). Individual items shall not be handpicked for fit or performance. Reliance shall not be placed on any unspecified dimensions, ratings, characteristics, etc. Electrical realignment of Wiring Board Assemblies B4029262 and B4029265 after installation in the TS-3951 Test Set is allowed in order to meet the requirements of paragraph 3.7.

3.11 Workmanship The equipment shall be manufactured and assembled in accordance with requirement 9 of MIL-STD-454 and applicable portions of MIL-STD-252 (see 4.10).

4. Quality Assurance Provisions

4.1 Responsibility for Inspection Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of Inspection Inspection shall be classified as follows:

4.2.1 First article inspection (does not include packaging) (see 4.3).

4.2.1.1 First article inspection of packaging (see 4.4).

4.2.2 Inspection covered by subsidiary documents (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

4.2.3 Quality conformance inspection.

4.2.3.1 Quality conformance inspection of equipment before packaging (see 4.6).

4.2.3.2 Quality conformance inspection of packaging (see 4.12).

4.3 First Article Unless otherwise specified in the contract or purchase order, the first article inspection shall be performed by the contractor.

4.3.1 First Article Units The contractor shall furnish four (4) first article units of the complete equipment including transit case.

4.3.2 First Article Inspection The first article inspection shall consist of inspections specified in Table II, and shall be performed in the order specified therein.

4.3.3 First Article Data The first article test plan and test report(s) shall be as required in the contract or purchase order.

4.4 First Article Inspection of Packaging Unless otherwise specified in the contract, First Article Inspection of Packaging shall be in accordance with the Unit Pack Design Validation Requirements of MIL-P-116.

4.5 Inspections Covered by Subsidiary Documents The following shall be inspected under the applicable documents as part of the inspection required by this specification and the inspection requirement specified in the contract or purchase order.

ITEM	PARAGRAPH WHERE REQUIRED
Parts, Materials and process-general	3.3
Marking	3.5
Finish	3.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

TABLE II
FIRST ARTICLE INSPECTION

INSPECTIONS	REQT PARA	TEST PARA	UNIT
Inspections covered by subsidiary documents	3.3, 3.5, 3.6	4.5	Inspections to be performed on all units
Burn-in	3.9	4.7	Inspections to be performed on all units
Group A Inspection	See Table III		Inspections to be performed on all units
Group B Inspection	See Table IV		Sample per MIL-STD-105
Environmental	3.8	4.9	
Temperature	3.8 2	4.9 1	Unit 1
Altitude	3.8 3	4.9 2	Unit 2
Vibration (bounce, loose cargo)	3.8.5.1	4.9.3	Unit 2
Shock, Bench Handling	3.8.5.2	4.9.4	Unit 3 & 4
Shock, Drop	3.8.5.3	4.9.5	Unit 3 & 4

NOTES:

a. Vibration (bounce, loose cargo), Shock, Drop and Altitude will be performed on the transit case (B4029277) with a TS-3951 Test Set and accessories inside

b. Temperature and Shock, Bench handling will be performed on the TS-3951 Test Set only.

c. Shock, Bench Handling shall be performed on units three (3) and four (4) prior to Shock, Drop. Two (2) units are permitted for the performance of Shock, Drop requirements (See MIL-STD-810).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

4.6 Quality Conformance Inspection of Equipment Before Packaging
The contractor shall perform the inspections specified in 4.5 through 4.7. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements.

4.6.1 Group A Inspection Each unit on contract or purchase order shall be inspected for conformance to the inspections specified in Table III. Discrete lots shall be formed from units that pass this inspection. Factors of lot composition not defined herein, or in the contract or purchase order, shall be in accordance with MIL-STD-105. Each lot shall be subject to sampling inspection, utilizing the procedures and the general inspection levels of MIL-STD-105, and the AQL's indicated in Table III.

4.6.1.1 Order of Inspection within Group A Group A inspection shall be performed as specified in Table III.

4.6.2 Group B Inspection Group B inspection shall be performed on samples selected from lots that have been subjected to and passed the Group A inspection. This inspection shall conform to Table IV and to the special inspection levels of MIL-STD-105, Table I.

4.6.2.1 Group B Sampling Plan The Group B AQL shall be 4 percent defective and the inspection level shall be S-4.

4.6.2.2 Order of Inspection within Group B Group B inspection shall be performed as specified in Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

TABLE III Group A Inspection

Inspection	Requirement Paragraph	Test Paragraph	AQL Major	AQL Minor
Visual & Mech	3.2, 3.2, 3.4.1., 3.11	4.10	4%	6.5%
Electrical	3.7	4.8	1%	*
Frequency	3.7.1	4.8 2	1%	*
Power	3.7.2	4.8.3	1%	*
** Sensitivity/Squelch	3.7.3	4.8.4	1%	*
Field Strength	3.7.4	4.8.5, 4.8.6	1%	*
Self Test	3.7.5	4 8.7	1%	*
Power Consumption	3.7.6	4.8.8	1%	*

* Defects in all characteristics other than visual and mechanical are considered major.

** Operational Test
Operational Test shall consist of Sensitivity Testing (paragraphs 3.7.3 and 4 8.4) at the selected frequencies of 30 MHz, 55 MHz and 80 MHz. Operational Testing shall be conducted on each unit prior to packaging and shipping. The test shall be conducted on units selected from lots that have passed Group A, B and C Testing.

TABLE IV Group B Inspection

Inspection	Requirement Paragraph	Test Paragraph	AQL
Interchangeability	3 10	4 11	4%
Immersion	3.8.4	4.9.6	4%

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

4.6.3 Group C Inspection Group C inspection shall be performed on units chosen from lots that have passed Group A & B inspection. The inspection shall consist of the inspections specified in Table V. Samples shall be selected in accordance with 4.6.3.1.

4.6.3.1 Sampling for Group C Inspection Four (4) samples of the complete equipment (test set and transit case) shall be selected at random and subjected to the tests specified in Table V. The samples shall be selected at the start of the contract from the first quality conformance inspection lot. These samples shall constitute the Group C requirement for the first 100 units produced

4.6.3.2 Thereafter, four (4) samples of the complete equipment (test set and transit case) shall be selected at random and subjected to the tests specified in Table V. These tests shall be performed once for each 500 units or fraction thereof produced.

4.6.3.3 Order of Inspection Within Group Group C inspection shall be performed in the order specified in Table V.

4.6.4 Reinspection of Conforming Group C Sample Units Unless otherwise specified, sample units which have been subjected to and passed Group B & C inspection may be accepted on the contract provided all damage is repaired and the sample units are resubjected to and pass Group A inspection.

4.7 Burn-In Each equipment submitted for acceptance under equipment duty cycle (see 3.8.1) shall be operated for a 24 hour period at a temperature of + 50 °C. A vibration of 2.2 g at any non-resonant frequency between 20 Hz and 60 Hz shall be applied to the equipment for 10 minutes every hour. The last 12 hours of Burn-In shall be failure free Prior to and after testing, the equipment shall meet full specification performance for the measurements specified in Table III.

TABLE V Group C Inspection

Inspection	Requirement Paragraph	Inspection Paragraph	Unit
Temperature	3.8.2	4.9.1	Unit I
Altitude	3.8.3	4.9.2	Unit II
Vibration	3.8.5.1	4.9.3	Unit II
Shock, Bench Handling	3.8.5.2	4.9.4	Unit III & IV
Shock, Drop	3.8.5.3	4.9.5	Unit III & IV

See Table II Notes

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

4.8 Electrical Performance Characteristics The Test Set, Radio, AN/PRM-34 shall be tested in accordance with the requirements of 3.7.

4.8.1 Standard Test Conditions All tests shall be conducted under the following conditions, except as specified for the individual tests:

a.	Temperature	25°C ± 2.5°C
b.	Humidity	25% RH ± 2.5% RH
c	Input Voltage Supply	5.5 VDC
d.	Load	50 ohm, 50 W
e.	RF Source	1 0 to 50 W, 30 to 80 MHz

4.8.2 Frequency Measurements Rotate mode switch to FREQ position and connect RF source to RADIO connector and 50 ohm load to ANT connector. Depress PUSH TO TEST button and note the display reading with RF source level set at 1.0 watt and frequency set at 30 MHz, 55 MHz, and 80 MHz. This test shall be repeated with the RF source level set at 20 and 50 watts. All frequency measurements shall comply with the requirements of 3 7.1.

4.8.3 Power Measurement

a. Forward Power Rotate mode switch to FWD PWR position and connect RF source to RADIO connector and 50 ohm load to ANT connector. Depress PUSH TO TEST switch and measure the forward output power over the frequency of 30 to 80 MHz in 5 MHz increments. All measurements shall comply with 3.7.2a.

b. Reverse Power Rotate mode switch to RVS PWR mode and repeat the test as outlined in 4 8.3a except for reversing the RADIO and ANT connections. All measurements shall comply with the requirements of 3.7.2b.

4.8.4 Sensitivity/Squelch Measurements Rotate mode switch to SENS SQ position. With no connection made to the ANT connector of the test set, depress the PUSH TO TEST switch and measure the output signal frequencies and spectrum levels at the Radio connection of the test set over the range of 30 to 80 MHz in 5 MHz increments Also measure the squelch tone frequency and composite deviation at 75 MHz. All measurements shall comply with 3.7.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

4.8.5 Field Strength Indicator Fabricate cable as shown in Figure 1. Rotate mode switch to FLD STR position and release the FLD STR ANT to its upright position. Connect the BNC male connector to the output of a signal generator set to 50 MHZ at +4 dBm. Connect the shielded alligator clip of the cable to ground (radio test set case or outer portion of RADIO or ANT connector). Connect center cable alligator clip to the FLD STR ANT immediately above the coiled spring. Depress the PUSH TO TEST button and note the display reading. All readings shall comply with the requirements of 3.7.4.

4.8.5.1 Antenna Transient Protection Circuit Connect the BNC connector of the cable (See Figure 1) to J2 of the Transient Measurement Adapter (See Figure 3). Release the FLD STR ANT to its upright position. Connect the shielded alligator clip of the fabricated cable to ground (radio test set case or outer portion of RADIO or ANT connector). Connect center cable alligator clip to the FLD STR ANT immediately above the coiled spring base. Connect the high voltage probe of the VTVM to TP1. Connect the common probe to TP2 Connect the other equipment as shown in Fig. 2. Adjust the output of the signal generator to its lowest setting and set the frequency to 30 MHz. Turn on the signal generator and power amplifier. Make sure the Transient Measurement Adpater switch is in the OFF position. Increase the output of the signal generator until the open circuit voltage reading on the VTVM is 100 volts peak. Turn the switch on the Transient Measurement Adapter to the ON position for a period of 0.5 to 1.5 seconds, then turn back to the OFF position. Turn off and disconnect all equipment Perform the Field Strength Test (see 4.8.5) to verify that the transient protection device operated as intended.

4.8 6 Internal Timer Rotate the function switch to the FLD STR position. Depress the PUSH TO TEST switch and release it Repeat the above test and after releasing the PUSH TO TEST switch, rotate the MODE switch out of the FLD STR position to any other mode. All measurements shall comply with the requirements of 3.7.4.1.

4.8.7 Self Test Rotate mode switch to OFF CHK position. Set the input voltage supply to 6.0 volts. With no connections made to the RADIO or ANT connectors, depress the PUSH TO TEST switch. The RADIO TEST SET display should read 1.000 MHz or 01.000 MHz. While depressing the PUSH TO TEST switch, reduce the input voltage supply until the Test Set display reads any value other than 1.000 MHz or 01.000 MHz. This constitutes a failed condition. Continue to reduce the input voltage supply until the Test Set display goes BLANK. All measurements shall comply with the requirements of 3.7.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

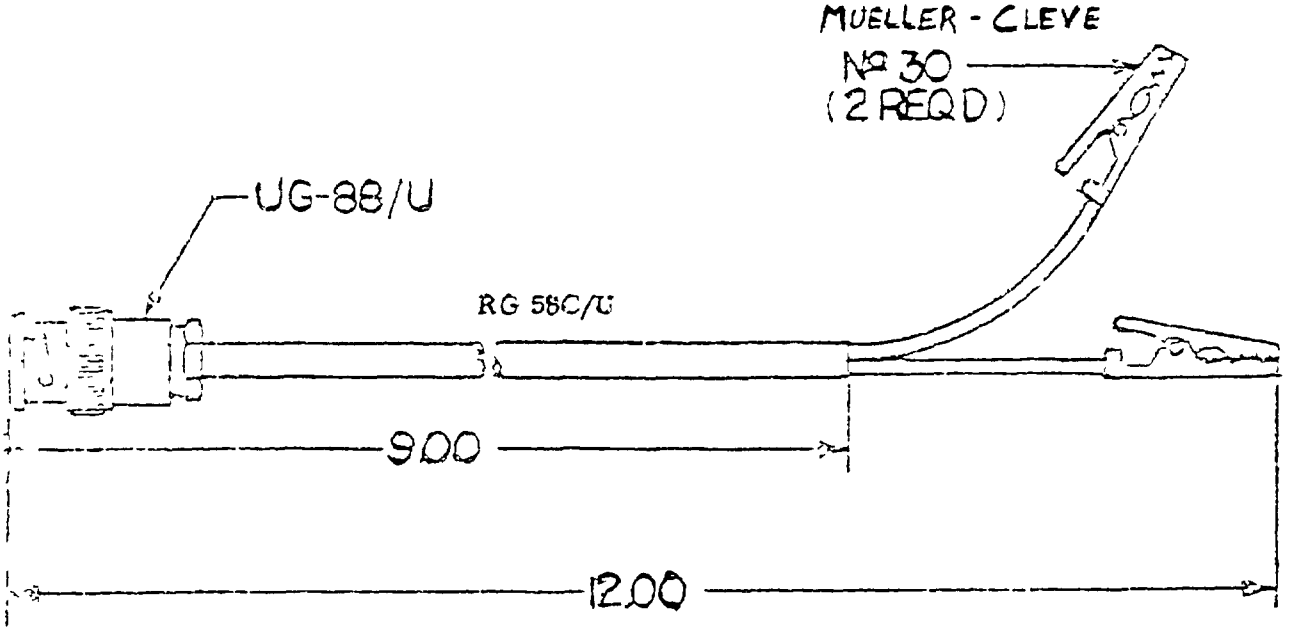


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

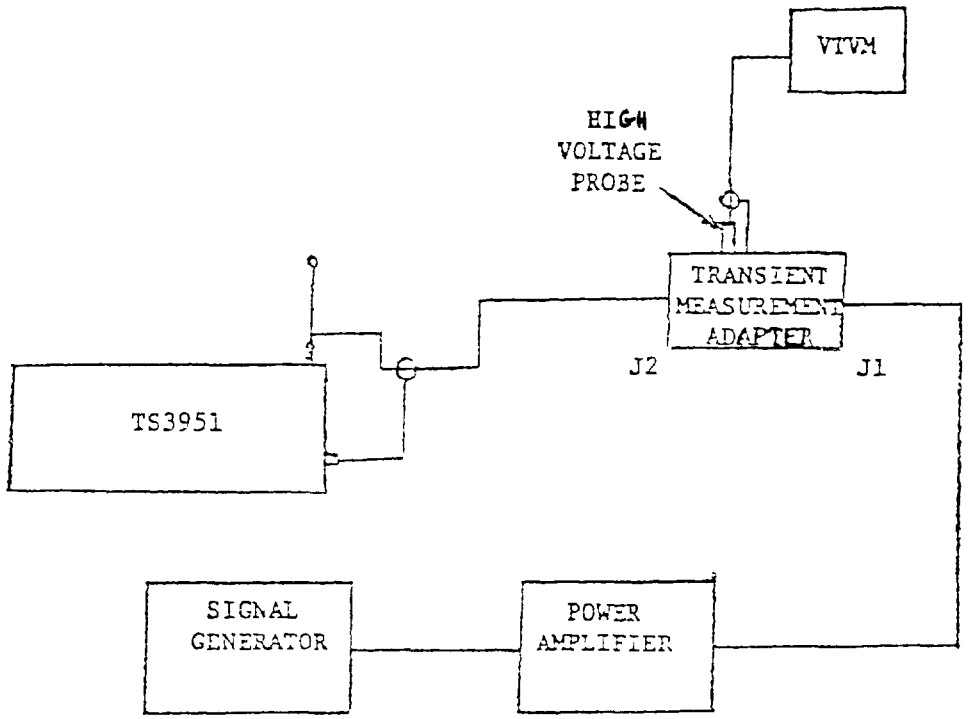


FIGURE 2

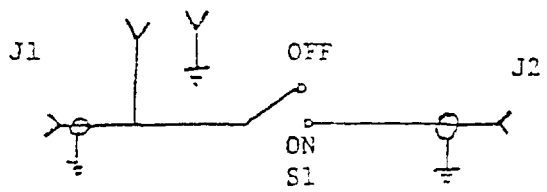


FIGURE 3

SCHEMATIC, TRANSIENT MEASUREMENT ADAPTER

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

4.8.8 Power Consumption Set the mode switch to the OFF CHK position. Depress the PUSH TO TEST switch and measure the supply current drawn by the RADIO TEST SET. Repeat the test for each position of the TEST SET MODE switch. All measurements shall comply with 3.7.6.

4.9 Environmental Performance Characteristics

4.9.1 Temperature Test

4.9.1.1 Low Temperature The equipment shall be tested in accordance with Method 502.1 Procedure I, of MIL-STD-810. The storage temperature shall be -20°C. Prior to and after testing the equipment shall meet full specification performance for the measurements specified in 3.7 (See 3.8.2).

4.9.1.2 High Temperature The equipment shall be tested in accordance with Method 500.1, Procedure II, of MIL-STD-810. The operating temperature shall be +50°C. Prior to and after testing, the equipment shall meet full specification performance for the measurements specified in 3.7 (See 3.8.2).

4.9.2 Altitude (Elevation) Test The equipment shall be tested in accordance with Method 500.1, Procedure I, of MIL-STD-810. The equipment shall be tested to withstand an altitude of 40,000 feet, non operating. Prior to and after testing, the equipment shall meet full specification performance for the measurements in 3.7 (See 3.8.3).

4.9.3 Vibration (Bounce, Loose Cargo) The test set shall be tested in its transit case in accordance with Method 514.2 Procedure XI of MIL-STD-810. Prior to and after testing, the test set shall meet full specification performance for the measurements specified in 3.7 (See 3.8.5.1).

4.9.4 Shock Test, Bench Handling The test set shall be tested in accordance with Method 516.2, Procedure V, of MIL-STD-810. Prior to and after testing, the test set shall meet full specification performance for the measurements specified in 3.7 (See 3.8.5.2).

4.9.5 Shock Test, Drop The test set shall be tested in its transit case in accordance with Method 516.2 Procedure II of MIL-STD-810. Prior to and after testing, the test set shall meet full specification performance for the measurements specified in 3. (See 3.8.5.3).

4.9.6 Leakage (Immersion) Test The transit case containing the test set shall be tested as a water-tight enclosure in accordance with MIL-STD-108, Table III. (See 3.8.4).

4.10 Visual and Mechanical Inspection Each equipment shall be examined for the defects listed in MIL-STD-252 and those features specified in Paragraphs 3.2, 3.3, 3.4.1 and 3.11. Visual and mechanical defects shall be classified by the Government as major or minor in accordance with the definitions of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

4.11 Inspection for Interchangeability The dimensions listed below shall be gauged or measured to determine compliance with the physical interchangeability requirements of 3.10. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

a External and internal dimensions of cases, covers, and insertable subassemblies and replaceable parts, wher such dimensions affect mating of parts.

b. Internal dimensions of cavities in cases and assemblies, when such dimensions affect acceptability of insertable aubassemblies.

c. Location of fasteners or separate parts of assemblies which must mate together such as cases, covers and mountings.

4 12 Quality Conformance Inspection of Packaging

4.12.1 Materials Inspection All materials to be used in packaging shall be inspected in accordance with the applicable material specification.

4 12.2 Preservation Inspection Inspection of preservation and interior markings shall be in accordance with Group A and B Quality Conformance Inspection Requirements of MIL-P-116 Lot formation and sampling procedures shall be as specified therein

4.12 3 Packing Inspection Inspection of packing and the marking for shipment and storage shall consist of the examinations specified in Table VI. Lot formation shall consist of all packs made of the same materials during an identifiable period and submitted at one time for acceptance Sampling procedures shall be in accordance with MIL-STD-105, using a single sampling plan and Acceptable Quality Level of 4.0 percent defective

5. PACKAGING

5.1 Preservation Preservation shall be in accordance with MIL-STD-726, coded as follows.

5 1.1 Level A JR-1-1-ØØ-00-NS-X-ED-Ø-00-A

5 1 2 Level B JR-1-1-ØØ-00-NS-X-ED-Ø-00-B.

5.2 Packing with Marking Packing and marking shall be in accordance with MIL-E-55585.

6 NOTES

6 1 Intended Use The AN/PRM-34 Test Set, Radio is designed to be used at Organizational Maintenance levels to test VHF FM Radio Systems The AN/PRM-34 consists of five items One (1 TS-3951 Test Set, one (1) Transit Case (1) Coaxial Cable; one (1) Operator Manual and one (1) Antenna Adapter The transit case will house the other four items and provides protection for shipping and in-the-field usage. A BA-5847/U Battery, Lithium is required for field operation but, not supplied as part of the AN/PRM-34 Test Set, Radio.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

TABLE VI

PACKING INSPECTION PROVISIONS

NO	CHARACTERISTIC	METHOD OF INSPECTION
101	Intermediate container not as specified	Visual
102	Improper closure of intermediate container	Visual
103	Shipping containers not in accordance with specification	Visual
104	Excessive cube	Visual
105	Improper blocking and bracing	Visual
106	Closure not in accordance with specification	Visual
107	Weight and size exceed container limitations	Weight & Measure
108	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
109	Marking omitted, incorrect, or illegible	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

6.2 Ordering Data The procuring agency should specify the following:

(1) Level A or Level B preservation and packaging (See section 5).

(2) When first article inspection rough handling tests are not required.

(3) When first article packaging inspection test reports require Acquisition Activity approval prior to Production Unit Packing.

6.3 First Article The First Article shall be examined and tested for approval at the contractor's plant or at an independent commercial testing laboratory acceptable to the procuring activity First article tests shall be witnessed by a Government representative of the procuring activity

6.4 Level B Preservation When level B preservation is specified, this level of protection will only be used under known favorable conditions during transportation, storage and handling.

6.5 Environmental Environmental pollution prevention measures are contained in the packaging material specifications.

Custodian
Army - CR

Preparing Activity
Army - CR
Project No. 6625-A810

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements All users of military standardization documents are invited to provide suggestions This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems Enter in block 6 any remarks not related to a specific paragraph of the document If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Communications-Electronics Command
Attn AMSEL-ED-TO
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:57Z
Check the source to verify that this is the current version before use.