MILITARY SPECIFICATION

VALVE, PRESSURE RELIEF

1. SCOPE

1.1 This specification covers a low pressure relief valve for use in battery cases to prevent hydrogen gas build-up, emitted from magnesium dry batteries (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

NN-P-71	Pallets; Materials-handling, wood (general construction requirements)
PPP-B-585	Boxes, Wood Wirebound
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Box, Fiberboard
PPP-C-843	Cushioning Material, Cellulosic
PPP-F-320	Fiberboard; Sheet, Stock and Cut Shapes
PPP-T-76	Tape; Pressure-Sensitive, Adhesive, Paper,Water Resistant
PPP-T-97	Tape; Pressure-Sensitive, Adhesive, Filament Reinforcement
QQ-A-225/3	Aluminum Alloy Bar, Rod, and Wire; Rolled, Drawn, or Cold Finished, 2011
QQ-S-781	Strapping, Steel, Flat and Seals
QQ-W-423	Wire, Steel, Corrosion-Resisting

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Contd)

MILITARY

MIL-P-116	Preservation, Methods of
MIL-P-11268	Parts, Materials and Processes Used In Electronic Equipment
MIL-M-13231	Marking of Electronic Items
MIL-F-14072	Finishes for Ground Signal Equipment
MIL-B-43014	Boxes, Water Resistant Paperboard, Folding, Set-up and metal-stayed

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection By Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized Unit Loads (40" X 48" 4-way partial and 4-way pallets)
MIL-STD-171	Finishing of Metal and Wood Surfaces
MIL-STD-252	Classification of Visual and Mechanical Defects for Equipment, Electronic, Wired, and Other Devices
MIL-STD-454	Standard Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods
MS9021	Packing, Preformed - AMS7271, "O" Ring

(Copies of specifications, standards, drawings, and publications documents required by suppliers in connection with specific procurement functions should be obtained from procuring activity or as directed by the Contracting Officer).

2.2 Other publications. - The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL BUREAU OF STANDARDS

Handbook H 28 - Screw Thread Standards for Federal Services

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington 25, D.C.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Construction. - The valve shall be constructed in accordance with the requirements of this specification and Figure 1. All materials used in the valve shall be of the corrosion-resistant type or suitably treated to resist corrosion or atmospheric conditions likely to be met in storage or normal service (see 3.7).

3.1.1 Gasket. - The exterior gasket for sealing the valve to the battery cases, shall be an "O" Ring preformed packing in accordance with Part Number MS9021-015. The valve shall provide a groove for seating of the O-Ring. The dimensions of the groove shall be those specified in the O-Ring manufacturers catalogue for static seals (see 4.4).

3.1.2 Valve body and nut. - The material for the valve body and nut shall be aluminum 2011-T3 per QQ-A-225/3 (see 4.4).

3.1.3 Protective screen. - The protective screen installed in the nut shall be 60 x 60 mesh fabricated of .0074 inch diameter wire per QQ-W-423 and passivated per MIL-STD-171 (see 4.4).

3.2 First article samples. - The contractor shall furnish four (4) First Article production samples for approval, if required by the Invitation for Bids and the contract (see 4.3 and 6.2c).


3.3 Parts, materials and processes; general. - In addition to the requirements of this specification, the full requirements of Specification MIL-P-11268, including the selection requirements therein, shall apply (see 4.4).

3.4 Finishes. - The valve shall be black anodized, finish No. E511, Type I, per MIL-F-14072 (see 4.4).

3.5 Markings. - Markings shall conform to Specification MIL-M-13231. The markings shall consist of MFR name, designation, and the rated cracking pressure (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

FIGURE 1

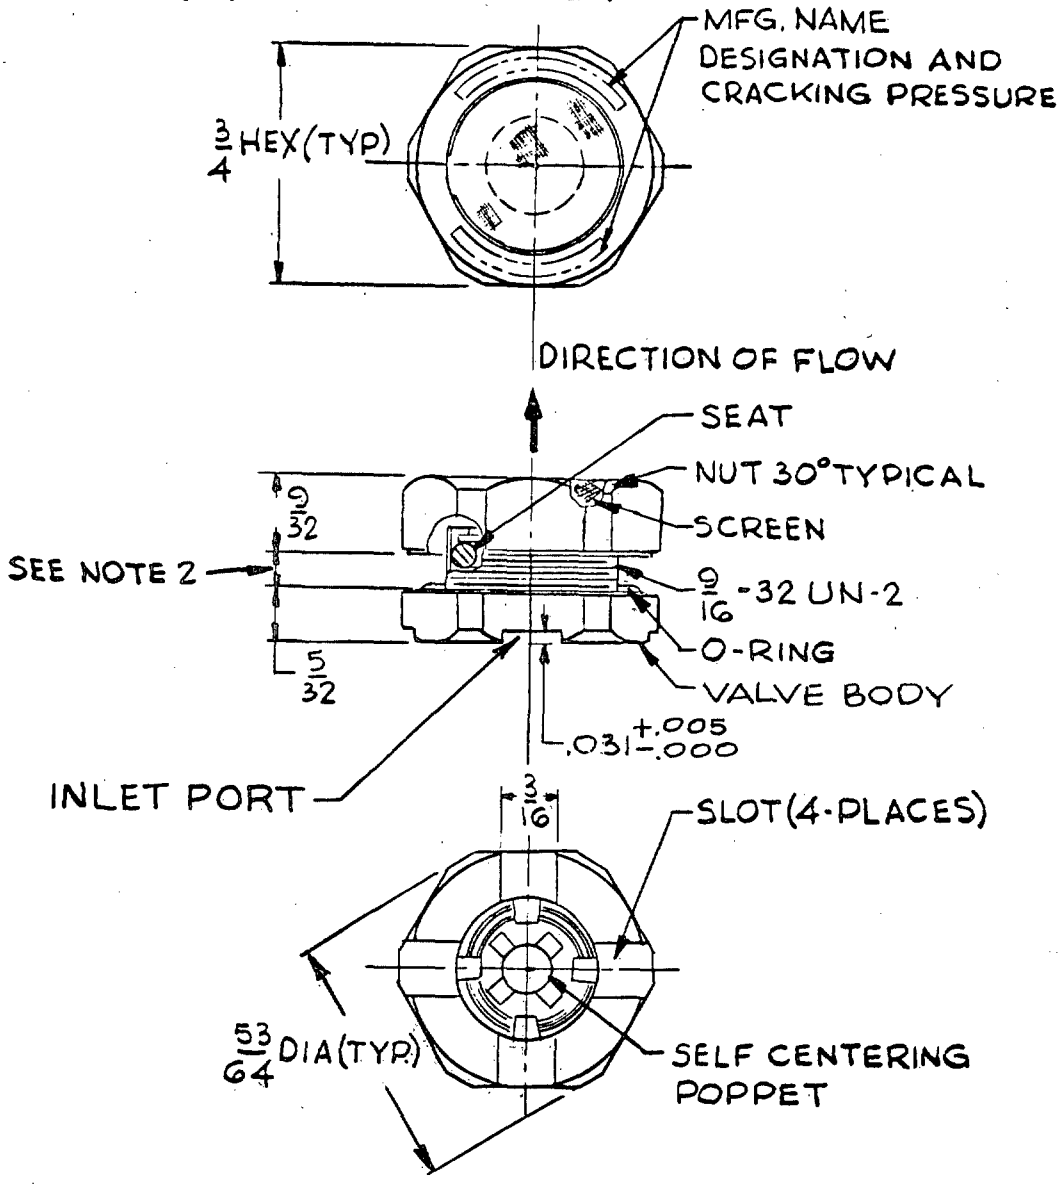

1 – WEIGHT 0.23 OUNCES. (APPROX)
2 – FOR USE WITH METAL THICKNESS 3/32 MIN. TO 1/8 MAX.
3 – TOLERANCE – FRACTIONAL DIMENSIONS SHOWN SHALL BE ± 1/64.

VALVE, PRESSURE RELIEF

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

3.6 Performance requirements. -

3.6.1 Static pressure leakage. - The valves shall not leak under a pressure of 0.16 ± .01 psi when tested as specified in 4.6.1.

3.6.2 Dynamic cracking pressure. - Dynamic cracking pressure is the minimum pressure at which air shall flow through the valve. The valve shall meet the following requirements when tested as specified in 4.6.2.

3.6.2.1 Dynamic cracking pressure at room temperature. - Dynamic cracking pressure shall not be more than 0.23 psi or less than 0.17 psi. Provision shall be made to prevent manual adjustment after cracking pressure has been set.

3.6.3 Flow rate. - The minimum flow of free air through the valve at 0.40 ± .01 psi shall be 1.6 c.f.m. when tested as specified in 4.6.3.

3.6.4 Reseating pressure. - The reseating pressure shall not be less than 0.15 psi when tested in accordance with 4.6.4.

3.7 Service conditions. - The valve shall meet the following service conditions listed below.

3.7.1 Temperature. -

3.7.1.1 High. - During and after testing as specified in 4.7.1.1, the valve shall meet the requirements of 3.6.1 (Static Pressure Leakage), and the requirement that the dynamic cracking pressure shall not be more than 0.23 psi or less than 0.17 psi.

3.7.1.2 Low. - During and after testing as specified in 4.7.1.2, the valve shall meet the requirement of 3.6.1 (Static Pressure Leakage), and the requirement that the dynamic cracking pressure shall not be more than 0.23 psi or less than 0.17 psi.

3.7.2 Humidity (moisture-resistance). - During and after testing as specified in 4.7.1.3, the valve shall meet the requirements of 3.6.1 (Static Pressure Leakage) and requirements of 3.6.2 (Dynamic Cracking Pressure).

3.7.3 Sand and dust. - After testing as specified in 4.7.1.4, the valve shall meet the requirements of 3.6.1 and 3.6.2.

3.7.4 Leakage (immersion). - The valve shall show no evidence of leakage after it is tested as specified in 4.7.1.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

3.7.5 Salt fog - After testing as specified in 4.7.1.6, the valve shall meet the requirements of 3.6.1 and 3.6.2. The valve shall show no evidence of corrosion as evidenced by any visible degradation that can be attributed to flaky, pitted, blistered, or otherwise loosened finish or metal surface.

3.7.6 Fungus - The valve, including accessories, shall show no evidence of viable fungus or corrosion when subjected to the test specified in 4.7.1.7. Corrosion is any visible degradation that can be attributed to flaky, pitted, blistered, or otherwise loosened finish or metal surface.

3.7.7 Operating life - After testing as specified in 4.7.1.8, the valve shall meet all performance requirements of 3.6.

3.8 Interchangeability - Like units, assemblies, subassemblies and replaceable parts shall conform to requirement 7 of MIL-STD-454 (see 4.8).

3.9 Workmanship - Workmanship shall be in accordance with requirement 9 of MIL-STD-454 (see 4.9).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may utilize his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.2 Classification of inspection - Inspection shall be classified as follows:

a. First Article inspection (does not include preparation for delivery) (see 4.3).

b. Inspection covered by subsidiary documents (see 4.4).

c. Quality conformance inspection:

(1) Quality conformance inspection of equipment before preparation for delivery (see 4.5).

(2) Quality conformance inspection of preparation for delivery (see 4.10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

4.3 First article inspection - This inspection shall consist of the inspection specified in the subsidiary documents covering the items listed in 4.4, and the inspection specified for group A, group B, and group C (see Tables II, III and IV, respectively). The first article inspection shall be performed in the order shown in Table I according to the number of samples specified in the contract or order.

Table I - Order of Environmental Tests

Inspection	Unit 1	Unit 2	Unit 3	Unit 4
Non-damaging (Note B)				
Temperature				
Low	1			
High	2			
Leakage (immersion)			1	
Dust			2	
Operating life				1
Potentially damaging				
Humidity (moisture-resistance)	3			
Fungus		1		
Salt fog	4			

NOTE A: Other first article inspection may precede, follow, or be interspersed between the non-damaging tests.

NOTE B: The order on non-damaging tests and the choice of which units are subjected to the non-damaging tests may be varied if convenient.

4.4 Inspection covered by subsidiary documents - The following shall be inspected under the applicable subsidiary documents as part of the inspection of equipment before preparation for delivery:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

4.4 Inspection covered by subsidiary documents (Contd) -

Item	Where Required
Parts, Materials and Processes Used in Electronic Equipment	3.3
Gaskets	3.1.1
Valve body and nut	3.1.2
Protective screen	3.1.3
Markings	3.5
Finishes	3.4

4.5 Quality conformance inspection of equipment before preparation for delivery - The contractor shall perform the inspection specified in 4.4 and 4.5.1 through 4.5.5. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition, the Government - at its discretion - may perform all or any part of the specified inspection, to verify the contractor's compliance with specified requirements (see 6.3). Test equipment for Government verification inspection shall be made available by the contractor.

4.5.1 Group A inspection - Each unit of each lot of equipment shall be inspected for conformance to all the inspection and test requirements of Table II. Each lot will be subject to verification, utilizing the procedures of MIL-STD-105 using the general inspection levels and the AQLs indicated in Table II. Group A inspection shall be performed in any order which is satisfactory to the Government.

Table II - Group A Inspection

Inspection	Req Para	Insp Para	AQL Major	AQL Minor
Visual and mechanical	3.9	4.9	1.0%	4%
Static pressure leakage	3.6.1	4.6.1	1.0% for Group	N/A
Dynamic cracking pressure	3.6.2	4.6.2		
Flow rate	3.6.3	4.6.3		
Reseating pressure	3.6.4	4.6.4		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

4.5.2 Group B inspection - This inspection, including sampling, shall conform to Table III and to special procedures for small-sample inspection of MIL-STD-105. Group B inspection shall normally be performed on inspection lots that have passed group A inspection and on samples selected from units that have been subjected to and met the group A inspection. Inspection levels shall be S-4.

Table III - Group B Inspection

Inspection	Req Para	Insp Para	AQL
Leakage (immersion)	3.7.4	4.7.1.5	4.0%
Interchangeability	3.8	4.8	6.5%

4.5.3 Group C inspection - This inspection shall consist of the tests specified in Table IV and shall be performed on sample units that have been subjected to and met Group A and Group B inspection. Sample units shall be selected in accordance with 4.5.3.1.

Table IV - Group C Inspection

Inspection	Req Para	Insp Para
Subgroup I		
Operating life	3.7.7	4.7.1.8 (Note 1)
Subgroup II		
Temperature (High and Low)	3.7.1	4.7.1
Humidity (Moisture-resistance)	3.7.2	4.7.1.3 (Note 2)
Sand and dust	3.7.3	4.7.1.4 (Note 2)
Salt fog	3.7.5	4.7.1.6 (Note 2)
Fungus	3.7.6	4.7.1.7 (Note 2)

NOTE 1: Sample units subjected to this test shall not be furnished on contract.

NOTE 2: Unless otherwise specified in contract or order, a different sample unit shall be used for each of these tests.

4.5.3.1 Sampling for inspection - Units selected for each Group C inspection shall be selected without regard to their quality in accordance with the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

4.5.3.1.1 Subgroup I - For this subgroup, one (1) unit shall be selected from every 1000 production units and fraction thereof produced or every 30 days, whichever occurs first. The first sample selected shall be at the start of the contract from the first quality conformance inspection production lot.

4.5.3.1.2 Subgroup II - For this subgroup, four (4) units shall be selected from the first production lot for the first Group C inspection.

4.5.3.2 Noncompliance - The contractor shall immediately report in writing each group C failure occurrence, including details of the failure and characteristics affected. The contractor shall immediately investigate the cause of failure and further report the results of investigation and details of the proposed corrective action on (i) the process and materials, as applicable, and, (ii) all units of product which were manufactured under the same conditions and which the Government considers subject to the same failure. Reports shall be forwarded to the responsible technical activity designated in the contract through the Quality Assurance Representative. After corrective action has been taken, additional sample units shall be subjected to group C inspection (all inspections, or the inspections which the sample failed, at the option of the Government) and Groups A and B inspection may be reinstituted; however, final acceptance and shipment will be withheld until the group C reinspection results have shown that the corrective action was effective.

4.5.4 Reinspection of conforming Group C sample units - Unless otherwise specified, sample units which have been subjected to and passed group C inspection may be accepted on the contract or order provided all damage is repaired and the sample units are resubjected to and pass group A inspection.

4.5.5 Disposition of group C sample units - Unless otherwise specified, sample units which have been subjected and passed group C inspection may be delivered on the contract or order.

4.6 Performance requirements tests - Unless otherwise specified, all testing shall be performed at ambient room temperature, humidity and barometric pressure; and all pressures specified are gage pressures.

4.6.1 Static pressure leakage - Air at a pressure of 0.16 $\pm$ .01 psi shall be applied to the inlet port of a valve. Any suitable means may be employed for detection of air leakage through the valve (see 3.6.1).

4.6.2 Dynamic cracking pressure - Air, at a pressure of .17 psi, shall be applied to the inlet port of the valve with the outlet port open to the atmosphere. The pressure shall be increased in .01 psi increments until dynamic cracking occurs (see 3.6.2 and 3.6.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

4.6.3 Flow rate. - Pressure at 0.40 ± .01 psi shall be applied to the inlet port of the valve with the outlet port open to the atmosphere and the air flow measured. Any suitable means shall be used to determine flow rate.

4.6.4 Reseating pressure. - The relief valve shall be operated several times and then the pressure shall be raised to 1.0 psi. Subsequently, the air flow shall be reduced to a negligible amount and allowed to exhaust into a beaker of water. The pressure shall be reduced gradually until no bubbles appear for a period of 3 minutes. The final pressure is the reseating pressure. Any suitable means shall be used to determine reseating pressure.

4.7 Service conditions tests. - The following tests shall be performed on the equipment (see 3.7).

4.7.1 Temperature tests. -

4.7.1.1 High temperature. - The valve shall be tested in accordance with Method 501, Procedure II, of MIL-STD-810. For Step 7, the internal chamber temperature shall be adjusted to +71°C (160°F) for test item operation. The dynamic cracking pressure test operation shall be conducted as detailed in 4.6.2 at the operating temperature (see 3.7.1.1).

4.7.1.2 Low temperature. - The valve shall be tested in accordance with Method 502, Procedure I, of MIL-STD-810. The storage temperature shall be -70°F and the lowest operating temperature shall be -50°F. The dynamic cracking pressure test operation shall be conducted as detailed in 4.6.2 at the operating temperature (see 3.7.1.2).

4.7.1.3 Humidity test. - The valve shall be tested in accordance with Method 507, Procedure II, of MIL-STD-810. Measurements shall be made during the last 5 hours of the final cycle of step 6 and as otherwise specified in Procedure II (see 3.7.2).

4.7.1.4 Sand and dust. - The valve shall be tested in accordance with Method 510, Procedure I, of MIL-STD-810. The valve shall be assembled to a sealed container and the assembly shall be oriented so that the valve is in a horizontal position and the side of the valve at right angles to the dust stream flow (see 3.7.3).

4.7.1.5 Leakage (immersion). - The valve, assembled to a sealed container, shall be tested in accordance with Method 512, Procedure I, of MIL-STD-810 (see 3.7.4).

4.7.1.6 Salt fog. - The valve, assembled to a sealed container, shall be tested in accordance with Method 509, Procedure I, of MIL-STD-810 (see 3.7.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

4.7.1.7 Fungus. - The valve shall be tested in accordance with Method 508, Procedure I, of MIL-STD-810. Gasket sealed or other nonhermetic sealed test items shall be opened during exposure and the internal and external surfaces of the valve shall be sprayed with spore suspension. Operation of the valve is not required (see 3.7.6).

4.7.1.8 Operating life. - The valve shall be continuously cycled 1000 times as follows, under ambient room temperature, humidity, and barometric pressure conditions. With air pressure applied to the inlet port of the valve and the outlet port of the valve open to the atmosphere, increase the inlet air pressure gradually from zero psi to 1.0 psi and then reduce the air pressure to zero psi (see 3.7.7).

4.8 Inspection for dimensional interchangeability. - The dimensions listed below shall be gaged or measured to determine conformance to the physical interchangeability requirement of 3.8. When a listed dimension is not within specified or design limits, it shall be considered a major defect.

a. Size of the gland in the valve for seating of the O-Ring gasket.

b. Size and form of the special threads on the valve and nut.

4.9 Visual and mechanical inspection. - Visual and mechanical inspection shall be in accordance with MIL-STD-252 and the following inspection: Parts, components and complete equipments shall be inspected for workmanship and mechanical construction. The equipment shall be inspected for proper mechanical operation. Clearances, dimensions, and mechanical adjustments shall be measured. Markings shall be inspected for conformance with approved facsimiles, when facsimiles are required (see 3.9).

4.10 Quality conformance inspection of preparation for delivery. - Preparation for delivery shall be inspected in accordance with MIL-P-116 to determine conformance to the requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. - Preservation and packaging shall be level A or C, as specified (see 6.2b).

5.1.1 Level A. -

5.1.1.1 Cleaning. - Cleaning shall be accomplished in accordance with process C-1 of MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

5.1.1.2 Drying - Drying shall be accomplished in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservation application - None required.

5.1.1.4 Valve, Pressure Relief - Each pressure relief valve shall be individually packaged Method IC-1, of MIL-P-116 as follows: Cushion each item by wrapping in cellulosic cushioning material conforming to PPP-C-843, Type II, class A, prior to placing item in bag. Heat seal the bag.

5.1.1.5 Intermediate package - Place a quantity of pressure relief valves, packaged as specified in 5.1.1.4, within a close-fitting folding or set-up box conforming to MIL-B-43014. The box shall contain multiples of five unit packages, not to exceed 100 packages or twenty pounds. Close the box in accordance with the appendix of the box specification.

5.1.2 Level C - Pressure relief valves shall be preserved and packaged in a manner that will afford adequate protection against physical and environmental damage during shipment, handling and limited intransit storage.

5.2 Packing - Packing shall be level A, B or C as specified. Shipping containers for all levels shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents (see 6.2b).

5.2.1 Level A -

5.2.1.1 Consolidation - A quantity of pressure relief valves packaged as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-636, type CF, class weather-resistant. Box closure shall be as specified in the appendix of the box specification. To facilitate palletization, fiberboard boxes shall be uniform in size and contain equal quantities of the packaged items to the greatest extent practicable.

5.2.1.2 Palletized load - A quantity of containers, packed as specified in 5.2.1.1, shall be placed on a pallet, load type 1, conforming to MIL-STD-147 except that the pallet shall be softwood conforming to NN-P-71, type IV, size 2. A fiberboard cap shall be employed over the load having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, class weather-resistant, W5s, or V3c. The load shall be "bonded" to the pallet by strapping.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

5.2.1.3 Less than palletized load - When quantities per destination are less than a pallet load, the containers packed as specified in 5.2.1.1 shall be waterproofed, with tape conforming to PPP-T-76, in accordance with the taping requirements of the appendix of the box specification. A quantity of the waterproofed containers shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type I, class B.

5.2.2 Level B -

5.2.2.1 Consolidation - A quantity of Pressure Relief Valves, packaged as specified in 5.1, shall be packed as specified in 5.2.1.1.

5.2.2.2 Palletized load - A quantity of containers, packed as specified in 5.2.2.1, shall be palletized as specified in 5.2.1.2.

5.2.2.3 Less than palletized load - When quantities per destination are less than a pallet load, the containers packed as specified in 5.2.2.1 shall be reinforced by pressure-sensitive filament tape conforming to PPP-T-97, type IV as specified in the appendix of the box specification. No further packing shall be required.

5.2.3 Level C -

5.2.3.1 Consolidation - A quantity of Pressure Relief Valves, packaged as specified in 5.1, shall be packed as specified in 5.2.1.1, except that the fiberboard boxes shall be class domestic.

5.2.3.2 Palletized load - A quantity of containers, packed as specified in 5.2.3.1, shall be palletized as specified in 5.2.1.2, except that the fiberboard cap shall be class domestic.

5.2.3.3 Less than palletized load - When quantities per destination are less than a pallet load, the containers packed as specified in 5.2.3.1 shall be used as the shipping container. No further packing shall be required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.

5.3 Marking. - In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. - The relief valve is intended for use as a protective device against build-up of excessive hydrogen gas pressure generated by a magnesium dry battery in a sealed case.

6.2 Ordering data. - Procurement documents should specify the following:

a. Title, number, and date of this specification and any amendment thereto.

b. Levels of packaging (see 5.1), and level of packing (see 5.2) required for shipment (Level A, level B, or level C).

c. First article required (see 3.2).

d. Marking and shipping of samples.

e. Place of final inspection.

6.3 Verification inspection. - Verification by the Government will be limited to the amount deemed necessary to determine compliance with the contract and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract. The amount of verification by the Government will be adjusted to make maximum utilization of the contractor's quality control system and the quality history of the product.

CUSTODIAN

ARMY - EL

PREPARING ACTIVITY

ARMY - EL

PROJECT NO. 4820-A255

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:08Z
Check the source to verify that this is the current version before use.