
FEDERAL SPECIFICATION SHEET

BEARING, ROLLER, TAPERED, SINGLE ROW, STEEP ANGLE (TYPE TSS)

This specification is approved by the Administrator, Federal Supply service, General Services Administration, for the use of all Federal Agencies:

The complete requirements for procuring the bearings described herein, shall consist of this document and the latest issue of FF-B-187/GEN.

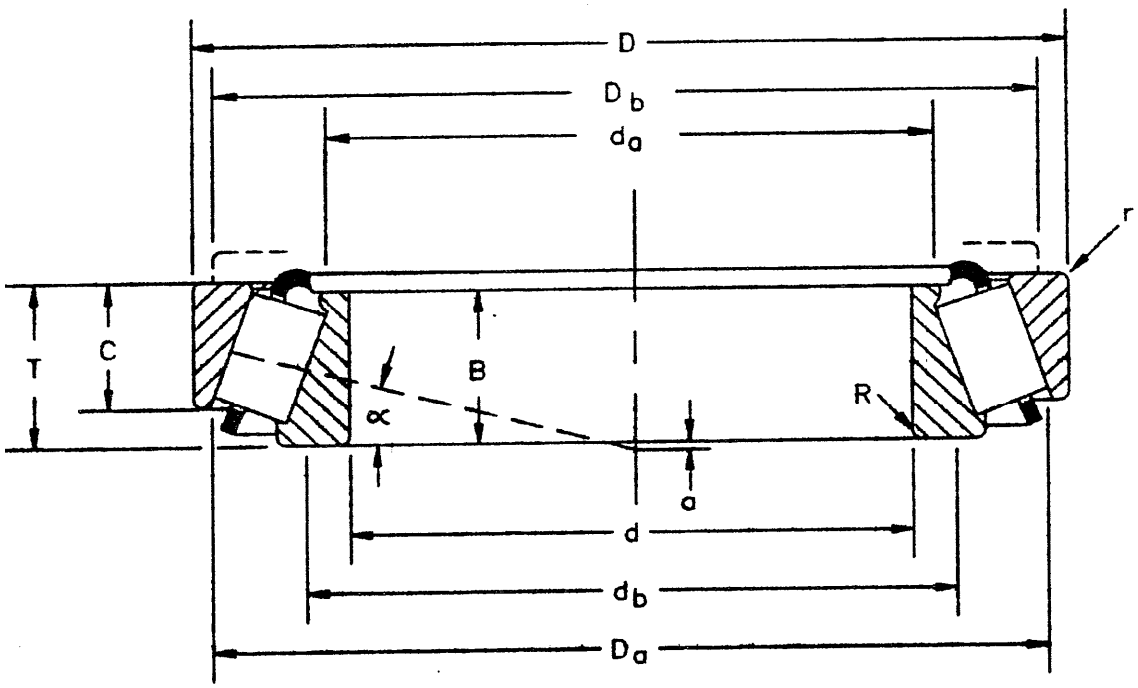

BEARING CONFIGURATION

AMSC N/A

FSC 3110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_b RECOMMENDED SHOULDER DIAMETER SHAFT	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_b RECOMMENDED SHOULDER DIAMETER HOUSING	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
01	11590-11520	0.6250	1.6875	0.5625	0.5625	0.3750	0.06	0.06	0.96	0.89	1.36	1.56	.83	3000	-0.05
02	21063-21212	0.6250	2.1250	0.8750	0.8598	0.6250	0.03	0.09	1.14	1.03	1.69	1.97	.99	7500	-0.23
03	21075-21212	0.7500	2.1250	0.8750	0.8598	0.6250	0.06	0.09	1.24	1.03	1.69	1.97	.99	7500	-0.23
04	23092-23256	0.9375	2.5625	0.8750	0.8450	0.6250	0.06	0.06	1.52	1.36	2.09	2.48	.60	8800	-0.09
05	23100-23256	1.0000	2.5625	0.8750	0.8450	0.6250	0.06	0.06	1.54	1.36	2.09	2.48	.80	8800	-0.09
06	41125-41286	1.1250	2.8593	0.9688	0.9550	0.6875	0.19	0.06	1.89	1.44	2.40	2.68	.97	11200	-0.16
07	41126-41286	1.1250	2.8593	0.9688	0.9550	0.6875	0.06	0.06	1.63	1.44	2.40	2.68	.97	11200	-0.16
08	43112-43312	1.1250	3.1250	1.0000	0.9478	0.6875	0.03	0.06	1.67	1.63	2.64	2.91	.87	12500	-0.08
09	43125-43312	1.2500	3.1250	1.0000	0.9478	0.6875	0.06	0.06	1.73	1.63	2.64	2.91	.87	12500	-0.08
10	43131-43312	1.3125	3.1250	1.0000	0.9478	0.6875	0.14	0.06	2.01	1.65	2.64	2.91	.87	12500	-0.08
11	43132-43312	1.3125	3.1250	1.0000	0.9478	0.6875	0.08	0.06	1.89	1.65	2.64	2.91	.87	12500	-0.08
12	44131-44348	1.3125	3.4843	1.0000	0.9330	0.6875	0.08	0.06	2.01	1.89	2.95	3.31	.75	13600	0.09
13	41143-44348	1.4375	3.4843	1.0000	0.9330	0.6875	0.09	0.06	2.13	1.97	2.95	3.31	.75	13600	0.09
14	41150-44348	1.5000	3.4843	1.0000	0.9330	0.6875	0.09	0.06	2.17	2.00	2.95	3.31	.75	13600	0.09
15	53150-53375	1.5000	3.7500	1.2188	1.1142	0.8125	0.06	0.03	2.17	2.07	3.19	3.50	.79	16200	-0.01
16	44158-44348	1.5625	3.4843	1.0000	0.9330	0.6875	0.14	0.06	2.28	2.00	2.95	3.31	.75	13600	0.09
17	44162-44348	1.6250	3.4843	1.0000	0.9330	0.6875	0.09	0.06	2.24	2.00	2.95	3.31	.75	13600	0.09
18	M903345-M903310	1.6250	3.6250	1.0313	0.9375	0.6563	0.14	0.06	2.36	2.13	3.07	3.46	.70	13900	0.14

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - Continued

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	RECOMMENDED SHOULDER DIAMETER				K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB)	a 3/ EFFECTIVE LOAD CENTER
									d_b SHAFT	d_a SHAFT	D_b HOUSING	D_a HOUSING		RADIAL	
19	53162-53375	1.6250	3.7500	1.2188	1.1142	0.8125	0.06	0.03	2.24	2.07	3.19	3.50	.79	16200	-0.01
20	HM903244-HM903210	1.6250	3.7500	1.2188	1.1142	0.8750	0.06	0.03	2.32	2.12	3.19	3.58	.79	18500	0.02
21	HM903245-HM903210	1.6250	3.7500	1.2188	1.1250	0.8750	0.14	0.03	2.48	2.12	3.19	3.58	.79	18500	0.02
22	53176-53375	1.7500	3.7500	1.2188	1.1142	0.8125	0.05	0.03	2.32	2.07	3.19	3.50	.79	16200	-0.01
23	53176-53377	1.7500	3.7500	1.2188	1.1142	0.8125	0.05	0.09	2.32	2.07	3.15	3.50	.79	16200	-0.01
24	53177-53375	1.7500	3.7500	1.2188	1.1142	0.8125	0.14	0.03	2.48	2.07	3.19	3.50	.79	16200	-0.01
25	53178-53375	1.7500	3.7500	1.2188	1.1142	0.8125	0.08	0.03	2.36	2.07	3.19	3.50	.79	16200	-0.01
26	HM903247-HM903210	1.7500	3.7500	1.2188	1.1142	0.8750	0.05	0.03	2.40	2.12	3.19	3.58	.79	18500	0.02
27	HM903249-HM903210	1.7500	3.7500	1.2188	1.1250	0.8750	0.14	0.03	2.56	2.12	3.19	3.58	.79	18500	0.02
28	HM903249A HM903210	1.7500	3.7500	1.2188	1.1142	0.8750	0.14	0.03	2.56	2.12	3.19	3.58	.79	18500	0.02
29 *	53176-53387	1.7500	3.8750	1.2188	1.1142	0.8125	0.05	0.03	2.32	2.07	3.23	3.58	.79	18500	-0.01
30	55175C-55437	1.7500	4.3750	1.1875	1.0594	0.8125	0.14	0.13	2.76	2.52	3.62	4.13	.66	20600	0.30
31	55176C-55437	1.7500	4.3750	1.1875	1.0594	0.8125	0.03	0.13	2.56	2.54	3.62	4.13	.66	20600	0.30
32	55187C-55437	1.8750	4.3750	1.1875	1.0594	0.8125	0.14	0.13	2.72	2.44	3.62	4.13	.66	20600	0.30
33	72188C-72487	1.8750	4.8750	1.4375	1.2910	1.0000	0.03	0.13	2.72	2.63	4.02	4.57	.79	29200	0.08
34	55200-55437	2.0000	4.3750	1.1875	1.0594	0.8125	0.14	0.13	2.80	2.52	3.62	4.13	.66	17200	0.28
35	55200C-55437	2.0000	4.3750	1.1875	1.0594	0.8125	0.14	0.13	2.80	2.54	3.62	4.13	.66	20600	0.30
36	HM907643-HM907614	2.0000	4.3750	1.1875	1.1250	0.8125	0.14	0.13	2.91	2.56	3.58	4.13	.66	19900	0.30

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - Continued

DASH NUMBER	PART NUMBER 1/ CONE-CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_b RECOMMENDED SHOULDER DIAMETER SHAFT	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_b RECOMMENDED SHOULDER DIAMETER HOUSING	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	e 3/ EFFECTIVE LOAD CENTER
37	55200C-55443	2.0000	4.4375	1.1875	1.0594	0.8125	0.14	0.13	2.80	2.54	3.62	4.17	.66	20600	0.30
38	66200-66462	2.0000	4.6250	1.3125	1.2500	0.9375	0.14	0.13	2.80	2.56	3.94	4.37	.93	24000	-0.01
39	72200-72487	2.0000	4.8750	1.4375	1.2910	1.0000	0.14	0.13	2.91	2.59	4.02	4.57	.79	29200	0.05
40	72200C-72487	2.0000	4.8750	1.4375	1.2910	1.0000	0.14	0.13	3.03	2.64	4.02	4.57	.79	29200	0.08
41	72201C-72487	2.0000	4.8750	1.4375	1.2910	1.0000	0.03	0.13	3.03	2.64	4.02	4.57	.79	29200	0.08
42 *	55206-55437	2.0625	4.3750	1.1875	1.0594	0.8125	0.14	0.13	2.83	2.52	3.62	4.13	.66	17200	0.28
43	55206C-55437	2.0625	4.3750	1.1875	1.0594	0.8125	0.14	0.13	2.83	2.54	3.62	4.13	.66	20600	0.30
44	66212-66462	2.1250	4.6250	1.3125	1.2500	0.9375	0.14	0.13	2.87	2.64	3.94	4.37	.93	24000	-0.01
45	66584-66520	2.1250	4.8125	1.3125	1.2500	0.9375	0.14	0.13	2.95	2.68	4.13	4.57	.88	25000	0.08
46	72212C-72487	2.1250	4.8750	1.4375	1.2910	1.0000	0.14	0.13	3.11	2.64	4.02	4.57	.79	29200	0.08
47	HM911242-HM911210	2.1250	5.1250	1.4375	1.3125	0.9375	0.14	0.13	3.11	2.91	4.29	4.87	.71	26900	0.21
48	78214C-78551	2.1250	5.5130	1.4375	1.3085	0.9260	0.03	0.09	3.11	3.05	4.61	5.20	.67	32200	0.33
49	78215-78551	2.1250	5.5130	1.4375	1.3085	0.9260	0.14	0.09	3.19	2.95	4.61	5.20	.67	32200	0.31
50	78215C-78551	2.1250	5.5130	1.4375	1.3085	0.9260	0.14	0.09	3.31	3.05	4.61	5.20	.67	32200	0.33
51	72218C-72487	2.1875	4.8750	1.4375	1.2910	1.0000	0.14	0.13	3.15	2.64	4.02	4.57	.67	29200	0.08
52	66225-66462	2.2500	4.6250	1.3125	1.2500	0.9375	0.14	0.13	2.99	2.71	3.94	4.37	.93	24000	-0.01
53	72225C-72487	2.2500	4.8750	1.4375	1.2910	1.0000	0.14	0.13	3.19	2.64	4.02	4.57	.79	29200	0.08
54	78225-78551	2.2500	5.5130	1.4375	1.3085	0.9260	0.14	0.09	3.27	3.03	4.61	5.20	.67	29200	0.31

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – Continued

DASH NUMBER	PART NUMBER 1/ CONE–CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_b RECOMMENDED SHOULDER DIAMETER SHAFT	d_a RECOMMENDED SHOULDER DIAMETER SHAFT	D_b RECOMMENDED SHOULDER DIAMETER HOUSING	D_a RECOMMENDED SHOULDER DIAMETER HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
55	78225C–78551	2.2500	5.5130	1.4375	1.3085	0.9260	0.14	0.09	3.39	3.05	4.61	5.20	.67	32200	0.33
56	HM911245–HM911210	2.3750	5.1250	1.4375	1.3125	0.9375	0.20	0.13	3.43	2.92	4.29	4.87	.71	26900	0.21
57	HM911245–HM911216	2.3750	5.3143	1.4119	1.3125	0.8641	0.20	0.14	3.43	2.92	4.41	4.84	.71	26900	0.21
58 *	HM911249–HM911210	2.4375	5.1250	1.4375	1.3125	0.9375	0.14	0.13	3.35	2.92	4.29	4.87	.71	26900	0.21
59	HM913842–H913810	2.4375	5.7500	1.6250	1.5625	1.0000	0.14	0.13	3.54	3.24	4.88	5.43	.75	37000	0.17
60	78250–78537	2.5000	5.3750	1.4375	1.3085	0.9260	0.09	0.13	3.35	3.10	4.53	5.12	.67	32200	0.31
61	78250–78551	2.5000	5.5130	1.4375	1.3085	0.9260	0.09	0.09	3.35	3.10	4.61	5.20	.67	32200	0.31
62	HH914447–HH914412	2.5000	7.0000	2.2500	2.1250	1.4688	0.14	0.13	4.13	3.35	5.75	6.50	.73	60900	–0.01
63	HH914449–HH914412	2.6250	7.0000	2.2500	2.1250	1.4688	0.14	0.13	4.17	3.36	5.75	6.50	.73	60900	–0.01
64	9185–9121	2.6875	6.0000	1.8750	1.8125	1.2500	0.14	0.13	3.70	3.20	5.12	5.71	.89	45700	–0.15
65	HM914545–HM914510	2.7500	5.7500	1.4375	1.3125	0.9375	0.16	0.13	3.74	3.38	4.80	5.47	.62	28000	0.50
66	H913849–H913810	2.7500	5.7500	1.6250	1.5625	1.0000	0.14	0.13	3.74	3.24	4.88	5.43	.75	37000	0.17
67	9285–9220	3.0000	6.3750	1.9375	1.8125	1.2500	0.14	0.13	4.06	3.56	5.43	6.03	.82	47700	0.00
68	9380–9321	3.0000	6.7500	1.9375	1.8125	1.2500	0.14	0.13	4.13	3.87	5.79	6.46	.76	49100	0.17
69	M917840–M917810	3.0000	7.1250	2.1250	2.0938	1.4063	0.14	0.13	4.33	3.94	5.98	6.69	.80	60600	0.02
70	H917849–H917810	3.2500	7.1250	2.1250	2.0938	1.4063	0.13	0.13	4.49	3.94	5.98	6.69	.80	60600	0.02
71	9386H–9321	3.3125	6.7500	1.9375	1.8125	1.2500	0.14	0.13	4.37	3.87	5.79	6.46	.76	49100	0.17

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS – Continued

DASH NUMBER	PART NUMBER 1/ CONE–CUP	d BORE	D OUTSIDE DIA	T BEARING WIDTH	B CONE WIDTH	C CUP WIDTH	R 2/ MAX SHAFT FILLET RADIUS	r 2/ MAX HOUSING FILLET RADIUS	d_b RECOMMENDED SHOULDER DIAMETER SHAFT	d_a SHAFT	D_b HOUSING	D_a HOUSING	K FACTOR	BASIC DYNAMIC LOAD RATINGS (LB) RADIAL	a 3/ EFFECTIVE LOAD CENTER
72	98350–98788	2.5000	7.8740	2.0772	1.9375	1.3750	0.14	0.13	4.65	4.41	6.85	7.40	.92	65200	0.05
73	90381–90744	3.8125	7.4375	2.0000	1.8125	1.2500	0.14	0.13	4.92	4.44	6.34	7.06	.87	47200	0.50
74	LM921845–LM921810	4.0000	7.0000	1.3750	1.2500	0.7500	0.13	0.13	4.84	4.69	6.06	6.77	.50	30400	1.36
75	98400–98788	4.0000	7.8740	2.0772	1.9375	1.3750	0.14	0.13	5.04	4.75	6.85	7.40	.92	65200	0.05
76	HH923649–HH923610	4.0000	9.8750	3.0000	2.8750	2.0000	0.25	0.25	5.87	5.15	8.15	9.01	.84	111200	–0.13
77	HH923649–HH923611	4.0000	9.8750	3.0000	2.8750	2.0000	0.25	0.13	5.87	5.15	8.27	9.01	.84	111200	–0.13
78	37425–37625	4.2500	6.2500	0.9063	0.8440	0.6250	0.14	0.13	4.80	4.53	5.63	5.98	.96	18900	0.54
79 *	37431–37625	4.3125	6.2500	0.9063	0.8440	0.6250	0.14	0.13	4.84	4.57	5.63	5.98	.96	18900	0.54
80	H924045–H924010	4.3750	8.4375	2.1875	2.0625	1.5625	0.14	0.13	5.47	5.16	7.32	8.07	.87	75300	0.27
81	HM926740–HM926710	4.5000	9.0000	2.1250	1.9460	1.5000	0.14	0.13	5.75	5.59	7.87	8.63	.79	79400	0.53
82	HH926744–HH926710	4.5000	10.7500	3.2500	3.2500	2.1250	0.25	0.25	6.46	5.80	9.06	9.97	.92	143400	–0.26
83	HH926744–HH926716	4.5000	11.0000	3.2500	3.2500	2.1250	0.25	0.25	6.46	5.80	9.17	9.97	.92	143400	–0.26
84	HH926749–HH926710	4.7500	10.7500	3.2500	3.2500	2.1250	0.25	0.25	6.61	5.80	9.06	9.97	.92	143400	–0.26
85	97500–97900	5.0000	9.0000	2.1250	1.9460	1.5000	0.14	0.13	5.94	5.65	7.76	8.38	.79	59800	0.52
86	HM926747–HM926710	5.0000	9.0000	2.1250	1.9460	1.5000	0.14	0.13	6.14	5.63	7.87	8.63	.79	79400	0.53
87	HH932132–HH932110	5.0000	12.0000	3.5000	3.5000	2.2500	0.25	0.25	7.17	6.77	10.24	11.34	.80	155800	0.07
88	48506–48750	5.0625	7.5000	1.3750	1.2500	1.0000	0.14	0.13	5.67	5.43	6.69	7.20	.89	28800	0.65
89	HH932145–HH932110	5.7500	12.0000	3.5000	3.2500	2.2500	0.25	0.25	7.68	6.87	10.24	11.34	.80	155800	0.07
90	HH932145–HH932115	5.7500	12.2500	3.5000	3.2500	2.2500	0.25	0.25	7.68	6.87	10.31	11.34	.80	155800	0.07

* INACTIVE FOR NEW DESIGN AFTER 20 MAR 1978.

1/ PART NUMBERS ARE FOR REFERENCE ONLY. PART NUMBERS REFLECT THE CUP AND CONE NUMBERS USED BY INDUSTRY AND THE AMERICAN BEARING MANUFACTURERS ASSOCIATION (ABMA).

2/ THESE MAXIMUM FILLET RADII SHALL BE CLEARED BY THE BEARING CORNERS.

3/ MINUS VALUE INDICATES LOAD CENTER INSIDE CONE BACKFACE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Cones, cups, and rollers: bearing quality - carburizing grade alloy or through--hardening grade alloy steel in accordance with ASTM-A295, ASTM-A534, or ASTM-A535. Cage: carbon steel (one piece stamped).

2. Hardness: Cones, cups and rollers: 58 to 64HRC.

3. Tolerances: Standard grade (AFBMA Class 4) (allowable tolerances are in 0.0001 Inch).

Cone bore (d)			
Size range B		Tolerance	
Over	Incl.	Plus	Minus
0	3.0000	5	0
3.0000	6.0000	10	0

Cup diameter (D)			
Size range		Tolerance	
Over	Incl.	Plus	Minus
0.0000	12.0000	10	0
12.0000	24.0000	20	0

Bearing width (T)			
Bore size range		Tolerance	
Over	Incl.	Plus	Minus
0	4.0000	80	0
4.0000	6.0000	140	100

Assembled bearing maximum radial runout		
Cup O.D. (D)		Tolerance
Over	Incl.	
0	24.0	20

4. Effective load center: Dimension (a) locates a point on the cone axis which is the center of pressure of all resisting forces set up by the rollers. All moments should be calculated from this point when determining bearing loading and shaft stresses. A plus value of (a) indicates that the center is outside the cone backface.

5. Operating temperature: Recommended operating temperature not to exceed 230° F.

6. Lubrication: Bearings shall be furnished without lubrication. All bearings shell be preserved in accordance with MIL-P-197.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the current version before use.

7. Steep angle: A sleep angle bearing has a contact angle (a) between 22 and 31 degrees. The contact angle is the angle between the line of action of the roller load and a plane perpendicular to the bearing axis.

8. Part number: The part number consist of the letters FFB, the basic federal specification number, the specification sheet number and o dash number from table I.

EXAMPLE: FFB187/03 – 050

Dash Number

Federal Specification Number

9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

10. Referenced documents shall be of the issue in effect on the date of invitation for bids, or request for proposal.

NOTE: Inch units can be converted to soft metric units as follows:

Inch	X	25.4	=	millimeters

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:46Z
Check the source to verify that this is the currentversion before use

INTERCHANGEABILITY TABLE

MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS	MILITARY STD PART NUMBERS	SUBSTITUTIVE PART NUMBERS
MS19083-1	FFB187/03-03	MS19083-26	FFB187/03-86
MS19083-2	FFB187/03-05	MS19083-27	FFB187/03-88
MS19083-3	FFB187/03-07	MS19083-28	FFB187/03-89
MS19083-4	FFB187/03-11	-	-
MS19083-5	FFB187/03-17	-	-
MS19083-6	FFB187/03-29	-	-
MS19083-7	FFB187/03-42	-	-
MS19083-8	FFB187/03-52	-	-
MS19083-9	FFB187/03-58	-	-
MS19083-10	FFB187/03-66	-	-
MS19083-11	FFB187/03-68	-	-
MS19083-12	FFB187/03-72	-	-
MS19083-13	FFB187/03-75	-	-
MS19083-14	FFB187/03-81	-	-
MS19083-15	FFB187/03-34	-	-
MS19083-16	FFB187/03-39	-	-
MS19083-17	FFB187/03-49	-	-
MS19083-18	FFB187/03-56	-	-
MS19083-19	FFB187/03-61	-	-
MS19083-20	FFB187/03-64	-	-
MS19083-21	FFB187/03-67	-	-
MS19083-22	FFB187/03-71	-	-
MS19083-23	FFB187/03-76	-	-
MS19083-24	FFB187/03-78	-	-
MS19083-25	FFB187/03-79	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.