FF-P-419C
March 27, 1970
SUPERSEDING
Fed. Spec. FF-P-419B
April 17, 1963

FEDERAL SPECIFICATION

PIN, NET, LAUNDRY, (5-INCH)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers one type and size of pin for laundry net bags (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-B-613 - Brass, Leaded and Non-leaded; Flat Products (Plate, Bar, Sheet, and Strip)
QQ-W-321 - Wire, Copper Alloy
PPP-B-566 - Boxes, Folding, Paperboard
PPP-B-636 - Box, Fiberboard
PPP-B-676 - Boxes, Setup

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

FSC 3510

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:47Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C. Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Illinois 60606.)

National Motor Freight Traffic Association, Inc.

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

(Technical society and technical associations specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal Agencies.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:47Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2) before production is commenced, a sample pin conforming to this specification shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all the applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Material. Material not definitely specified shall be of the quality normally used by the manufacturer for pins providing the completed item complies with all the provisions of this specification.

3.2.1 Copper Alloy.

3.2.1.1 Sheet and strip. The sheet and strip copper alloy shall conform to copper alloy number 260 or 268 of QQ-B-613 and shall be not less than 0.034 inch thick.

3.2.1.2 Wire. The copper alloy wire shall conform to copper alloy number 260 or 270 of QQ-W-321 and shall be of the diameter specified in figure 1.

3.3 Construction. The construction of the pin shall conform to the requirements specified herein and on figure 1.

3.3.1 Clasp. The clasp shall be constructed of copper alloy specified in 3.2.1.1.

3.3.2 Body. The body of the pin shall be constructed of copper alloy wire specified in 3.2.1.2. The point shall be taper-ground, or swaged and polished, for not less than 3/4 inch from the point. The taper shall be entirely within the clasp when the pin is closed.

3.4 Finish. Prior to finishing, all rough spots, sharp edges, grease, oil, and foreign matter shall be removed. The pins shall have a chromium or nickel finish evenly applied over all surfaces in accordance with the manufacturer's current commercial practice.

3.5 Workmanship. The finished pins shall be free of slivers and unspecified bends in components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:47Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 First article inspection. The preproduction sample shall be examined for defects listed in table I and dimensions specified. The presence of any visual defects or any dimension not within the specified requirements shall be cause for rejection of the preproduction sample.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards, unless otherwise excluded, amended, modified,or qualified in this specification or applicable purchase document.

4.3.1.1 Process examination. Examination shall be made during the manufacturing process to determine compliance with the surface preparation requirements as specified in 3.4. Whenever a deviation is noted, correction shall be made to affected items and process.

4.3.3 End item inspection. A lot shall consist of all pins offered for inspection at one time. The sample unit shall be one completely fabricated pin.

4.3.3.1 Visual examination. Examination of the end item shall be in accordance with the classification of defects listed in table I. The inspection level shall be level I with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:47Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not as specified	X	
Construction and workmanship	Areas of uneven or no coverage	X	
	Not design specified	X	
	Point not taper ground or swaged and polished		X
	Clasp loose on body	X	
	Taper not entirely within clasp when pin is closed	X	
	Rough spot, slivers, sharp edges or unspecified bends		X

4.3.3.2 Dimensional examination. Examination shall be made of the end item for compliance with dimensions specified and on figure 1. Any dimensions not within the specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 6.5 defects, expressed in terms of defects per hundred units.

4.3.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all of the containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

TABLE II. Examination of preparation for delivery

Examination	Defect
Markings, exterior or interior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing or damaged or otherwise defective.
Workmanship	Inadequate application of components such as interior box not compact and well-filled, or bulging or distortion of containers.
Contents	Contents more or less than specified

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:47Z
Check the source to verify that this is the currentversion before use.

4.3.4.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure and strapping shall be in accordance with the appendix of that specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. One hundred pins shall be closed and packaged in a snug-fitting paperboard box conforming to variety 1, style III or VIII, type G, class i of PPP-B-566 or type I, variety 1, class A, style 2 of PPP-B-676. Each box shall be agitated during filling to assure a compact and well-filled box. Each box shall be closed in accordance with the appendix of the applicable box specification.

5.1.2 Level C. Pins shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Six hundred pins, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to grade V2s, style RSC of PPP-B-636. Closure, waterproofing by means of tape, and reinforcing shall be in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Six hundred pins, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.2.3 Level C. Pins, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:47Z
Check the source to verify that this is the currentversion before use.

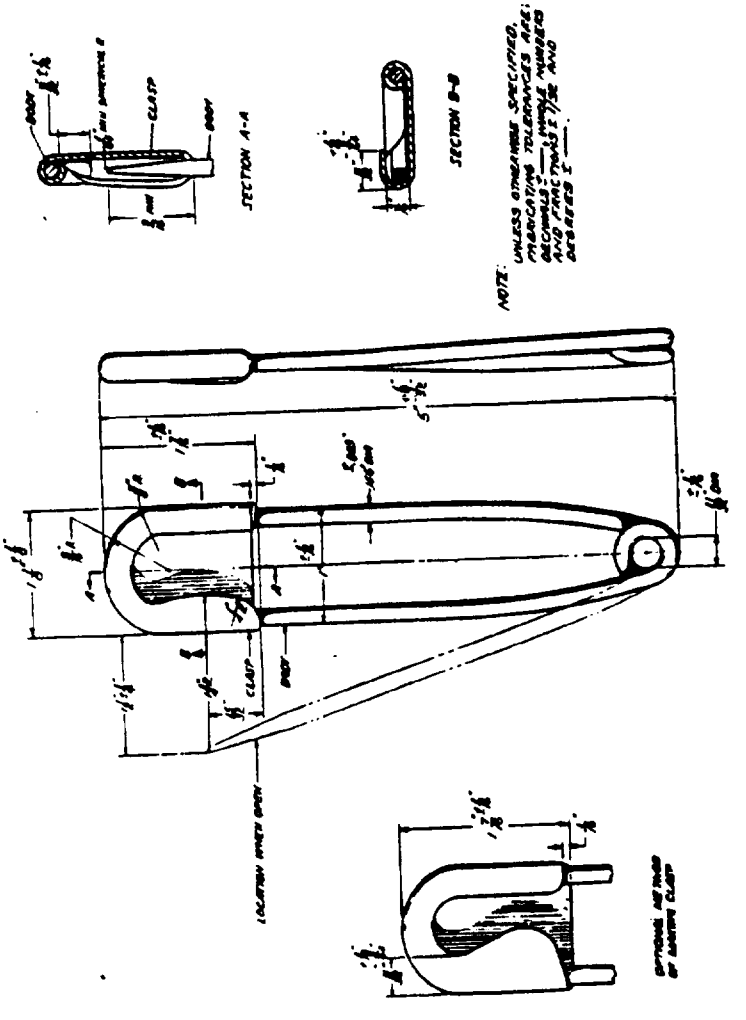


FIGURE 1. Pin, net, laundry, 5-inch.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:47Z
Check the source to verify that this is the current version before use.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The laundry pins covered by this specification are intended for closing laundry net bags. The blunt point precludes the use of these pins for other purposes.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) First article - When a preproduction sample is required (see 3.1)
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

MILITARY CUSTODIANS:

Army - GL
Navy - YD
Air Force - 84

Review activity:

Air Force - 45

Preparing activity:

Army - GL

CIVIL AGENCY INTEREST:

GSA-FSS

Project No. 3510-0185

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:47Z
Check the source to verify that this is the currentversion before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

OFFICIAL BUSINESS



POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-BQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:47Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Pin, Net, Laundry, (5-Inch) FF-P-4190

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:47Z
Check the source to verify that this is the current version before use.