INCH-POUND
FF-S-200C
May 19, 2021
SUPERSEDING
FF-S-200B
August 17, 2004

FEDERAL SPECIFICATION

SETSCREWS: HEXAGON SOCKET AND SPLINE SOCKET, HEADLESS

The General Services Administration has authorized the use of this federal specification by all federal agencies.

1 SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers hexagon socket and spline socket headless setscrews.

1.2 Classification.

1.2.1 Types. Setscrews shall be of the following types, as specified (see 6.2)

Type I - Hexagon socket, headless.
Type II - Spline socket, headless.

1.2.2 Styles. Setscrews shall be of the following styles, as specified (see 6.2):

Style 1 - Flat point.
Style 2 - Cone point.
Style 3 - Oval point.
Style 4 - Cup point.
Style 5 - Full-dog point.
Style 6 - Half-dog point.

Beneficial comments, recommendations, additions, deletions, clarifications, and any other data that may improve this document should be sent to: U.S. Army CCDC, Ground Vehicle Systems Center, ATTN: Standardization, FCDD-GVS-IES, MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or usarmy.detroit.devcom-gvsc.mbx.standardization@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

FSC 5305

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

1.2.3 Size. Setscrews shall be classified by size in accordance with the basic major diameter of the thread (see 6.2).

1.2.4 Length. Setscrews shall be of the length specified in 6.2.

2 APPLICABLE DOCUMENTS

2.1 Government publications. The following documents, of the issues in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

MILITARY SPECIFICATIONS

MIL-F-495	-	Finish, Chemical, Black, for Copper Alloys
MIL-DTL-13924	-	Coating, Oxide, Black, for Ferrous Metals
MIL-DTL-18240	-	Fastener Element, Self-Locking, Threaded Fastener, 250 Degrees F Maximum
MIL-PRF-32647	-	Zinc-Nickel Electroplating for Fasteners

(Copies of these document are available online from https://quicksearch.dla.mil/.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B1.1	-	Unified Inch Screw Threads (UN and UNR Thread Form)
ASME B18.3	-	Socket Cap, Shoulder, Set Screws, and Hex Keys (Inch Series)

(Private sector and civilian agencies may purchase copies of these voluntary standards from American Society of Mechanical Engineers, Two Park Avenue, New York, NY 10016-5990, https://CustomerCare@asme.org.)

AMERICAN SOCIETY FOR QUALITY CONTROL (ASQ)

ASQ Z1.4	-	Sampling Procedures and Tables for Inspection by Attributes

(Private sector and civilian agencies may purchase copies of these voluntary standards from American Society for Quality, P.O. Box 3005, Milwaukee, WI 53201-3005, https://help@asq.org.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM) INTERNATIONAL

ASTM A342/A342M	-	Standard Test Methods for Permeability of Weakly Magnetic Materials
ASTM B36/B36M	-	Standard Specification for Brass Plate, Sheet, Strip, and Rolled Bar
ASTM B633	-	Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel
ASTM B981/B981M	-	Standard Specification for Brass Wire
ASTM E18	-	Standard Test Methods for Rockwell Hardness of Metallic Materials
ASTM E172	-	Standard Practice for Describing and Specifying the Excitation Source in Emission Spectrochemical Analysis
ASTM E1282	-	Standard Guide for Specifying the Chemical Compositions and Selecting Sampling Practices and Quantitative Analysis Methods for Metals, Ores, and Related Materials
ASTM F1941/F1941M	-	Standard Specification for Electrodeposited Coatings on Mechanical Fasteners, Inch and Metric

(Private sector and civilian agencies may purchase copies of these voluntary standards from ASTM Headquarters, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA, https://service@astm.org.)

SOCIETY OF AUTOMOTIVE ENGINEERING (SAE) INTERNATIONAL

SAE AMS2700	-	Passivation of Corrosion Resistant Steels
SAE AMS-H-6875	-	Heat Treatment of Steel Raw Materials
SAE AMS-QQ-P-416	-	Plating, Cadmium (Electrodeposited)

(Private sector and civilian agencies may purchase copies of these voluntary standards from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096, or email at https://customersales@sae.org)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein (except for related specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3 REQUIREMENTS

3.1 Material. Setscrews shall be made of one of the following material as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

3.1.1 Alloy Steel. Alloy steel shall be AISI 4032, 4037, 40L37, 4137, 4140, 41L40, 8630, 8740, in accordance with SAE-AMS-STD-66, which can be heat treated in accordance with SAE-AMS-H-6875 to meet the hardness requirement of 3.3.

3.1.2 Corrosion-resisting steel.

3.1.2.1 Austenitic. Austenitic corrosion-resisting steel shall be of the 300 Series in accordance with SAE-AMS-STD-66 or alloys 316/316L. For superior corrosion resistance in the marine environment, alloys 316/316L shall be specified (see 6.2).

3.1.2.1.1 Magnetic permeability. Austenitic corrosion-resisting steel setscrews shall have a magnetic permeability of 2.0 max (air = 1.0) for a field strength of H = 200 oersteds when using a permeability indicator in accordance with ASTM A342.

3.1.2.2 Martensitic. Martensitic corrosion-resisting steel shall be Steel Nos. 410 or 416 in accordance with SAE-AMS-STD-66.

3.1.3 Brass. Brass shall be in accordance with alloy no. C26000 or C26800 of ASTM B36 or alloy no. C26000, C27000 or C27400 of ASTM B134.

3.2 Protective finishes. Unless otherwise specified in the contract, setscrews shall be furnished uncoated. When specified (see 6.2), protective finishes shall be as follows.

3.2.1 Plating/coating. When plating is required for setscrews of 48 pitch or finer, the thickness may be reduced to .0001 inch minimum thickness. Hydrogen embrittlement relief treatment is mandatory for plating (see 3.2.4). When specified in the procurement documents, plate/coat the fastener in accordance with the following:

a. Cadmium – SAE AMS-QQ-P-416/1, Type II, class 3
b. Zinc-Nickel – MIL-PRF-32647, Type K16
c. Zinc-Nickel – MIL-PRF-32647, Type K20
d. Zinc – ASTM B633 Fe/Zn 12 Type II/2
e. Zinc (hex free passivation) – ASTM F1941/F1941M Fe/Zn 12 AN
f. Nickel – SAE-AMS-QQ-N-290

/1 Cadmium is an R1, R2, and D1 substance in the Aerospace and Defense Declarable Substance List. Zinc-Nickel plate per MIL-PRF-32647, Type K16 is a suggested alternate.
/2 Type II passivation per ASTM B633 contains hexavalent chromium which is an R1, R2, and D1 substance in the Aerospace and Defense Declarable Substance List. Zinc with hex free passivation per ASTM F1941/F1941M Fe/Zn 12 or Zinc-Nickel plate per MIL-PRF-32647 Type K20 are suggested alternates.

3.2.2 Passivation. Corrosion-resisting steel setscrews shall be passivated in accordance with SAE-AMS-QQ-P-35.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

3.2.3 Black oxide.

3.2.3.1 Brass. Brass setscrews shall be treated with a black chemical in accordance with MIL-F-495.

3.2.3.2 Corrosion-resisting steel. Corrosion-resisting steel setscrews shall be black oxide coated in accordance with MIL-DTL-13924, class 4.

3.2.4 Hydrogen embrittlement. Hydrogen embrittlement relief for zinc plated alloy steel setscrews shall be provided in accordance with ASTM B633. Cadmium plated alloy steel setscrews shall be subjected to an embrittlement relief treatment in accordance with SAE-AMS-QQ-P-416 after plating to minimize the resulting embrittlement.

3.3 Hardness. Alloy steel setscrews shall be hardened by quenching in oil from the hardening temperature and tempered to a hardness of Rockwell 45-53 HRC. Martensitic corrosion-resisting steel setscrews shall be hardened by heat treatment to Rockwell 35-45 HRC. Austenitic corrosion-resisting steel setscrews shall have a hardness of Rockwell 96 HRB – 33 HRC and brass alloy setscrews shall have a hardness of Rockwell 55 – 80 HRF.

3.3.1 Decarburization. The complete end partial decarburization of the threads of heat-treated setscrews shall not exceed the amounts shown in Figure 1 or the amount for such other class as may be specified in the contract or order. A carbon content throughout the threads equivalent to that of the core is desirable.

3.4 Design.

3.4.1 Dimensions. Dimensions and tolerances of setscrews shall be in accordance with ASME B18.3. For acceptable designs of cup points for military use, see applicable Military Specification sheet.

3.4.2 Threads. Unless otherwise specified (see 6.2), the threads shall be class 3A in both UNC and UNF series in accordance with ASME B1.1.

3.4.3 Self-locking element. When specified (see 6.2) non-metallic, self-locking elements shall be in accordance with MIL-DTL-18240.

3.5 Workmanship. Setscrews shall be free from burrs, seams, laps, loose scale, irregular surfaces and any other defects which may affect serviceability. Unless otherwise specified (see 6.2), broach petal (chips) are acceptable provided they will not affect serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

4 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. The contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may use his own or any other facilities suitable for the inspection requirements specified herein, unless disapproved by the Government. Inspection records of the examination and tests with itemized results shall be kept complete at the manufacturer's facility, available to the Government throughout the duration of the contract, or a minimum of two years, whichever is longer. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in this document shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in application referenced documents.

4.1.3 Examination of preparation for delivery. An examination shall be made to determine that the packaging, packing and marking comply with the requirements in Section 5 of this specification.

4.2 Inspection provisions.

4.2.1 Lot. A Lot shall consist of all setscrews of the same type, style, material, protective finish, size and thread produced under essentially the same conditions and offered for acceptance at one time.

4.2.2 Sampling for examination. A random sample of setscrews shall be taken from each lot in accordance with QSC Z1.4, Inspection Level II. The Acceptable Quality Level (AQL) shall be as specified in Table I. Unless otherwise specified, the AQLs listed in this inspection shall be used to establish the sample size, however, the acceptance number shall be zero.

4.2.3 Sampling for hardness and decarburization tests. A random sample of setscrews shall be taken from each lot in accordance with QSC Z1.4, Inspection Level S-1, with an AQL of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

1.0 percent defective for hardness test. Three (3) of these hardness test setscrews sample shall be subjected to decarburization test as specified in 4.4.2.

4.2.4 Sampling for protective finish tests. Sampling for tests of protective finishes shall be in accordance with the applicable specifications in 3.2.

4.2.5 Sampling for chemical analysis. When specified (see 6.2), a random sample of setscrews shall be taken from each lot in accordance with QSC Z1.4, Inspection Level S-1, with an AQL of 1.5 percent defective. Samples previously selected for examination or for the hardness and decarburization tests may be used.

4.3 Examination. Each setscrew taken as specified in 4.2.2 shall be examined to verify conformance with this specification. Examination shall be conducted in accordance with Table I. Any setscrew in the sample containing one or more defects shall be rejected and if the number of defective setscrews in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected. Short setscrews, passing through the no/go gage, shall not cause for rejection, providing the screws have less than six threads (including the start thread) and the major diameter shall not be undersize by more than 0.003 inch.

TABLE I. Classification of defects.

Categories	Defects	Inspection Method
Critical	None defined	
Major	AQL = 2.5	
101	Thread	SIE /1
102	Socket dimensions	SIE
Minor	AQL = 4.0	
201	Magnetic permeability (3.1.2.1.1)	SIE
202	Applicable point dimensions	SIE
203	Setscrew length	SIE
204	Chamfer angle	SIE
205	Eccentricity	SIE
206	Workmanship (3.5)	Visual

/1 SIE = Standard Inspection Equipment

4.4 Tests.

4.4.1 Hardness. Each setscrew taken as specified in 4.2.3 shall be subjected to a hardness test conducted in accordance with ASTM E18.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

a. Setscrews having a length of 2 diameters or longer shall be tested on a transverse section through the threads at a point one-quarter of the nominal diameter from the axis and one nominal diameter from the point.
b. Setscrews having a length less than 2 diameters shall be tested on a transverse section through the threads at a point one-quarter of the nominal diameter from the axis and located at the first full thread from the point.
c. Setscrews having nominal diameters of 1/4” and larger shall be tested using the Rockwell C Scale. For sizes smaller than 1/4” the Rockwell 30N Scale shall be used.

4.4.2 Decarburization. Each setscrew taken as specified in 4.2.3 shall be subjected to a decarburization test conducted as follows: The threaded part of the setscrew shall be sectioned longitudinally through the axis and polished so that rounding of the thread edges is held to a minimum. The section shall be etched with the usual metallographic etchants (such as Nital) and examined with a metallurgical microscope. Measurements shall be made from the crest of the thread to the end of the decarburized zone. This distance shall not exceed that indicated in Figure 1. Measurements shall be made with a fixed-scale micrometer eyepiece. This test does not apply to austenitic corrosion-resisting steel and brass alloy.

4.4.3 Protective finish. Protective finish tests shall be conducted in accordance with the applicable specifications in 3.2.

4.4.4 Chemical analysis. Each setscrew selected as specified in 4.2.6 shall be subjected to a chemical analysis conducted in accordance with ASTM E172 or ASTM E1282, to verify conformance to the applicable material specification. A steel mill certification will be acceptable in lieu of this test.

4.4.5 Hydrogen embrittlement. The contractor shall furnish the Government certification that cadmium plated or zinc plated alloy steel setscrews have been subjected to the embrittlement relief treatment specified in 3.2.4.

5 PACKAGING

5.1 Packaging requirements. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point’s packaging activities within the Military Service or Defense Agency, or within the military service’s system commands. Packaging data retrieval is available from the managing Military Department’s or Defense Agency’s automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

6 NOTES

INFORMATION FOR GUIDANCE ONLY. (This section contains information of a general or explanatory nature that is helpful, but is not mandatory.)

6.1 Intended use. Setscrews covered by this specification are intended to be used to locate machine parts in relation to each other, either permanently or temporarily. It is recommended that cup point setscrews, style 4, be used wherever possible. For hardened shafts or when the cutting in of the cup point is objectionable, styles 1 or 6 should be used. It is recommended that styles 2, 3 or 5 be used only when it is impractical to use the other styles.

6.2 Acquisition data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this specification.
b. Type, style, size, length, thread series and class (1.2).
c. Material (3.1).
d. Protective finish, if required (3.2).
e. Self-locking feature, if required (3.4.3).
f. Chemical analysis, when required (4.2.5).
g. Broach petals removal, if required (3.5).
h. Packaging requirements (see 5.1)

6.3 Military procurement. Items procured under this specification for military use are to be limited to the variety shown on the applicable Military Standards. Personnel of Military departments are requested to refer to these documents for guidance.

6.3.1 Inspection methods. Inspection methods A, B and C have been eliminated. For new inspection criteria Safety Critical and Other application categories apply.

6.3.2 Calibration of gages. Gages used for demonstrating compliance should be calibrated in accordance with MIL-STD-45662 or FED-STD-H28/20.

6.3.3 Preferred selection. Due to limitations in the ability to verify some characteristics, internal threads of nominal size 0.190 inches and less should not be selected for safety critical applications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.


6.4 Supersession data. Cross reference between the types and styles of setscrews covered in part by this specification and FF-S-210, and the types and styles of the superseded FF-S-103, dated October 7, 1958, is as follows:

TABLE II. Cross reference data.

FF-S-1O3	FF-S-210	FF-S-200
Types	Types	Types
Type I - Square Head	Type I - Square Head	---
Type II - Slotted Headless	Type II - Slotted Headless	---
Type III - Hexagon Socket, Headless	---	Type I - Hexagon Socket, Headless
Type IV - Fluted Socket, Headless	---	Type II - Spline Socket, Headless
Styles	Styles	Styles
Style 1 - Flat point	Style 1 - Flat point	Style 1 - Flat point
Style 2 - Cone point	Style 2 - Cone point	Style 2 - Cone point
Style 3 - Oval point	Style 3 - Oval point	Style 3 - Oval point
Style 4 - Cup point	Style 4 - Cup point	Style 4 - Cup point
Style 5 - Full-dog point	Style 5 - Full-dog point	Style 5 - Full-dog point
Style 6 - Half-dog point	Style 6 - Half-dog point	Style 6 - Half-dog point

6.5 Changes from previous issue. Vertical lines are used in this revisions to identify.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

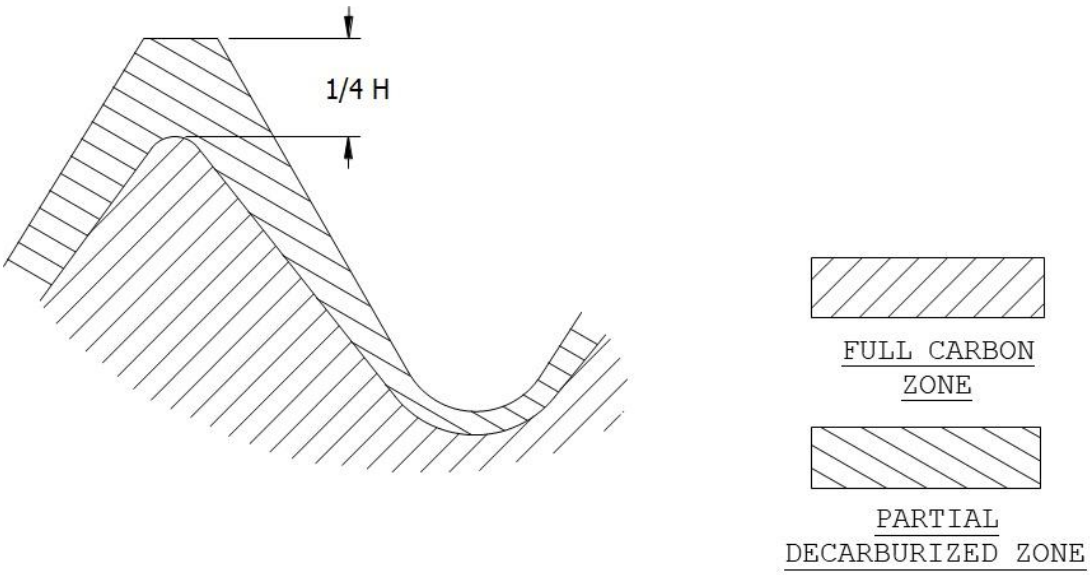

Thds per inch	1/4 H
80	.002
72	.002
64	.003
56	.003
48	.003
44	.004
40	.004
36	.005
32	.005
28	.006
24	.007
20	.008
18	.009
16	.010
14	.012
13	.012
12	.014
11	.015
10	.016
9	.018
8	.020
7	.023
6	.027

(1/4 H - l/4 Basic Thread Depth)

Figure 1. Decarburization limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AT
Navy - SH
Air Force - 71
DLA - GS

Reviewers:
Army - AV, CR4, EA, MI
Navy - AS, MC, OS, YD

Preparing activity:
AT

(Project 5305-2021-002)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:46Z
Check the source to verify that this is the current version before use.