MILITARY STANDARD

MIL-STD-1323-97B
(NAVY)
17 JUNE 1993

SUPERSEDING MIL-STD-1323-97A
11 JANUARY 1988

UNIT LOAD

FOR UNDERWAY REPLENISHMENT DISPENSER AND BOMB, AIRCRAFT MK 20 AND MODS, CBU-100/B,-100A/B,-99/B,-99A/B (ROCKEYE) AND CBU-78/B,-78A/B (GATOR) IN CONTAINER, CNU-319/E

UNIT LOAD DATA

DISPENSERS PER CONTAINER	2
CONTAINERS PER UNIT LOAD	2
DISPENSERS PER UNIT LOAD	4
GROSS WEIGHT OF ONE CONTAINER	1513 LBS.
WEIGHT OF STRAPPING	3 LBS
GROSS WEIGHT OF UNIT LOAD	3029 LBS. △
CUBE	82.2 CU FT


CONTAINER DIMENSIONS: (DWG. 1248AS100)

LENGTH	102 1/8
WITH	36 1/8
HEIGHT (OVERALL)	19 1/2
(STACKING)	19

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN
4 UNIT LOADS HIGH IN STORAGE

FOR HAZARD CLASSIFICATION
SEE SW020-AC-SAF-010/020/030

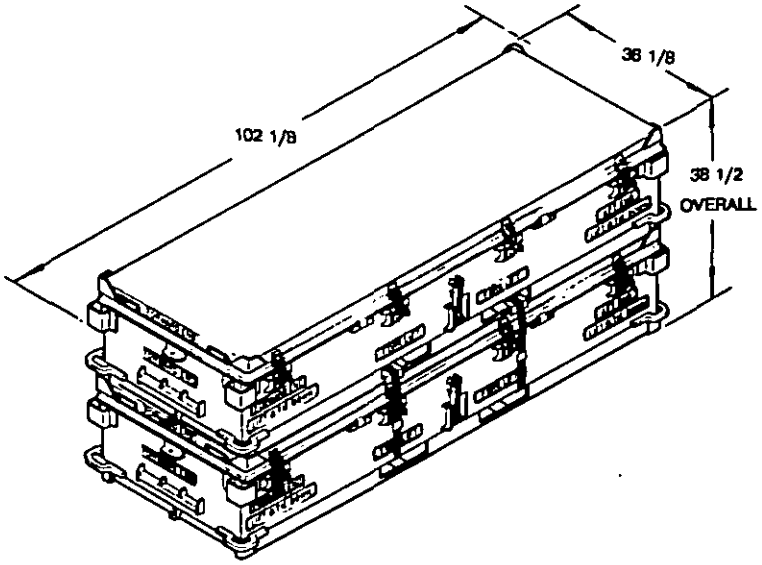

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCK-LOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS MIL-HDBK-238 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	APPROVAL TDA	APPROVAL SYSCOM
B	UPDATED SH 1 & 2	6-5-13	[illegible]	[illegible]
A	ADD GATOR	1-11-88	[illegible]	[illegible]

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

[illegible] 1/21/50
TECHNICAL DIRECTION AGENT (TDA) DATE

A.E. Reilly 1/21/50
AIRSYSCOM BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR [illegible] 1/21/50
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE


(A) STACK TWO CONTAINERS, SO THAT THE TOP CONTAINER IS ENGAGED WITHIN THE STACKING ANGLES.

(B) PLACE EDGE PROTECTOR, ITEM 3, ON FORK POCKETS OF TOP CONTAINER AS SHOWN.

(C) THREAD STRAPPING, ITEM 1, THROUGH FORK POCKETS OF TOP AND BOTTOM CONTAINERS AND OVER THE EDGE PROTECTORS. TENSION AND DOUBLE NOTCH SEALS ITEM 2.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129.

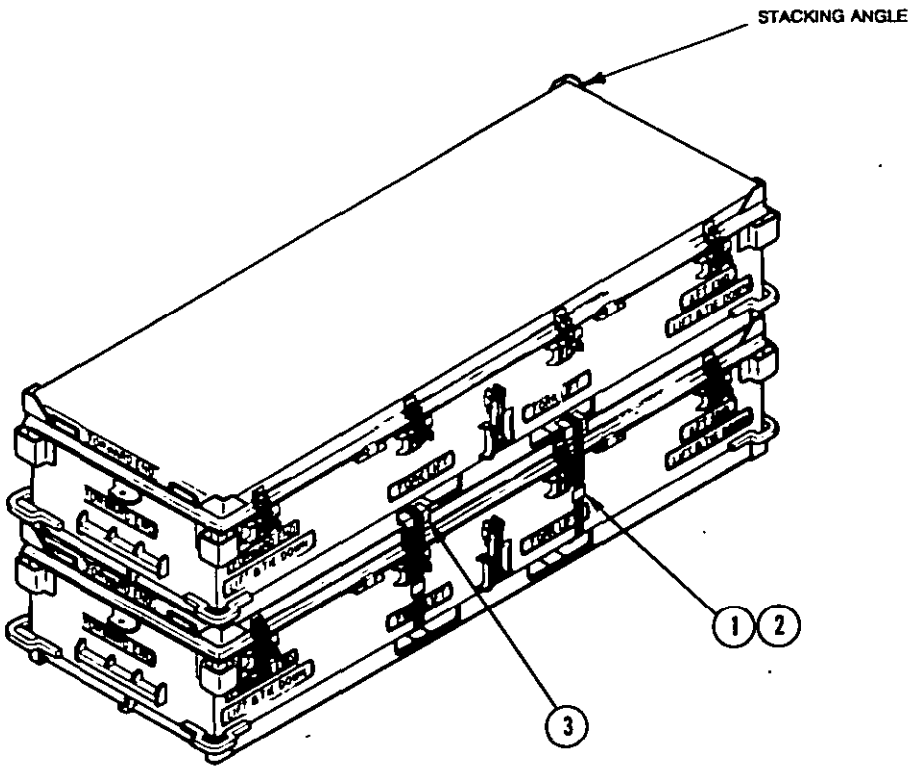

NOTES:
1. UNLESS OTHERWISE SPECIFIED, ALL MATERIAL SHALL BE IAW THE GENERAL DOCUMENT MIL-STD-1323 (NAVY).
2. RIBBED EDGE PROTECTORS WITH MINIMUM .042 INCH THICKNESS AND MINIMUM 2 INCH LENGTH OF LEGS, DESIGNED FOR USE WITH 1 1/4 INCH WIDTH STRAPPING MAY BE SUBSTITUTED.

DEUNITIZING PROCEDURE

(A) CUT AND REMOVE STRAPPING.

(B) REMOVE EDGE PROTECTORS.

(C) REMOVE TOP CONTAINER.

REQ	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	3	EDGE PROTECTOR	NSN 8135-00-291-0962	SEE NOTE 2
2	2	SEAL	STEEL	FOR 1 1/4 STRAPPING
2	1	STRAPPING	STEEL	1 1/4 X .035 X 9 FT 6

LIST OF MATERIALS

REVIEW ACTIVITY:
NAVY-AS

PREPARING ACTIVITY:
NAVY-OS

(PROJECT NO. 8140-0107)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.