MIL-C-13998H(GL)
17 March 1982
SUPERSEDING
MIL-C-13998G(GL)
12 June 1975

MILITARY SPECIFICATION

CAP, SERVICE, WOOL, ARMY GREEN 44

This specification is approved for use by US Army Natick Research and Development Laboratories, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a service cap made of wool, or polyester and wool material.

1.2 Classification. The cap shall be of one type in the following sizes (see 6.2):

Type I - Wool Serge or Polyester and Wool Serge Shade Green 44
Type II - Polyester and Wool, Serge, Army Green, 344

Schedule of sizes

6-3/8	7-1/4
6-1/2	7-3/8
6-5/8	7-1/2
6-3/4	7-5/8
6-7/8	7-3/4
7	7-7/8
7-1/8	

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document of by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

H-S-951	-	Synthetic Filaments for Brushes; General Specification for
L-P-375	-	Plastic Film, Flexible, Vinyl Chloride
L-P-390	-	Plastic, Molding and Extrusion Material, Polyethylene and Copolymers (Low, Medium, and High Density)
V-T-276	-	Thread, Cotton
V-T-295	-	Thread, Nylon
UU-P-553	-	Paper, Wrapping, Tissue
CCC-C-432	-	Cloth, Sheeting, Cotton, (Unbleached, Bleached, and Dyed)
DDD-L-20	-	Label; for Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing

MILITARY

MIL-C-368	-	Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-593	-	Braid, Textile (Flat)
MIL-C-823	-	Cloth, Serge, Wool; Wool and Nylon, Polyester and Wool
MIL-B-3461	-	Buttons, Insignia, Metal, Uniform and Cap
MIL-S-3577	-	Sweatband, Headwear, Leather
MIL-C-41831	-	Cloth, Nylon, Knitted, Raschel
MIL-L-43541	-	Leather, Cattlehide, for Visors and Chinstraps
MIL-C-43548	-	Thread, Polyester, Cotton-Covered
MIL-C-43675	-	Cloth, Interlining, Cotton Warp and Rayon Filling
MIL-C-43920	-	Cloth, Interlining, Cotton or Synthetic, and Nylon
MIL-S-43993	-	Sweatband, Headwear: Artificial Leather

STANDARDS

FEDERAL

FED-STD-151	-	Metals; Test Methods
FED-STD-191	-	Textile Test Methods
FED-STD-311	-	Leather Methods of Sampling and Testing
FED-STD-406	-	Plastics: Methods of Testing
FED-STD-601	-	Rubber: Sampling and Testing
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-657	-	Provisions for Evaluating Quality of Service Caps

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

U.S. Postal Service Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

AMERICAN SOCIETY FOR TESTING AND MATERIAL (ASTM)

D 374-68 Thickness of Solid Electrical Insulation, Tests for

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Samples.

3.1.1 Approval of sample for sealing as standard of supplier's quality. At the time of submission of bid, or after bids have been opened, bidders will be required to submit two preaward samples (except that for bidders who have already had samples

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

of their quality approved and sealed within the preceding two years, this requirement will be waived). Materials for the fabrication of the samples will be furnished by the Government at nominal cost unless otherwise stated in the invitation for bid. The purpose of the above requirement is to assist the Government in determining the capability of bidders to manufacture a garment of the quality called for by the specification, and to establish a sealed sample of quality which the supplier is committed to deliver. The acceptance and sealing of this sample under this requirement shall not be construed as relieving a supplier from subsequently meeting all requirements of the specification on all deliveries.

3.1.2 Guide sample. Samples, when furnished, are solely for the guidance and information to the supplier (see 6.3). Variation from the specification may appear in the sample, in which case this specification shall govern.

3.2 Materials.

3.2.1 Basic material.

3.2.1.1 Type I cap. The basic material shall be 15-ounce wool serge or 14-ounce polyester and wool serge shade Army Green 44, conforming to type I, class 5 or type III, class 1 of MIL-C-823.

3.2.1.2 Type II cap. The basic material shall be 11.3-ounce polyester and wool serge cloth, Army Green 344, conforming to type III, class 3 of MIL-C-823.

3.2.2 Lining. The lining for crown of cap and covering front stay shall be 3.7 ounce rayon, Gold color No. 68, conforming to class 1 of MIL-C-368.

3.2.3 Bias tape. The bias tape for the crown seam shall be made from cotton sheeting conforming to type VII or VIII, class 3 of CCC-C-432, except that the sheeting shall contain not less than 6.0 percent starch and protein content including chloroform-soluble and water-soluble material; the colorfastness requirements for light and combined laundering and bleaching shall not apply; the seam efficiency test shall not apply and the shrinkage shall not exceed 6.0 percent in the warp or filling. The sheeting shall be dyed to approximately the shade of the lining fabric or the bias tape may be made from lining material specified in 3.2.2.

3.2.4 Crown protector and binding. The crown protector and binding (oper. 10b and 14b) shall be a neutral color waterproof flexible film, 0.004 $\pm$ 0.0004 inch thick, conforming to type II, class 1 of L-P-375.

3.2.5 Pressed fiber. The material for the sweatband welt shall be pressed fiber, 1.5 to 2.0 ounces per square foot, 0.015 to 0.020 inch thick, in a natural, red, or black color. Testing shall be as specified in 4.2.1.

* 3.2.6 Front quarter stiffener. The material for the front quarter stiffener shall be raschel knitted nylon cloth conforming to MIL-C-41831.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

3.2.7 Crown seam tape interlining. The crown seam tape interlining shall be natural or dyed nylon mesh, knitted on a single needle bar rachel and weighing 6.5 ± 0.5 ounces per square yard. The stiffness of the finished cloth shall be as follows when tested as specified in 4.2.1.

	Stiffness, load pounds	
	Minimum	Maximum
Two-inch specimen; length parallel to wales	0.025	0.045
Two-inch specimen; length across or perpendicular to wales	0.040	0.060

3.2.8 Material for inner body band. The inner body band shall be of high density (linear) polyethylene plastic material meeting the requirements of type III, class H, grades 1 or 2 of L-P-390 except that low-temperature brittleness, dielectric constant, dissipation factor and thermal-stress cracking resistance properties shall not apply (see 6.5). The bands shall be extruded, stripped, split or cut 2 ± 1/16 inches wide, with a thickness of 0.030 ± 0.002 inch. At least one side of the material shall have a dull finish. Testing shall be as specified in 4.2.1.

3.2.8.1 Punching or perforating. The band shall be perforated by punching or other means in a repetitive pattern as approximated by the standard sample (see 6.3) with the diameters of the holes as shown by the standard sample. Not less than a 3/8-inch margin at top and bottom of band shall remain unperforated.

3.2.8.2 Stiffness. The perforated bands shall have a stiffness (scale reading) between 11 and 27 inclusive when tested as specified in 4.2.1.

3.2.8.3 Bending. The perforated band material shall show no cracks after the bending test specified in 4.2.1.

3.2.9 Thread. The cotton thread for seaming and stitching the caps shall conform to V-T-276 as indicated below. The thread for felling the sweatband shall be nylon thread, dyed Army Green E, C.A. 66034, conforming to type IV, size C of V-T-295. Polyester, cotton-covered thread, ticket number 50, 2-ply conforming to MIL-T-43548 may be substituted for cotton thread, ticket number IA3 of V-T-276.

Use	Color	Type	Ticket No.	Ply
Seaming and stitching	Army Green E, C.A. 66034	IB3	16 or 20	4 (top thread)
		IA3	20	4 (bottom thread)
		IC2	A	3
	Brown (matching sweatband)	IC2	A	3
	Goldenlite AJ, C.A. 66051	IC2	A	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

Use	Color	Type	Ticket No.	Ply
Seaming and stitching visor and chinstrap	Black AA, C.A. 66043	IB3 IA3	36 36	4 (top thread) 4 (bottom thread)

3.2.9.1 Colorfastness. The dyed thread shall show fastness to light and wet drycleaning equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to light and wet drycleaning.

3.2.10 Sweatband. The leather for sweatband shall be 1-1/4 ± 1/8 inches wide, dyed a brown shade and shall conform to requirements of MIL-S-3577 or as an alternate, artificial leather material conforming to MIL-S-43993 may be used. Testing shall be as specified in 4.2.1.

3.2.10.1 Punching or perforating. The sweatband shall be perforated by punching or other means in a repetitive pattern with the holes measuring 3/32 (0.094) and 1/16 (0.0625) inch in diameter. There shall be 5 to 6 of the larger holes and 25 to 30 of the smaller holes per three inches of liner band and not less than a 3/16-inch margin at top and bottom of band shall remain unperforated. Testing shall be as specified in 4.2.1.

* 3.2.11 Braid. The braid for the cap shall be mercerized cotton, flat skipweave, in shade Army Green 49, conforming to type III, class 1 of MIL-B-593.

* 3.2.12 Visor. The visor shall consist of two pieces of leather, the top piece being black and the bottom piece being hatter's green, (see 6.4) with the outside edge bound with a plastic strip conforming to the following requirements when tested as specified in 4.2.1.

3.2.12.1 Top piece. The top piece shall be 3.0 to 4.5 ounce cattlehide conforming to type I of MIL-L-43541.

3.2.12.2 Bottom piece. The bottom piece shall be 5.5 to 7.0 ounces cattlehide conforming to type II of MIL-L-43541.

3.2.12.3 Binding. The binding strip shall be made from black vinyl chloride flexible plastic film, 0.012 inch thick, having a smooth finish approximate to the finish of the top leather piece conforming to type I, class 2 of L-P-375. The binding shall finish 3/16 to 1/4 inch in width on top and bottom of visor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

* 3.2.12.4 Fabrication. The visor shall be cut in strict accordance with patterns furnished. The two pieces shall be laminated with latex or flexible glue. The two pieces shall then be placed together and pressed. The strength of the bond between the top and bottom layers shall be not less than 0.6 pound per inch. The stiffness of the visor shall require a force of not less than 1/2 pound to bend it through anleg of 20°. The inside edge of the bottom layer of the visor shall be skived. The outside edge of visor shall be trimmed, sanded, and bound and stitched 1/32 ± 1/32, - 0 inch from folded edge of binding strip on top of visor with cotton thread as specified in 3.2.9 with 8 to 10 stitches per inch, using stitch type 301, seam type BSb-1 of FED-STD-751. The visor shall be molded with heat into a curved shape as shown by the standard sample.

3.2.13 Leather for chin straps. The leather shall be 3.0 to 4.0 ounces conforming to type I of MIL-L-43541.

* 3.2.13.1 Construction of chin straps. The edges of the strap shall be stained black (see 6.4) and the face finished with a neatly embossed line 1/16 to 1/8 inch from edge. The edge of the loops shall be stitched with cotton thread as specified in 3.2.9, with stitch type 301 and seam type SSa-2, on loop for top section and seam type OSa-2 on loop for bottom section with 8 to 12 stitches per inch and the stitching need not be backtacked. The dimensions of the strap shall conform in all respects to figure 3. One end of each strap shall be provided with an aperture, the center of which shall be equidistant from the sides and 5/16 ± 1/32 inch from the end of the strap. The opposite end of each section shall be provided with a 7/8 ± 1/16 inch loop, which shall be cut in one piece. The loop for the top section shall be stitched 1/16 inch from each edge, continuing across wide center area of loop in two parallel rows of stitching, catching the top section in both rows of stitching. The ends of the loop shall be folded over the sides of the top section and, with the ends abutted, shall be closed with two non-corrosive staples (see 3.2.20.1), forming a loop for the bottom section. The loop for the bottom section shall be made the same as the top section except that after abutting the ends of the loop, the bottom section shall be caught by the two staples. Each section shall be made the same length so that when the strap is assembled, the front edge of the loops shall be the same distance from the center of the buttons on each side of the cap (figure 3).

3.2.14 Labels. Each cap shall have a stamped size label, a cloth combination identification-size label, and a cardboard instruction label.

3.2.14.1 Stamped size label. The stamped size label shall conform to type IV, class 2 of DDD-L-20, except that only the size shall be designated. The fastness to drycleaning requirements of DDD-L-20 shall apply.

3.2.14.2 Identification-size label. The combination identification-size label shall conform to type I, class 4 of DDD-L-20. The fastness to drycleaning requirements of DDD-L-20 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

3.2.14.3 Cardboard instruction label. The printed cardboard instruction label of commercial type shall be attached by a string not less than 12 inches in length, looped through a hole 1/4 inch in diameter (see figures) and shall be attached to one of the chin strap buttons. The label shall measure 4 by 3 inches. The text of the label shall be as shown on figure 5, printed on one side only, in letters not less than 1/8 inch in height.

3.2.15 Buttons. The buttons for affixing the chin strap shall be metal, cap, screwback, gold plated, 25-line, conforming to type II, style 2, class A of MIL-B-3461.

3.2.16 Eyelets. The eyelets shall be brass, conforming to the dimensions shown on figure 4 except the front eyelet shall have a barrel length of 0.250 to 0.285 inch. Prior to coating, the eyelets shall be thoroughly cleaned and degreased. The brim or flange shall be enameled black. Testing shall be as specified in 4.2.1.

3.2.17 Washers. The washer for backing the front insignia eyelet shall be brass and shall fit over the eyelet barrel to insure a secure clinch of the eyelet. Testing shall be in accordance with 4.2.1.

3.2.18 Sweatband reinforcement strip. The reinforcement piece shall be a strip of coated or uncoated print cotton cloth or sheeting 5/8 to 3/4 inch in width.

* 3.2.19 Front stay. The front stay shall consist of a commercial twin wire tape stiffener, one ply of undyed stiff crinoline and one ply of cotton warp and rayon filling cloth or two plies of monofilament filling cloth. The stay shall be covered with rayon lining material specified in 3.2.2. The stay components shall meet the following requirements when tested as specified in 4.2.1.

3.2.19.1 Twin wire tape stiffener. The twin wire tape shall measure 1 inch wide. The steel wire used in the tape shall be hard rolled, cold finished carbon steel, galvanized, flat wire, and shall be 0.016 $\pm$ 0.002 inch thick by 0.090 $\pm$ 0.004 inch wide.

3.2.19.2 Crinoline. The crinoline (when used) for front stay shall be an undyed commercial crinoline, weighing 1-1/2 to 2-1/2 ounces per square yard finished, with not less than 25 yarns per inch in the warp and filling.

3.2.19.3 Cotton warp and rayon filling cloth or monofilament filling cloth. The cotton warp and rayon filling cloth for front stay shall conform to MIL-C-43675. When the alternate monofilament filling cloth is used, the fabric shall conform to type I of MIL-C-43920.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

3.2.20 Staples. The staples shall be stamped from steel wire 0.025 inch ± 0.0005 inch thick. The wire shall be steel, monel metal, brass or stainless steel. If ordinary carbon steel is used, it shall have a non-corrosive finish capable of withstanding not less than 25 hours of the salt spray test.

* 3.2.20.1 Staples for closing loops of chin strap. The staples for closing loops of the chin strap shall have an overall width of 1/4 to 3/8 inch and have divergent prongs 1/4 ± 1/64 inch in length.

3.2.20.2 Staples for button post. The staples for fastening the bottom of the screw post to inner body band shall be heavy duty flat, standard clinch 0.05 inch wide, 0.025 inch thick, 1/4 ± 1/16 inch long leg, 1/2 inch wide crown.

* 3.2.20.3 Staples for securing front welt and ends of stitching thereon. The staples for securing the front welt and ends of stitching thereon shall be flat measuring 1/4 ± 1/64 inch wide by 3/8 ± 1/64 inch leg, 0.0018 ± 0.00003 inch wide by 0.0054 ± 0.0009 inch thick and shall be finished black.

3.2.21 Crown support. The crown support shall consist of a steel wire inclosed in a nylon grommet conforming to the following requirements when tested as specified in 4.2.1.

* 3.2.21.1 Steel wire. The steel wire shall be spring steel 5/16 ± 1/16 inch wide and 0.020 ± 0.005 inch thick, cut to required size to fit snugly, without distortion to the cap. The wire shall be completely covered with white ethyl cellulose, cellulose propionate or cellulose acetate propionate coating. The coupling shall be 1 ± 1/8 inches long and zinc or cadmium coated to withstand 25 hours of the salt spray test.

3.2.21.2 Nylon grommet. The grommet shall be composed of nylon filling yarns and cotton warp yarns braided to form a grommet, approximately 3/4 inch in diameter. The filling yarns shall be of clear nylon monofilament, 0.012 ± 0.0005 inch thick in diameter conforming to class N, type II of H-S-951, except the cut length designation shall not apply. The warp yarns shall be 12 ± 1/2 count singles carded cotton. The grommet shall be made on a 44 or 48 carrier braider, with carriers braiding in pairs with a 1/1 weave with one 0.012 inch diameter nylon monofilament end per carrier; or a 24 carrier braider with carriers braiding in pairs on a 1/1 weave with two 0.012 inch diameter nylon monofilament ends per carrier. Not less than eight warps of 2 ends each of cotton yarn shall be intermittently spaced around the circumference interlacings. There shall be not less than 8 picks per inch in the relaxed state. The ends of the grommet shall be joined by the use of wood or cork plugs, laminated paper rings, or other suitable material to insure proper closure of the grommet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

* 3.3 Design. The cap shall consist of three side pieces and a top crown piece with plastic crown protector. The cap shall have a lined crown and have a loosely woven braid band. The cap shall be provided with a removable grommet, a leather visor, an adjustable chin strap, a perforated sweatband and a permanently attached front stay. The front of the cap shall be vertical.

* 3.4 Figures. Figures 1 and 2 are furnished for information purposes only. If there are any inconsistencies between the specification and the figures, the specification shall control.

3.5 Patterns. Standard patterns, which provide an allowance of 1/4 inch for all seams, except the back seam of the 1 inch band and braid which shall be 3/8 inch, will be furnished by the Government to the supplier for cutting working patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

* 3.5.1 List of pattern parts. The cap shall be cut from the specified materials in accordance with the pattern parts required as shown in table I.

TABLE I. List of pattern parts

Material	Nomenclature of pattern parts	Cut parts
Wool, serge or polyester and wool serge	Crown	1
	Front	1
	Side (quarters)	2
	Welt for visor	1
Rayon lining cloth	Crown	1
	Front stay	1
Cotton warp and rayon filling cloth or monofilament filling cloth	Front stay	1
Crinoline	Front stay	1
Raschel knitted nylon cloth	Front stiffener	1
Leather; as specified	Visor (to show size and shape)	1
Polyethylene film 0.0040 inch thick	Crown protector (see oper. 6a)	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

3.6 Construction.

* 3.6.1 Stitches, seams, and stitching. Stitch, seam, and stitching types, specified in table II are those covered by FED-STD-751. When two or more seams or stitch types are given for the same part of an operation, any one of them may be used. When stitch type 401 is used, the looper thread shall be on the inside of the cap. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitching produced with 301 stitch type, when not caught in other seams or stitching shall be back-tacked not less than 1/4 inch. Ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 or 101 stitch type) may be repaired using 301 stitch type.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

* 3.7 Manufacturing operation requirements. The caps shall be made in accordance with operation requirements specified in table II. The supplier is not required to follow the exact sequence of operations with exceptions of operations 17 through 19 which shall be performed on the completed cap as the last three operations. Any additional basting or holding stitches used to facilitate manufacture, are permissible provided that the thread is removed or does not show on the finished cap.

3.7.1 Pressing. All pressing referenced in table II shall be accomplished with a heated pressing iron or machine, except blocking which shall be accomplished as indicated by operation 17.

3.7.2 Marking. The parts of the cap shall be marked to insure a uniform shade and size. Any method of marking may be used except:

(a) Metal fastening devices (no metal devices to be used on lining material).

(b) Adhesive type tickets which leave an impression or traces of adhesive on the material after removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut cap parts in strict accordance with patterns furnished. b. Cut the crown piece with the length running in the direction of the warp. Cut the front piece with the directional line in the warp direction. Cut side pieces in the warp or the filling but in the like direction in each cap. Cut all component parts from one piece of material except the 3/4-inch strips for visor welt, and the strip of 1-1/8-inch wide basic material for band, which may be cut from ends. c. Cut the lining material with the length of the crown piece running in the direction of the warp. d. Cut seam tape material on the bias, 1-5/8 ± 1/8 inches wide. Cut the interlining for the crown seam tape 3/4 ± 1/16 inch in the warp direction. e. Cut raschel nylon stiffener with the heavy filling lines across the width of the stiffener. f. Cut the crown protector piece and visor in accordance with patterns furnished.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-657 shall be removed from production and replaced with non-defective and properly matched components.						
3.	Marking. Mark, ticket or bundle all cut parts to insure a uniform shade and proper assembly throughout the cap.						
4.	Make crown seam bias tape. a. The crown seam tape may be cut and stitched or pressed and placed on rolls for machine application.						
	b. (1) Fold sheeting or lining over interlining strip with edges of material abutting or overlapping at center and stitch with two rows of stitching, 3/16 to 1/4 inch gage, through center of tape.	301 or 401 or 101		6-8 6-8 6-8	A gold A gold A gold	A gold A gold	
	- or - (2) Fold sheeting or lining over interlining strip with edges of material abutting or overlapping at center and press.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make inner body band.						
	Finished appearance. The inner body band shall be cut to required length and with the overlapped ends in the back portion of cap not closer than 1/2 inch of center back seam. The dull side shall be toward outside of cap.						
	a. Overlap inner body band 1 + 1/4 inches and stitch top and bottom edges 3/16 to 1/4 inch from each edge for a distance of not less than 1/2 inch beyond each overlapped end, or secure with two black staples, equally spaced widthwise in center of overlap, with the staples clinched on inside of band.	301 or 101		6-8 6-8	A A	A	
*6.	Make crown.						
	Finished appearance. The basting of the crown lining shall not be exposed on the outside of the finished crown. The lining shall not be twisted in the basting.						
	a. Center crown protector on crown lining.						
	b. Stitch crown protector to crown lining 1/16 to 3/16 inch from edge of protector.	301	LSr-2 (a)	6-8	A gold	A gold	
	c. Baste crown lining evenly, close to edge of outer crown.	101	SSa-1	4-6	A gold		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Join sides of cap.						
	Finished appearance. The sides of cap shall be carefully joined to avoid twisting or puckering.						
	a. Join front and sides of cap; open seam and stitch each side of seam 1/16 + 1/32, - 0 inch. Seams may be pressed open prior to stitching each side of seams.	301	SSz-3	10-14	A	A	
	b. Join front stiffener to front quarter; stitch front stiffener to top and bottom of front wool quarter 1/8 to 3/16 inch from raw edge with the notches aligned. When stitching the bottom cut out portion, the center bottom nylon stiffener shall not be caught in stitching. Backstitching is not required.	301 or 401 or 101	SSa-1 SSa-1 SSa-1	6-10 6-10 6-10	A A A	A A	
*8.	Make front stay (3.2.19).						
	a. Position bottom edge of cotton warp and rayon filling cloth and crinoline (cotton warp, rayon filling cloth face up) on lining at center of lining piece. Fold sides of lining piece over cotton warp, rayon filling cloth toward center. Position a piece of black silesia (or other suitable black material) cut 1-3/4 to 2 inches high and at least the width of the front stay on the folded side of the lining with bottom edges even and stitch through all plies with two rows of vertical stitching 1-1/4 to 1-5/16 inch gage, centered on the stay. Needle thread shall be on side of black facing.	301		6-10	A	A gold	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*8.	Make front stay (3.2.19). (cont'd)						
	NOTE: Black facing shall be against braid in the finished cap.						
	b. Stitch across top of stay 1/2 to 5/8 inch from top edge of stay.	301		6-10	A gold	A gold	
9.	Make band.						
	a. Cut the 1-1/8 inch strip of basic material for bottom edge of band, and the 1-3/4-inch braid, each to fit the size of cap.						
	b. Overedge stitch the bottom edge of the 1-1/8-inch strip of basic material.	502 or 503	EFd-1 EFd-1	6-8 6-8	A A	A A	
	c. Lap the braid on the 1-1/8 inch strip, 1/4 ± 1/16 inch and stitch 1/16 + 1/32, - 0 inch from edge of braid.	301 or 101	LSa-1 LSa-1	10-14 10-14	A A	A	
	d. Join back seam of band with a 3/8 inch (minimum) seam. Open seam and stitch each side of seam 1/16 + 1/32, - 0 inch. Seam may be pressed open prior to stitching each side of seam.	301	SSz-3	10-14	A	A	
*10.	Join band to sides and front and join sides and front to crown.						
	Finished appearance. The band shall be joined to the sides and front and the sides and front joined to the crown of the cap so that the seams are not twisted or puckered.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*10.	Join band to sides and front and join sides and front to crown. (cont'd)						
	a. Join the top edge of braid to the bottom edge of the side with the seam of band aligned with center back seam.	101 or 301 or 500 class	SSa-1 SSa-1 SSa-1	10-14 10-14 6-8	A A A	 A A	
	b. Join crown to the sides and front with not more than a 1/4 inch seam, catching the stiffener and top of front stay in the stitching at center front of cap.	301 or 101	SSad-3(a) SSad-3(a)	10-14 10-14	A A	A 	
	c. Press crown seam open.						
	d. Stitch each side of seam 1/16 + 1/32, - 0 inch around crown, catching the crown seam tape in both rows of stitching on the underside. The ends of the tape shall overlap not less than 1/2 inch.	301 or 101	SSad-3(b) SSad-3(b)	10-14 10-14	A A	A 	
*11.	Set eyelets.						
	a. Position one eyelet in center front piece as indicated by mark on pattern (1/8 inch off mark indicated shall be acceptable) and 1 + 1/8, - 0 inches above top edge of braid measured from center of eyelet. The eyelet shall be inserted through the front piece, nylon stiffener and front stay and shall be backed with a brass washer.						
	b. Insert two eyelets in each side of cap, through basic fabric and stiffener on front piece and through basic fabric on side pieces, 7/8 + 1/8, - 0 inch from						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*11	Set eyelets. (cont'd) top edge of the band to center of eyelet. The eyelets shall be horizontally positioned, 1 ± 1/8 inches each side of the front and side joining seams measured to center of eyelets. The eyelets may be backed with a brass washer.						
*12	Set inner body band in cap. Finished appearance. The inner body band shall be so attached in the cap that there shall be no twisting or puckering of the braid band. The front stay shall finish between inner body band and braid. a. Reverse inner body band and outside of band and position so that the bottom edge of braid shall be 3/16 ± 1/16 inch above the bottom edge of the finished cap. b. Stitch top edge of inner body band to seam allowance of braid band and cap 1/4 to 5/16 inch from top edge of inner body band. The stitching shall start and finish within 1-1/4 inches each side of front stay. c. Turn cap and insert the twin wire, cut 3-3/8 to 3-1/2 inches long, between rows of stitching, positioned between crinoline and cotton warp and rayon filling cloth of front stay.	301 or 101	SSa-1 SSa-1	6-8 6-8	A A	A	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*12.	Set inner body band in cap. (cont'd)						
	d. Pull the bottom of band tightly over the bottom edge of the inner body band and stitch 1/16 ± 1/32 inch from bottom edge of braid through all plies catching bottom edge of front stay in the stitching. The side edge of the identification-size label shall be caught in the stitching, 1 ± 1/2 inches to the right or left of center back seam. The label shall be so positioned that the size marking shall be visible beyond edge of sweatband in the finished cap.	301	OSf-1	8-12	A	A	
*13.	Set welt and visor.						
	Finished appearance. The welt and visor shall be uniformly set and the band shall not be distorted or twisted in the setting.						
	a. Fold a strip of the basic material in half, cut in accordance with patterns furnished, over the 3/8 + 0, - 1/16 inch wide reinforcement strip of pressed fiber and stitch 1/4 to 5/16 inch from folded edge.	301 or 101	BSa-1 BSa-1	6-8 6-8	A A	A	
	b. Fold in half a strip of polyethylene film, cut 3/4 ± 1/16 inch wide, and superimpose on folded basic material (with reinforcement strip inserted) with folded edges even and stitch through all plies 1/8 to 3/16 inch from folded edges to form a welt. NOTE: Operations a and b may be combined in one operation.	301 or 101	SSa-1 SSa-1	6-8 6-8	A A	A	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
*13	Set welt and visor. (cont'd) c. Center the visor and the welt, cut longer than the length of the visor 1/2 ± 1/4 inch on each side, on the inside of the inner body band and stitch together in one operation forming an inside welt for attaching sweatband. The polyethylene strip shall be next to the visor.	301	LSa-1	6-8	16-4 or 20-4	20-4 or 20-4	
14	Finish ends of welt. Raise each end of the welt 1/8 to 3/16 inch from bottom edge of band and staple through welt and all plies of material including the braid band with the legs of the staple parallel to the stitching in the welt. Ends of staple shall be clinched on outside braid band.						
15	Attach button socket posts. Finished appearance. The button socket posts shall be uniformly positioned so that the eagles on the buttons will be in an upright position when buttons are secured. a. Position socket holes on the band so that the center of each socket is 5-3/4 ± 1/16 inches each side of center front of cap and 7/16 ± 1/16, - 0 inch from bottom edge of band. b. Punch the button socket holes through band and inner body band.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Attach button socket posts. (cont'd)						
	c. Insert button socket posts and stitch through inner body band.	Hand		4-6	A		
	- or -						
	d. The button socket posts shall be inserted and a securing staple clinched snugly over the center of the screw tube flange on the inside of the band (see 3.2.20.2) or if the flange is equipped with perforations, the staple may be through perforations.						
16.	Make and attach sweatband.						
	Finished appearance. The abutted edges of seam of sweatband shall be even with the center back seam of cap. The sweatband shall finish smooth and flat without distortion to provide a comfortable fit. Neither the felling stitches nor the edge of the sweatband shall be exposed beyond the lower edge of the cap.						
	a. Apply stamped size marking on inside of the sweatband 2 ± 1/2 inches from end.						
	b. Butt ends of the sweatband and join with a row of zigzag stitching, reinforced on the underside with a 5/8 ± 1/16 inch strip of cotton fabric.	304	FSa-1	8-12	A brown	A brown	
	c. Fell sweatband neatly in the cap in such a manner as to give a cushioning effect at front of cap.	Hand		7-9	C		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

NO.	TABLE II (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Block caps. Finished appearance. The caps shall be uniformly blocked, and shall not be distorted in the blocking. a. Hand block caps to proper shape over wooden blocks for each specified size. b. The blocking shall be done on a five piece block by thoroughly steaming on the block. The caps shall be thoroughly dried while still on the block in a heated oven.						
18.	Chin strap and buttons. Finished appearance. The chin strap shall fit smoothly without twists or distortion. a. Attach the chin strap snugly and attach the buttons into the posts with the eagle in an upright position.						
19.	Clean cap and attach instruction label. a. Trim all thread ends; remove loose threads, spots, stains and shade tickets without injury to the material. b. Insert the grommet into the crown. The grommet shall be centered on crown seam tape and shall be evenly distributed and fit snugly in the cap. Plug shall be at center back. c. Attach cardboard instruction string to one of the chin strap buttons.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

3.8 Measurement of cap. The finished measurements of the caps shall be as specified in table III.

TABLE III. Measurement of caps

	Inches
Height of cap at front (measured at the point where band joins the visor to center of crown seam).	4-1/4 ± 1/8
Width of quarters at side seams (measured from band joining seam to center of seam).	1-7/8 ± 1/8
Width of front piece at center front (measured from band joining seam to crown joining seam).	2-1/2 ± 1/8
Width of sides at backseam (measured from band joining seam to crown joining seam).	1-7/8 ± 1/8
Width of visor (measured on upper side at center front).	2 ± 1/16
Width of finished band (measured from front and side seam to bottom edge of band).	1-3/4 ± 1/8

Crown

Head measurement 1/	Size of cap	Length of crown 2/ (from seam to seam)	Width of crown 2/ (from seam to seam)
Inches		Inches	Inches
20-1/8	6-3/8	10-3/8	9-7/8
20-1/2	6-1/2	10-1/2	10
20-7/8	6-5/8	10-5/8	10-1/8
21-1/4	6-3/4	10-3/4	10-1/4
21-5/8	6-7/8	10-7/8	10-3/8
22	7	11	10-1/2
22-3/8	7-1/8	11-1/8	10-5/8
22-3/4	7-1/4	11-1/4	10-3/4
23-1/8	7-3/8	11-3/8	10-7/8
23-1/2	7-1/2	11-1/2	11
23-7/8	7-5/8	11-5/8	11-1/8
24-1/4	7-3/4	11-3/4	11-1/4
24-5/8	7-7/8	11-7/8	11-3/8

1/ All head measurements + 1/8, - 1/4 inch.

2/ All crown measurements ± 3/16 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

3.8.1 Sizes. All caps shall be properly sized and marked accordingly.

3.9 Workmanship. The finished caps shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificates of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Quality conformance inspection.

* 4.2.1 Sampling and inspection provisions. Sampling and inspection shall be performed in accordance with MIL-STD-657.

4.2.1.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, testing shall be performed on components listed in table V for characteristics noted. Wherever applicable, tests shall be conducted in accordance with methods prescribed in FED-STD-191 as listed in table V except that the results of the physical testing of the polyethylene obtained under testing conditions defined in FED-STD-406 or FED-STD-601 will be acceptable except in the case of dispute. In dispute cases tests shall be conducted with both the specimen and test apparatus under Standard conditions as defined in FED-STD-191. Except where otherwise specified, all testing requirements apply to the sample unit. All test reports shall contain the individual values utilized in expressing the final results.

* 4.2.1.2 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with table IV. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified. The unit for expressing the lot sizes and sample unit for testing each component shall be in accordance with applicable subsidiary specifications and as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

Component	Lot size expressed as	Sample unit for testing
Pressed fiber (for sweatband welt)	Yards	1/2 yd. full width
Knitted nylon mesh (Raschel)	Yards	1 yd. full width
Inner body band (polyethylene)	Each	7 each
Sweatband	Each	7 each
Visors	Each	3 each
Eyelets	Gross	15 each
Washer (eyelet)	Gross	10 each
Sweatband reinforcement strip (cotton print or sheeting cloth, coated or uncoated)	Yards	1 yd. linear
Twin wire tape	Feet	2 feet
Crinoline	Yards	1/4 yd. full width
Cotton warp and mono-filament nylon filling cloth (when applicable)	Yards	1/4 yd. full width
Staples (each type)	Gross	15 each
Crown support	Each	1 each

TABLE IV. Sample size

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

*TABLE V. Test methods

Component	Characteristic	Requirement paragraph	Test method or procedure
Pressed fiber	Weight	3.2.5	5041 1/
	Color	3.2.5	Visual 2/
	Thickness	3.2.5	5030
Nylon mesh	Material identification	3.2.7	1530
	Weight per square yard	3.2.7	5041
	Stiffness:	3.2.7	
	- parallel to wales		5202
	- perpendicular to wales		5202
Material for inner body band	Width	3.2.8	5020
	Thickness	3.2.8	5030
	Finish	3.2.8	Visual 2/
	Stiffness	3.2.8.2	4.3.1
	Bending	3.2.8.3	4.3.2
Sweatband	Width	3.2.10	5020
	Diameter of holes	3.2.10.1	Visual 2/
	Number of holes	3.2.10.1	Count 3/
	Margin	3.2.10.1	Manual 2/
Visor binding	Material identification	3.2.12.3	4/
	Width	3.2.12.3	Visual 2/
Visor	Stiffness	3.2.12.4	4.3.3
	Bond strength	3.2.12.4	4.3.4
	Outside edge finish (trim and sanding)	3.2.12.4	Visual 2/
	Lamination identification	3.2.12.4	4/
Eyelets	Material identification	3.2.16	4/
	Finish	3.2.16	Visual 2/
	Color	3.2.16	Visual 2/
	Dimension	3.2.16	Manual 2/
Washers	Material identification	3.2.17	4/
Sweatband reinforcement strip	Material identification	3.2.18	4/
	Width	3.2.18	Manual 2/

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

*TABLE V. Test methods (cont'd)

Component	Characteristic	Requirement paragraph	Test method or procedure
Wire tape	Material identification	3.2.19	4/
	Width of tape	3.2.19.1	Manual 2/
Steel twin wire	Material identification	3.2.19.1	4/
	Thickness	3.2.19.1	Manual 2/
	Width	3.2.19.1	Manual 2/
Crinoline	Material identification	3.2.19.2	1200
	Weight	3.2.19.2	5041
	Threads per inch:	3.2.19.2	
	- warp		5050
	- filling		5050
Staples, for	Material identification	3.2.20	4/
	Thickness	3.2.20	Manual 2/
	Salt spray	3.2.20	811 of FED-STD-151 2/
-Closing loops	Width	3.2.20.1	Manual 2/
	Prong length	3.2.20.1	Manual 2/
-Button post	Width	3.2.20.2	Manual 2/
	Thickness	3.2.20.2	Manual 2/
	Leg length	3.2.20.2	Manual 2/
	Crown width	3.2.20.2	Manual 2/
-Front welt & ends	Width	3.2.20.3	Manual 2/
	Thickness	3.2.20.3	Manual 2/
	Leg length	3.2.20.3	Manual 2/
	Finish	3.2.20.3	Visual 2/
Crown support	Identification of steel wire and coating, width, and thickness	3.2.21.1	4/
	Material identification of couplings	3.2.21.1	4/
	Coupling length	3.2.21.1	Manual 2/
	Salt spray	3.2.21.1	811 of FED-STD-151 2/

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

*TABLE V. Test methods (cont'd)

Component	Characteristic	Requirement paragraph	Test method or procedure
Grommet	Identification of nylon	3.2.21.2	1530 4/
	Identification of cotton	3.2.21.2	1200
	Diameter	3.2.21.2	Visual 2/
	Number of carriers	3.2.21.2	Count 3/
	Ends per carrier	3.2.21.2	Count 3/
	Warps	3.2.21.2	Count 3/
	Picks per inch	3.2.21.2	Count 3/

1/ Five (5) determinations shall be made from each sample unit and the results reported as the average of the five determinations to the nearest 0.01 ounce per square foot.

2/ One determination shall be made from each sample unit and the results reported as "pass" or "fail". All failures to be described.

3/ One determination shall be made from each sample unit and the results reported to the nearest whole number.

4/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated characteristics.

4.3 Tests.

4.3.1 Polyethylene inner body band stiffness. The band shall be tested for stiffness at room temperature according to FED-STD-311, method 4211, using a span length of 1.0 inch, a moment weight of 1.0 inch-pounds and measuring the load at 20° on the angular deflection scale.

4.3.1.1 Perforated band. The test piece shall be a section of the band, 1 inch ± 0.005 inch wide, 4 inches long and thickness of the band. It shall be cut from the center part of the band containing perforations and the cut edges may contain perforations. The thickness shall be measured to an accuracy of ± 0.001 inch using method B of ASTM D 374-68 at not less than five points distributed both across the width of the sample and along its length, and the average thickness recorded for each test piece.

4.3.2 Polyethylene inner body band bending test. The test is run on five four-inch long pieces of the perforated band. Each piece shall be bent across its width at least 180° around a metal test mandrel, a round metal bar measuring 1/8 inch diameter. The piece shall be pressed firmly against the mandrel and the bend made at the location of the perforations. Each piece shall be examined for cracks, both

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

while bent and after removing from the test. The test shall be run at 0°F. The specimen shall be straightened to its original position after removal from the mandrel. All samples and the test mandrel shall be kept in a cold box at a temperature of 0 ± 3°F. for not less than four hours before the test. The test shall be run in the cold box and the samples and mandrel handled only with heavy gloves so as to prevent warming of the samples during the test.

4.3.3 Visor stiffness. The stiffness of the visor shall be tested as follows:

4.3.3.1 Specimen. The specimen shall be 1 inch by 5 inches and shall be cut from the middle section of the visor, not including the skived edge.

4.3.3.2 Apparatus. The apparatus used shall be as specified in Method 4211 of FED-STD-311.

4.3.3.3 Procedure. Place the weight on the pendulum, to give bending moment of 5 inch-pounds and adjust the pin to give a 2-inch span. One end of the specimen shall be clamped in the jaws of the machine with the top side of the visor in position to rest against the pin. The free end of the specimen shall extend 1-1/2 inches beyond the pin. The apparatus shall be operated until the free end of the specimen just makes contact with the pin. Both pointers shall be adjusted to zero. The apparatus shall be operated until the angle pointer shows that the leather has been bent through an angle of 20°. At that instant, the percent of maximum bending moment as indicated by the other pointer is recorded. The force required to bend the leather is calculated by dividing the bending moment by the span.

4.3.3.4 Report. The force in pounds required to bend the leather through an angle of 20° shall be reported.

4.3.4 Visor bond strength. The visor bond strength shall be tested as follows:

4.3.4.1 Specimen. The specimen shall be 1 inch by 5 inches. The specimen used in the stiffness test shall be used. The top and bottom layers of the leather shall be separated for a distance of 2 inches from one end of the specimen.

4.3.4.2 Apparatus. The machine shall be of such capacity that the reading made will fall into that part of the scale which is accurate to within one-quarter pound. The speed of the moving jaws shall be 10 ± 2 inches per minute. The machine shall be adjusted to record instantaneous load by removing any automatic limiting device.

4.3.4.3 Procedure. The separated ends of the specimen shall be clamped in the jaws of the machine with the jaws approximately 1 inch apart. The machine shall be started and the pieces of leather shall pulled apart for a distance of 1 inch. At that instant, the load on the machine shall be read and recorded.

4.3.4.4 Report. The report shall state the load, in pounds per inch, required to separate the two pieces of leather.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

* 5.1.1.1 Unit packages. Each cap shall be inserted into a polyethylene bag. The polyethylene bag shall be flat style, made from clear polyethylene film of 0.00125-inch thickness (+ 25 percent tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The bag may be fabricated from polyethylene film tubing or sheeting. The cap visor shall face the bag opening. The bag shall measure 19 by 14-1/2 inches with the opening on the smaller dimension. A mechanical tie (paper or plastic covered soft steel wire, aluminum band, etc.) shall be applied to close the bag opening.

5.1.1.2 Intermediate packages. Two caps of one size only, bagged as specified in 5.1.1.1, shall be placed in an intermediate fiberboard box conforming to style RSC, type CF, variety SW, class domestic, grade 125 of PPP-B-636. The inside dimensions of each fiberboard box shall be 11-3/4 inches in length, 11-3/4 inches in width, and 8-1/2 inches in depth. Each box shall be provided with a one-piece die-cut corrugated fiberboard bridge with the shape, dimensions, and material requirements as shown in Figure 6. The first cap shall be placed crown up in the box with the visor in a corner. Two sheets of tissue wrapping paper, 30 inches in length by 20 inches in width, conforming to type I, class 1 or 2 of UU-P-553, shall be loosely rolled along the 30-inch dimension. The roll of tissue wrapping paper shall be used to fill the void behind the cap and shall half-way circumvent the cap band so as to fit between the bridge uprights and the cap. The set-up fiberboard bridge shall then be positioned in the box at right angles to the cap with the bridge platform incline parallel to the slope of the cap crown. The second cap shall be placed crown down in the box with the visor in the opposite corner from the visor of the first cap. A two-sheet roll of tissue wrapping paper as specified for the first cap shall be applied to the second cap in the same manner as required for the first cap. Each box shall be sealed with gummed paper tape having a minimum width of two inches conforming to type III, grade A of PPP-T-45.

5.1.2 Level C. Caps shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

* 5.2.1 Level A. Twenty-four caps of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A packages shall be packed flat two in length, two in width, and three in depth within a shipping container. Inside dimensions of each shipping

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

container shall approximate 24-3/4 inches in length, 24-3/4 inches in width, and 27-3/4 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636. Toward the end of the contract or when there are less than the required amount of the same size per container, mixed sizes may be packed within the same container.

5.2.2 Level B. Twenty-four caps, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat two in length, two in width, and three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 24-3/4 inches in length, 24-3/4 inches in width, and 27-3/4 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636. Toward the end of the contract or when there are less than the required amount of the same size per container, mixed sizes may be packed within the same container.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification.

5.2.3 Level C. Caps, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container, packed with caps of mixed sizes, shall have securely attached to the end and side, directly under the printing or stencilling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed or stamped thereon, and under these words shall be legibly printed or stamped the correct quantity and sizes contained therein.

5.3.2 Handling marking. One side and one end of each shipping container shall be plainly marked in 1-1/2 inch letters the word "UP" with arrow marks as follows:

UP UP

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The caps are intended for use by male military personnel of the Department of the Army.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Sizes required (see 1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples and shade samples. For access to sample of the end item, samples of inner body band, sample of visor and samples for shades, address the procuring office issuing the invitation for bids.

6.4 Information regarding black shade used for the finish of visor and chin straps may be obtained from the contracting officer (see 3.2.12 and 3.2.13.1).

6.5 Plastic material for inner body band. Satisfactory results have been obtained in meeting the detailed requirements of the inner body band by utilizing a plastic material which has a stiffness (scale reading) before perforation of 15 to 31 as measured by the method of test specified herein.

6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where change (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activity:

Army - MD

Preparing activity:

Army - GL

Project No. 8405-A692

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

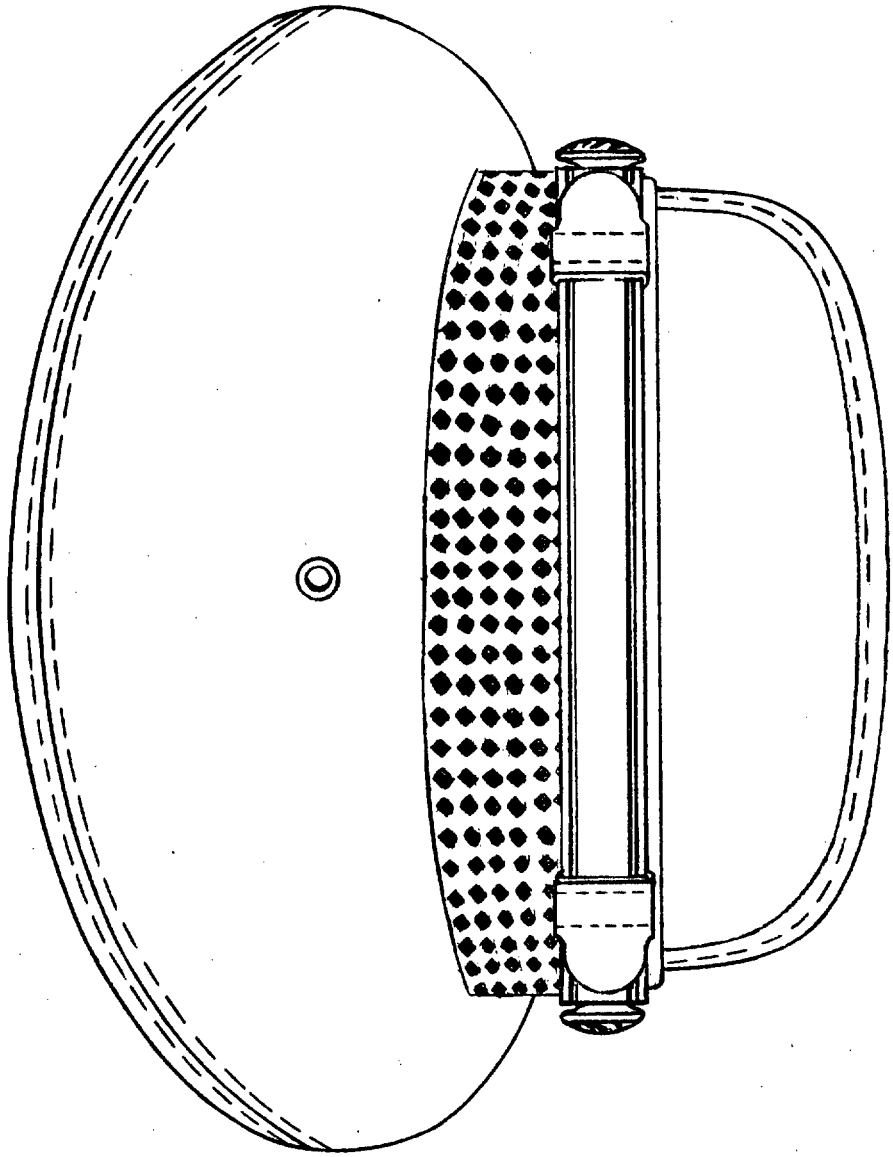


FIGURE 1 CAP, SERVICE, WOOL, ARMY GREEN-44.
FRONT VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

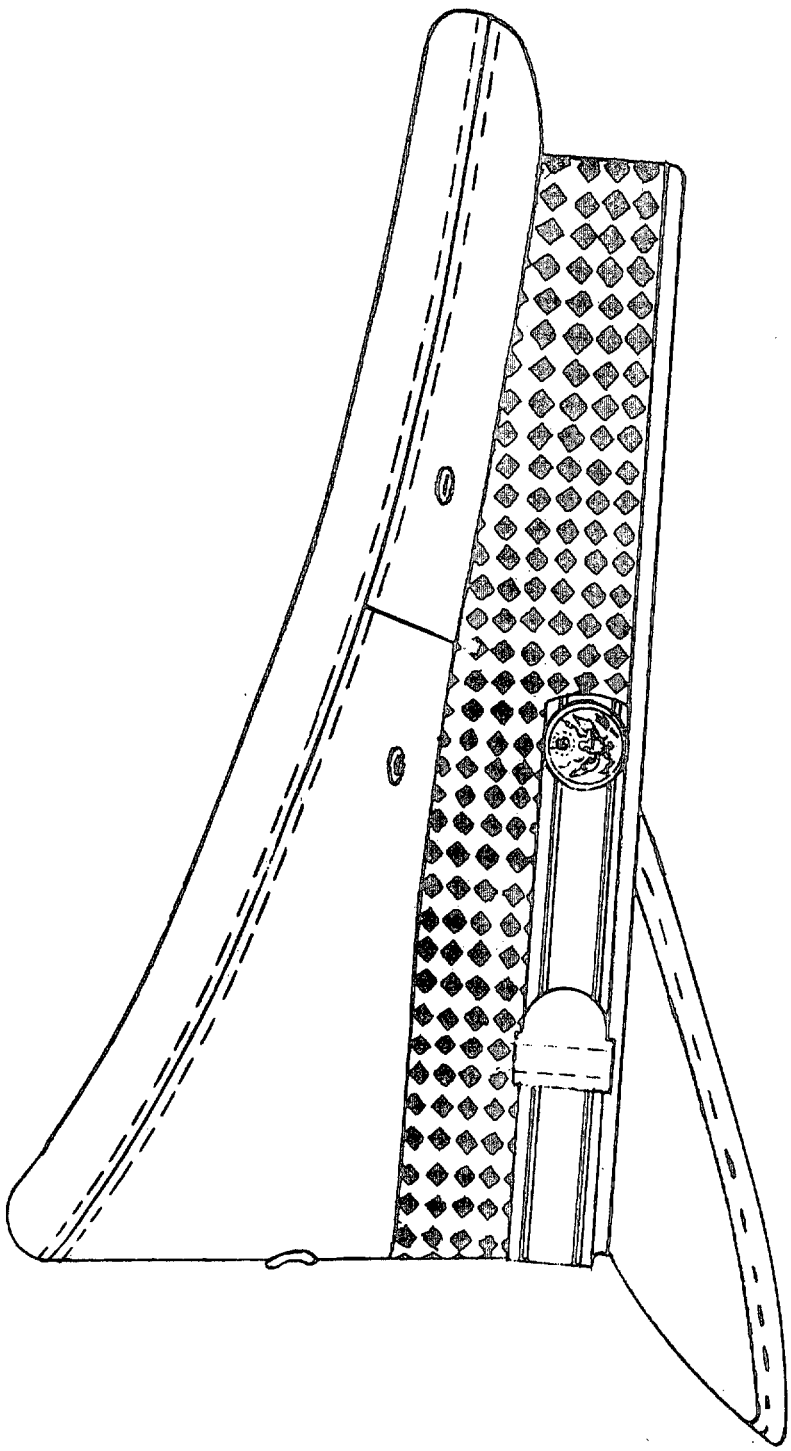


FIGURE 2 CAP, SERVICE, WOOL, ARMY GREEN-44
SIDE VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

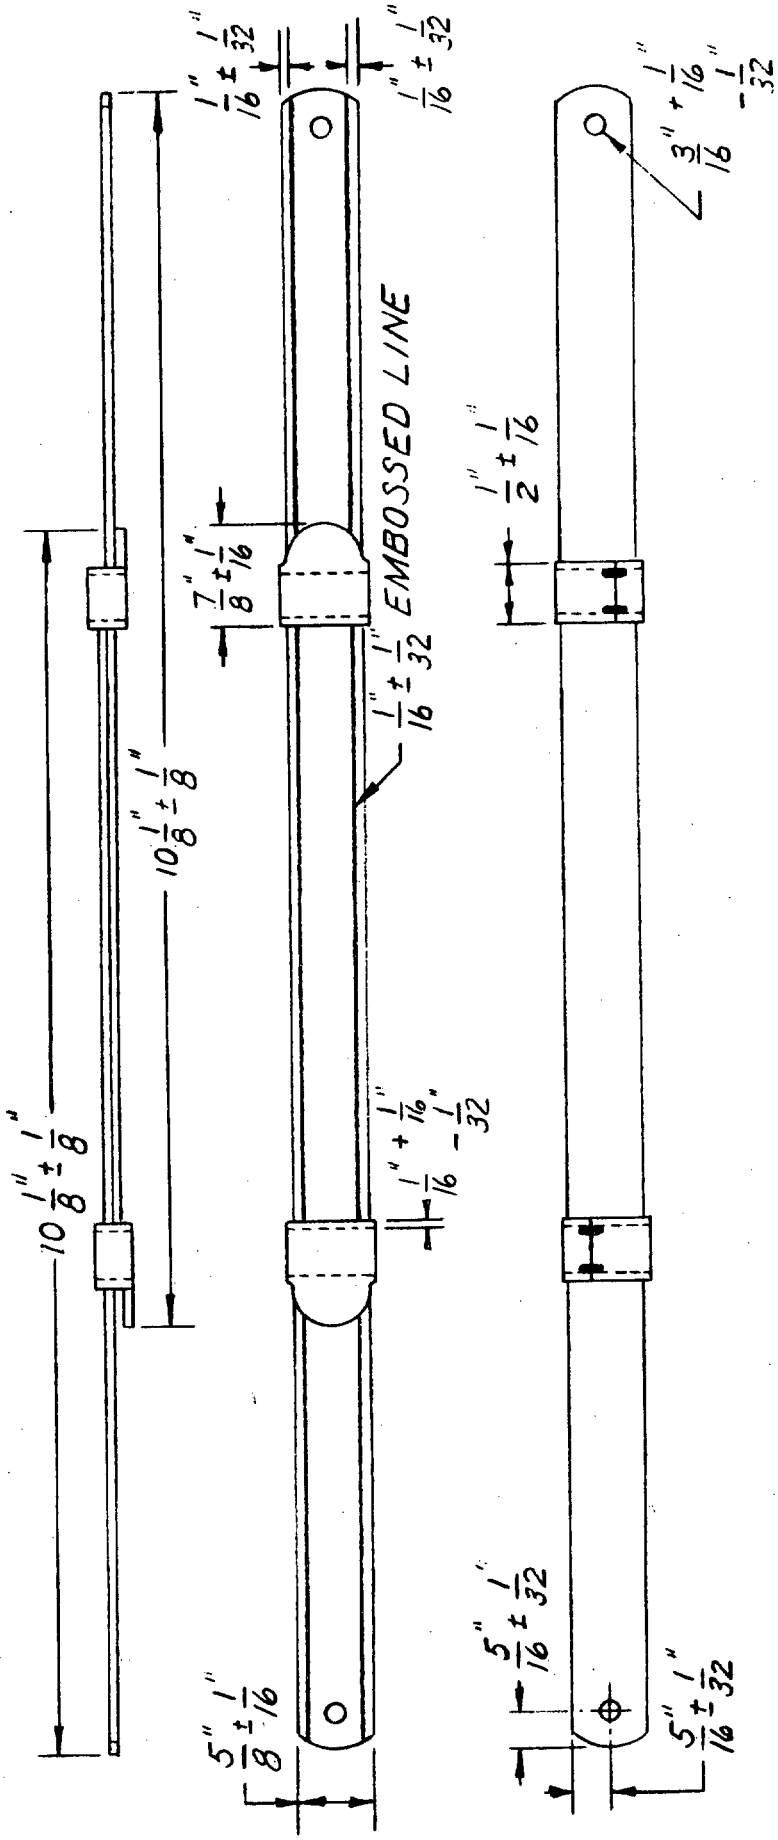


FIGURE 3. CAPS, SERVICE; CHIN STRAP DOUBLE LEATHER, 5/8 INCH

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.


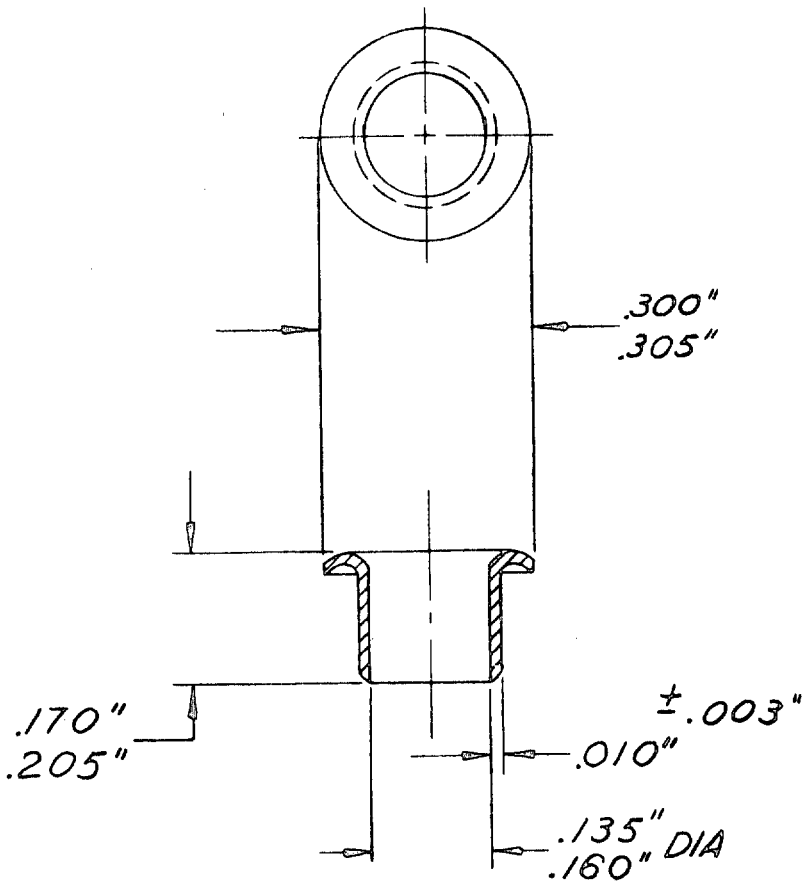


FIG-4 EYELET

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

PACKING INSTRUCTIONS

1. Remove Insignia



2. Slip Out Stayer With Grommet



3. Collapse Cap Ready For Packing

FRONT

Instructions for Handling


1. Never pick cap up by grabbing the front edge of the crown. Eventually that practice will cause damage.
2. Always put the cap down right side up, never lay it down on the crown.
3. Never carry the cap crushed under your arm.
4. Pick up your cap by sliding your fingers under the side at the rear of the visor.
5. To brush the cap, use a soft brush and brush from front to rear.

REVERSE SIDE

FIGURE 5 CAP, SERVICE, ARMY
INSTRUCTION LABEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1982 0 — 505-022/2005

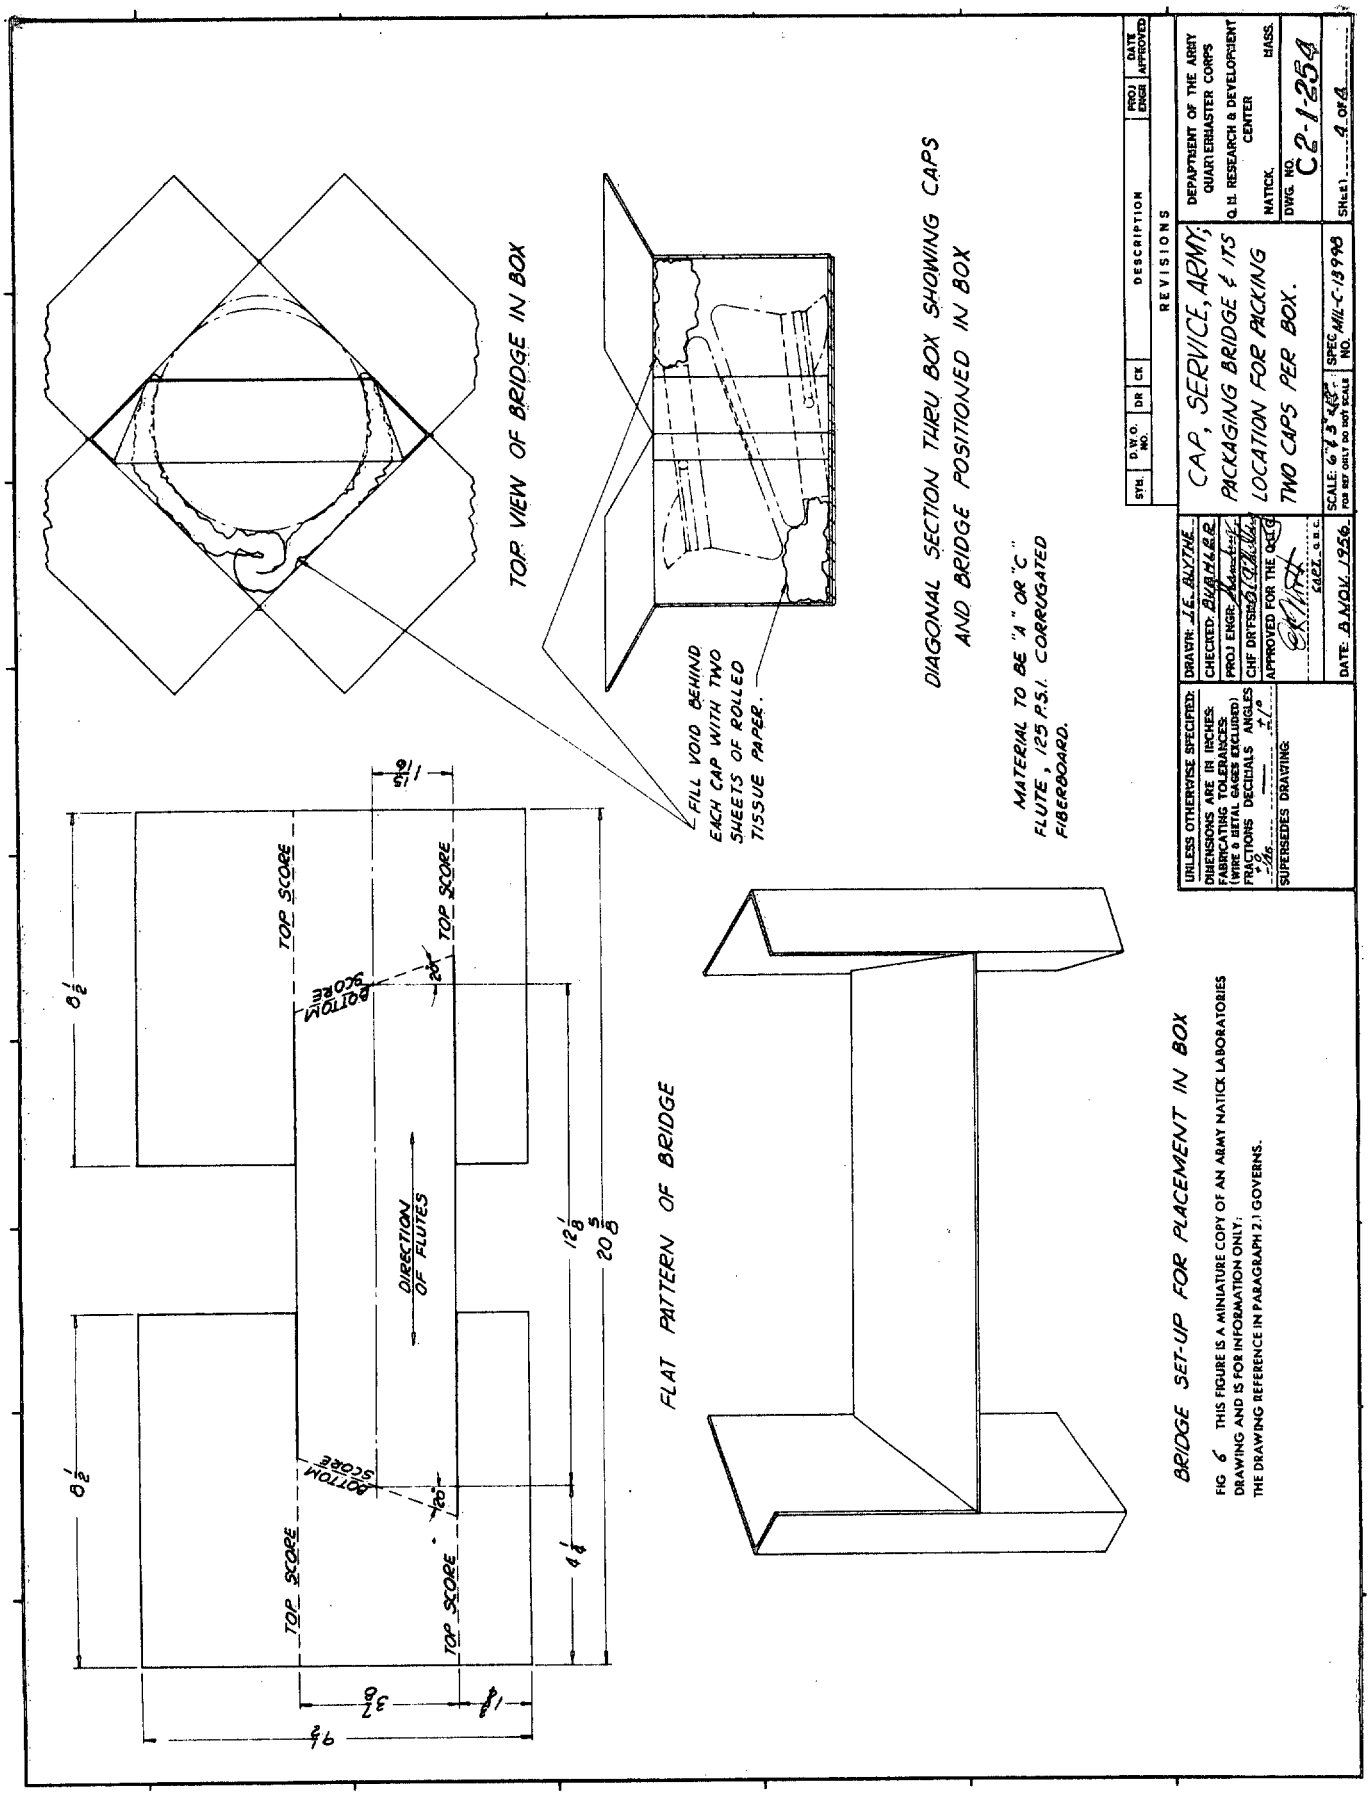

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:44Z
Check the source to verify that this is the current version before use.