MIL-P-14026 (Ord)
4 April 1955
SUPERSEDING
FCP NO. 932 - 53D
8 SEPTEMBER 1954

MILITARY SPECIFICATION

PACKAGING OF ANTENNA AT-716/MS

1. SCOPE

1.1 This specification covers the preservation, packaging, packing, and marking of Antenna AT-716/MS at the following three levels:

Level A - Military Package
Level B - Limited Military Package
Level C - Minimum Military Package

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

PPP-T-0076	- Tape, Paper, Water Resistant, Pressure Sensitive.

Military

JAN-P-100	- Packaging and Packing for Overseas Shipment - General Specification
MIL-P-116	- Preservation, Methods of
JAN-B-121	- Barrier-Material, Greaseproof
JAN-P-127	- Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure Sensitive, Water Resistant
MIL-C-3769	- Crates, Intermediate, Sheathed, Wood, Nailed
MIL-E-10687	- Enamel, Lustreless, Quick-drying (for ammunition)

STANDARDS

Military

MIL-STD-129	- Marking for shipment and storage

(Copies of specifications, standards, drawings, and publications, required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Level A - Military package.

3.1.1 Packaging

3.1.1.1 Cleaning. - The unpainted part of the rails on the antenna assembly shall be thoroughly cleaned in accordance with process C-4 of Specification MIL-P-116 and the cleaned surfaces shall be dried.

3.1.1.2 Preserving. - The cleaned, unpainted surfaces shall be coated with type P-7 preservative in accordance with Specification MIL-P-116. The preserved surfaces shall be covered with greaseproof barrier material conforming to type I, grade C, class 2 of Specification JAN-B-121.

3.1.1.3 Interior blocking. - Both lower end panels shall be removed and the lens shall be immobilized by placing corrugated fiberboard (figure 6) between lens and stationary bars on reflector. Fiberboard shall be secured to lens with tape conforming to Specifications PPP-T-0076 or JAN-P-127.

3.1.2 Packing

3.1.2.1 The shipping container shall be of the reusable type, conforming to Specification MIL-C-3769 except as specified herein.

3.1.2.1.1 A wood base shall be constructed in accordance with figures 1 and 2. Oak floor boards shall be used where the antenna rails rest.

3.1.2.2 The antenna shall be secured to the base by the antenna securing assembly, brackets and adjusting plates. Each half of the securing assembly shall be bolted together with 3 step bolts (3/8 inch diam. by 8-1/2 inches long). Each half of the securing assembly shall be bolted to the base floorboards with 4 step bolts (3/8 inch diam. by 5-1/2 inches long). A flat washer and a lock washer shall be placed under each nut. The exposed threads above the nuts shall be coated with unthinned paint or type P-1 preservative in accordance with Specification MIL-P-116, to prevent the nuts from backing off. It is essential that the securing assemblies be accurately cut so that they fit snugly against the antenna assembly rails. The brackets shall be bolted to 2 inch by 8 inch floorboards. (See figures 3, 4, and 5).

3.1.2.3 The sides, ends, and top of the shipping container shall be fabricated in accordance with figures 7, 8, 9, 10. The ends and sides shall be secured to the base with lag screws. The sides and ends shall be joined with strapping. The top shall be secured with strapping.

3.1.2.4 The exterior of the container (except bottom) shall be painted with one coat of enamel. The enamel shall conform to Specification MIL-E-10687.

3.2 Level B - Limited military package

3.2.1 Packaging. - Packaging shall be as specified in 3.1.1.

3.2.2 Packing. - Packing shall be similar to 3.1.2 except that waterproofing of top, sides and ends shall be omitted.

3.3 Level C - Minimum military package

3.3.1 Packaging. - Packaging shall be as specified in 3.1.1

3.3.2 Packing. - Packing shall be similar to 3.1.2 except that waterproofing of top, sides and ends shall be omitted.

3.4 Marking

3.4.1 Marking shall be in accordance with Standard MIL-STD-129.

3.4.2 Each reusable container shall be conspicuously marked on the exterior as follows:

REUSABLE CONTAINER - DO NOT DESTROY

This marking shall also be applied to the inside of the top panel of the container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46Z
Check the source to verify that this is the current version before use.

3.4.3 Special markings, as illustrated, shall be applied to the shipping container. (See figure 10).

3.4.4 A "FRAGILE" label shall be affixed to each side and end of the container.

3.4.5 Domestic shipments for limited storage shall be identified by marking the shipping container "LTD MIL PK"

3.4.6 Domestic shipments for immediate use shall be identified by marking the shipping container "MIN MIL PK"

3.4.7 Special overseas markings. - The following special markings shall be applied to overseas shipments:

3.4.7.1 Ordnance symbol shall be stenciled on the same surface immediately adjacent to the overseas address. The symbol shall be of a size commensurate with the size of the overseas address and be of the same color.

3.4.7.2 The SNL group of the item (SNL-F342) shall be stenciled on the sides of the container adjacent to the service color corner marking. The size of the stencil shall be commensurate with the size of the letters of the basic marking on the container.

3.5 Sample pack. - A preproduction sample pack shall be made in accordance with this specification.

3.6 Workmanship. - All operations and processes involved in accomplishing the cleaning, preservation, unit packaging, and packing requirements specified herein shall be in accordance with the highest grade practices associated with this type of work. All equipment used to perform the various procedures shall be such as to meet the requirements of this specification to the satisfaction of the procuring agency.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling. - The sample pack shall be inspected and approved by a Government inspector prior to packaging and packing the items for shipment.

4.1.1 Production packs shall be selected at random when the Government inspector considers it necessary to conduct tests to assure conformance with this specification.

4.2 Inspection. - All methods and materials shall be subject to inspection by a Government inspector.

4.3 Test procedures. - The preproduction sample pack and any production pack selected for test shall, at the discretion of the Government inspector, be tested in accordance with Specifications JAN-P-100 and MIL-P-116.

5. PREPARATION FOR DELIVERY

(Not applicable to this specification)

6. NOTES

6.1 Ordering data. - Invitation for bids and contracts should specify the title, number, and date of this specification and the level of shipment involved.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46Z
Check the source to verify that this is the current version before use.


6.2 Identification data. - The following stock number should be used in the identification data:

F342-7611367

Patent notice: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any right or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


CUSTODIAN:
Army-Ordnance Corps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46Z
Check the source to verify that this is the current version before use.

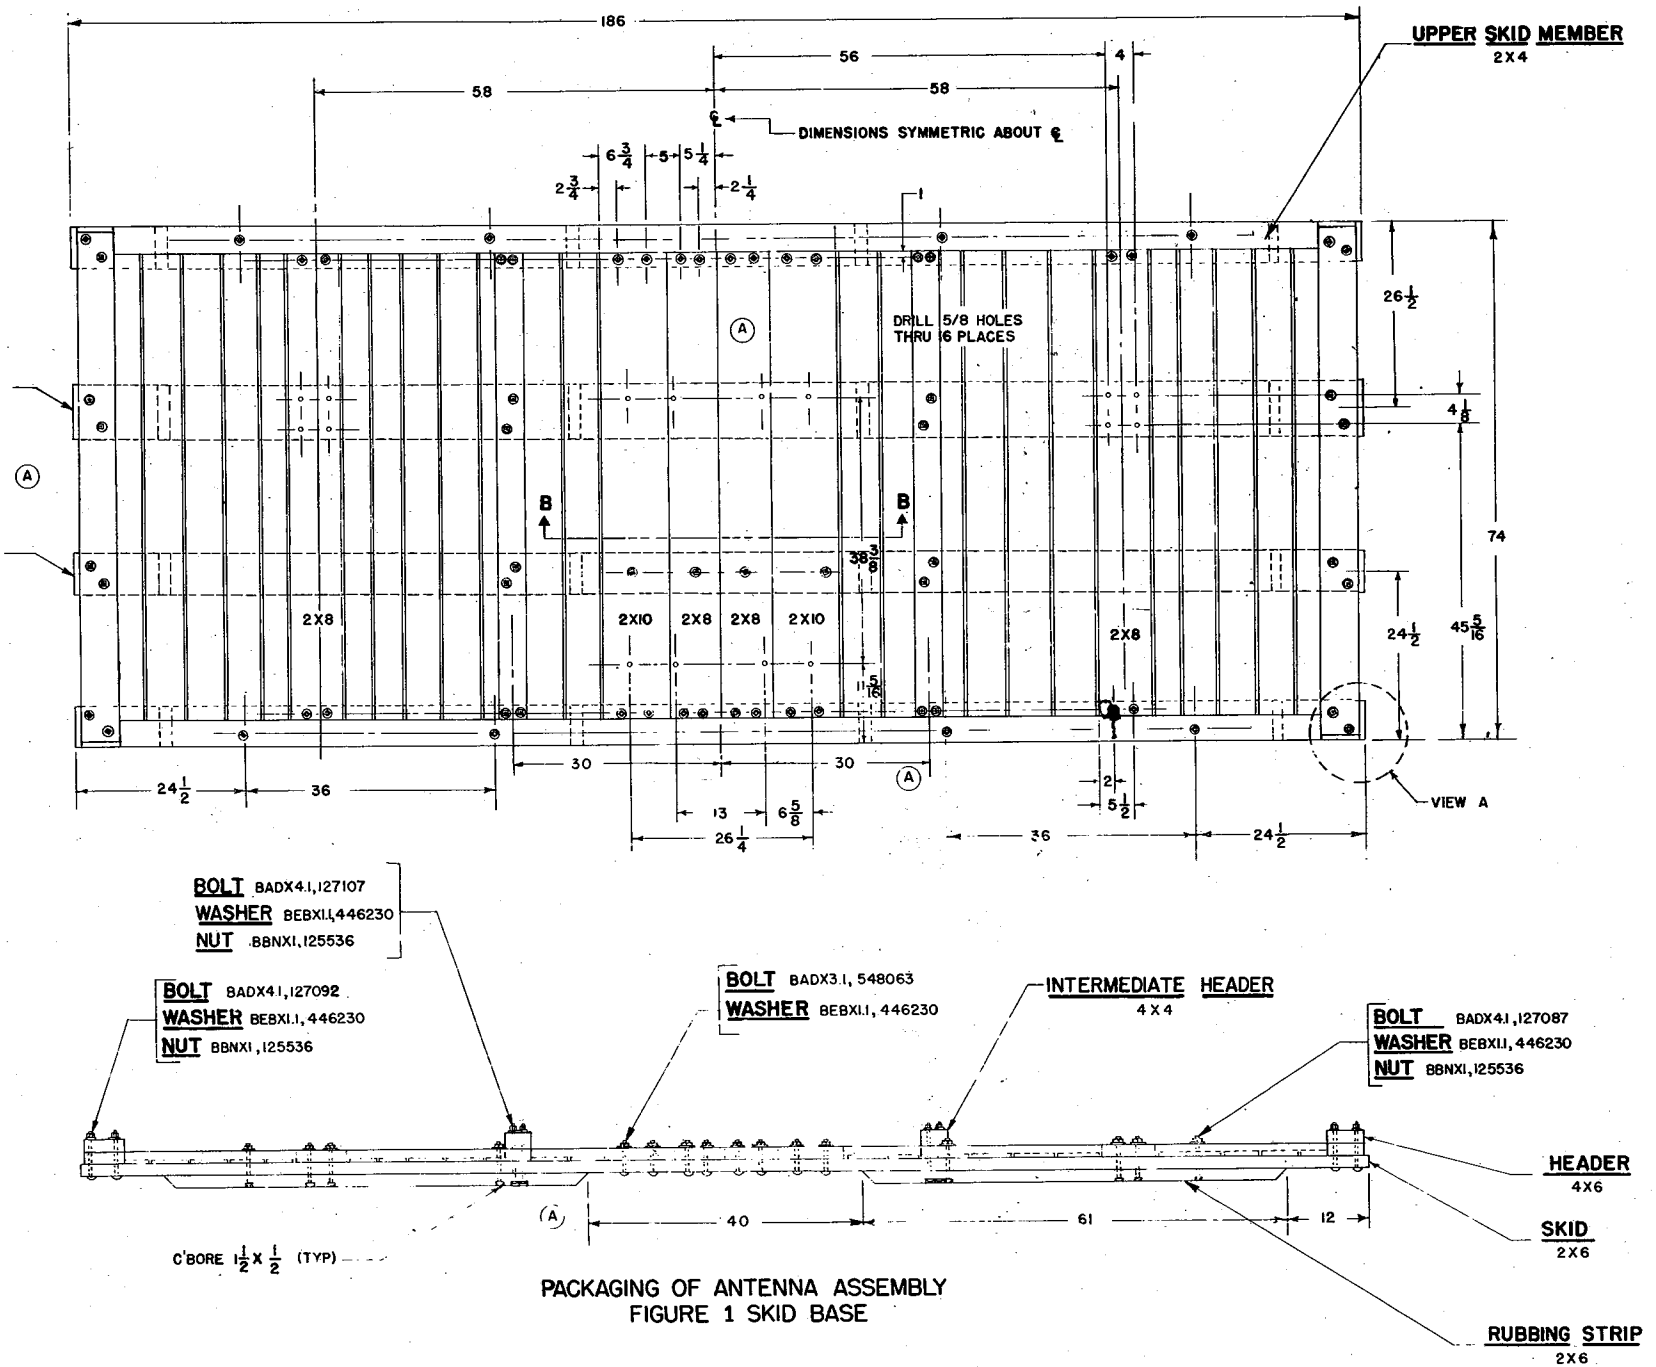


PACKAGING OF ANTENNA ASSEMBLY
FIGURE 1 SKID BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46Z
Check the source to verify that this is the current version before use.

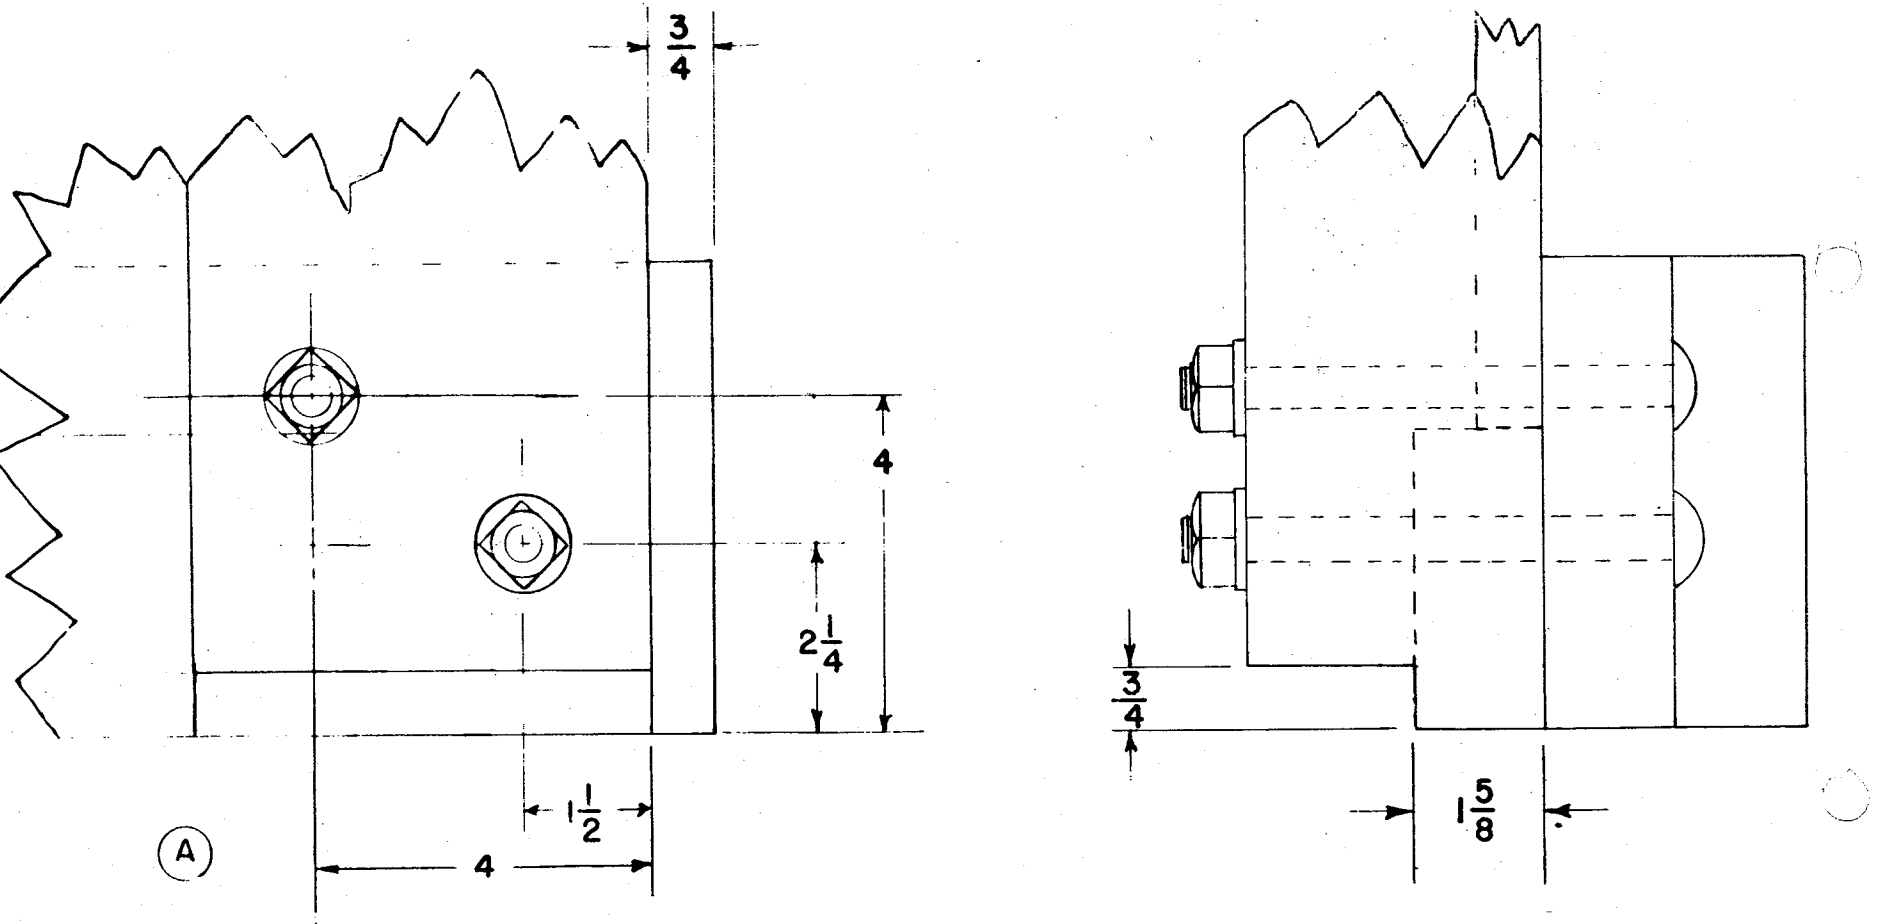


PACKAGING OF ANTENNA ASSEMBLY
FIGURE 2 VIEW A (REF. FIG. 1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46Z
Check the source to verify that this is the current version before use.

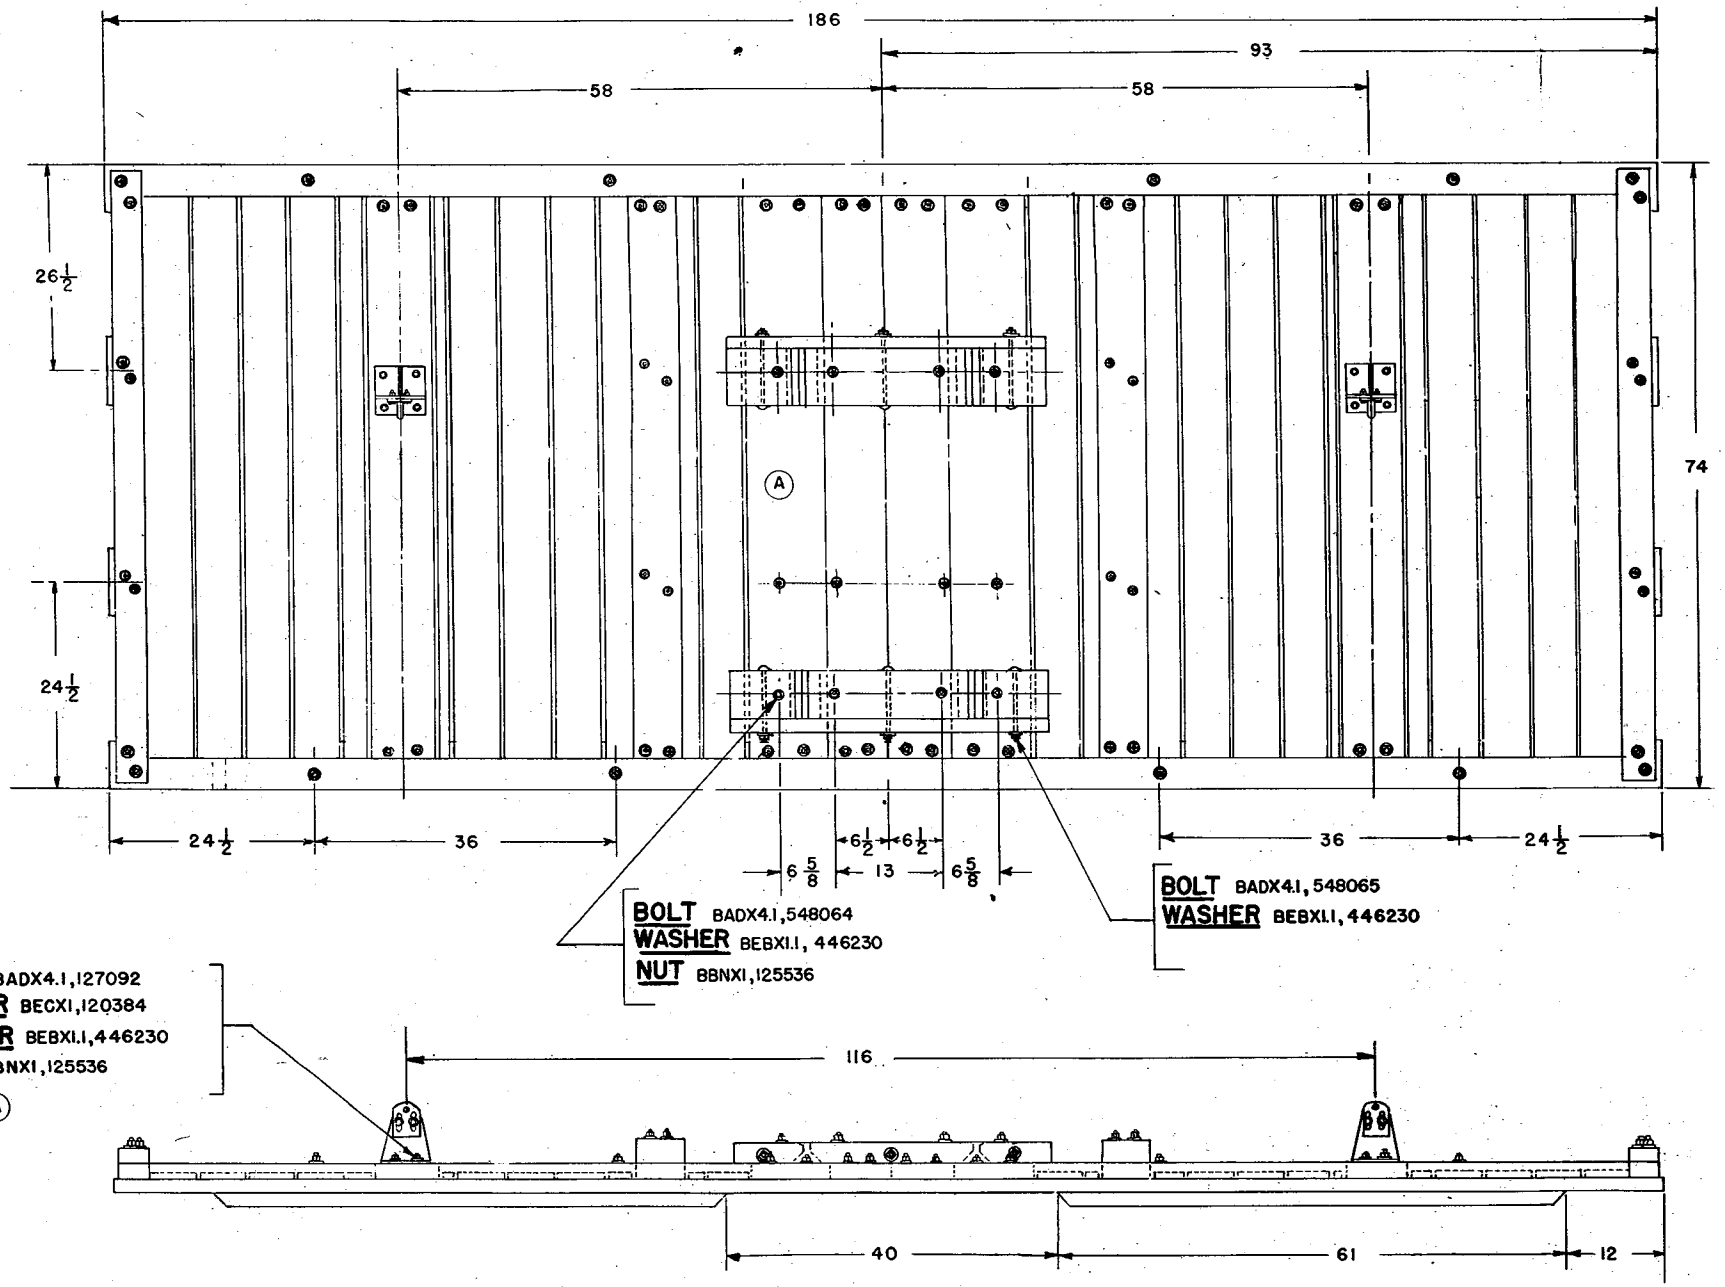


PACKAGING OF ANTENNA ASSEMBLY
FIGURE 3 SKID WITH SECURING DEVICES

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46:2
Check the source to verify that this is the current version before use.

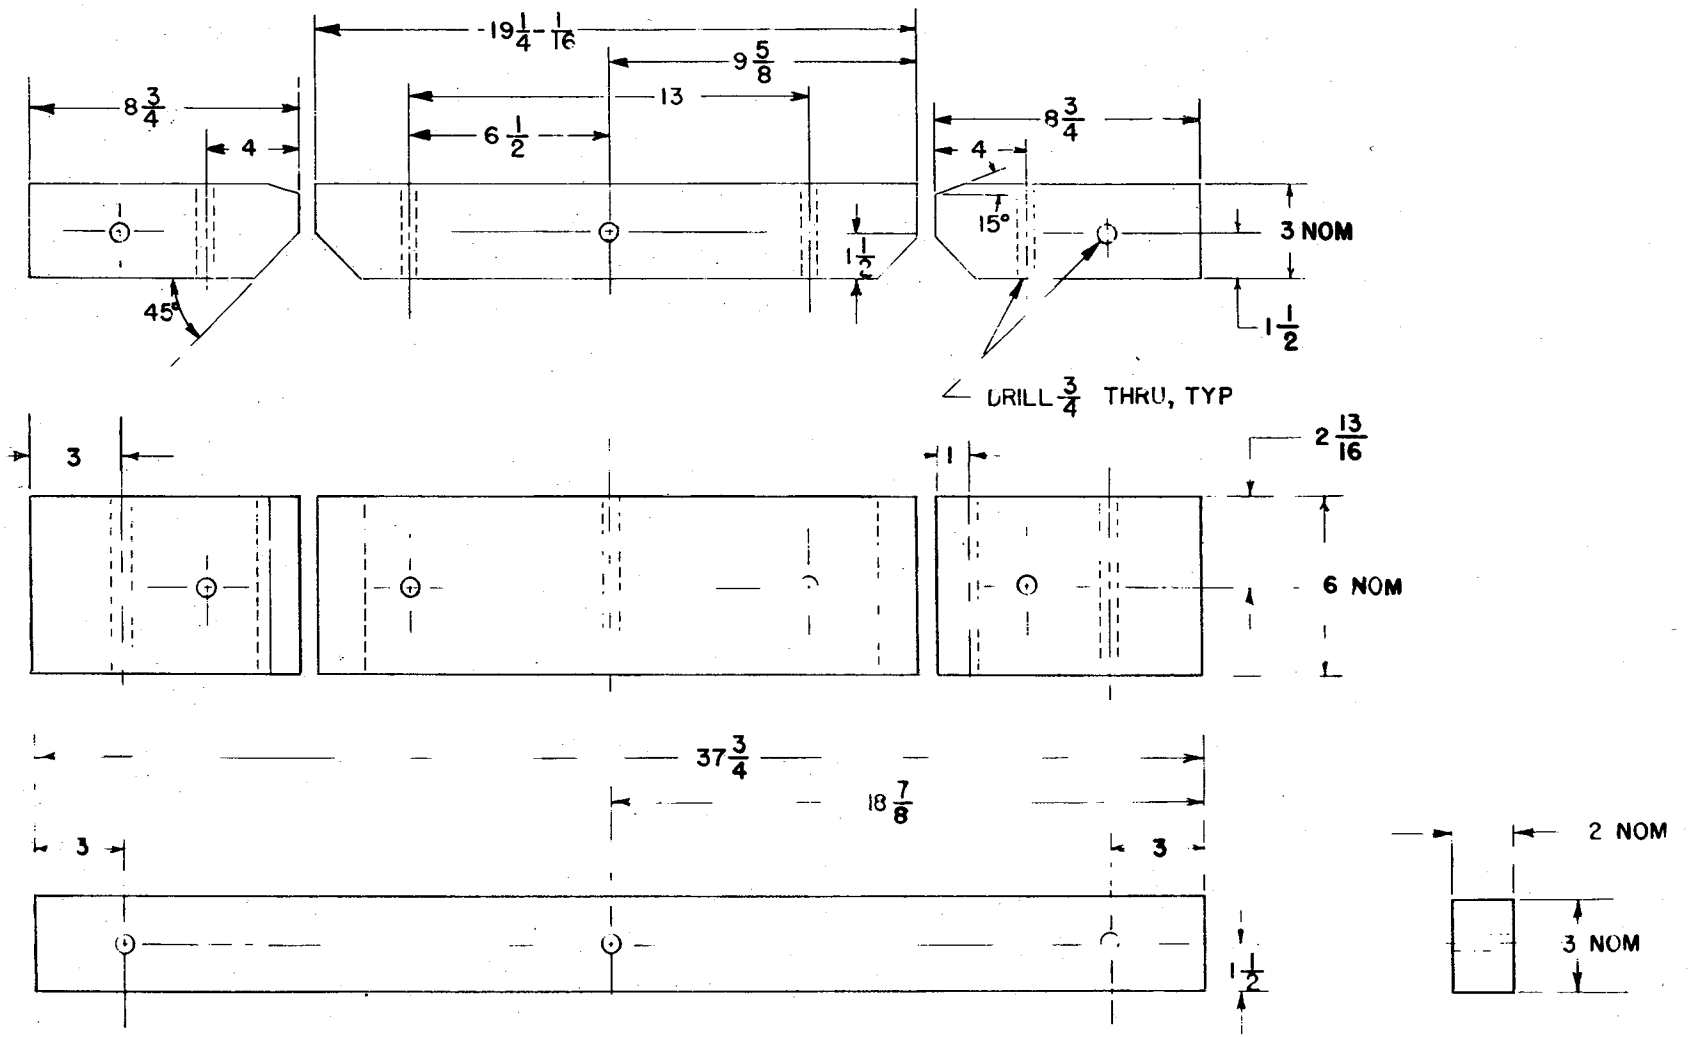

PACKAGING OF ANTENNA ASSEMBLY
FIGURE 4 ANTENNA SECURING ASSY-DETAIL

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46Z
Check the source to verify that this is the current version before use.

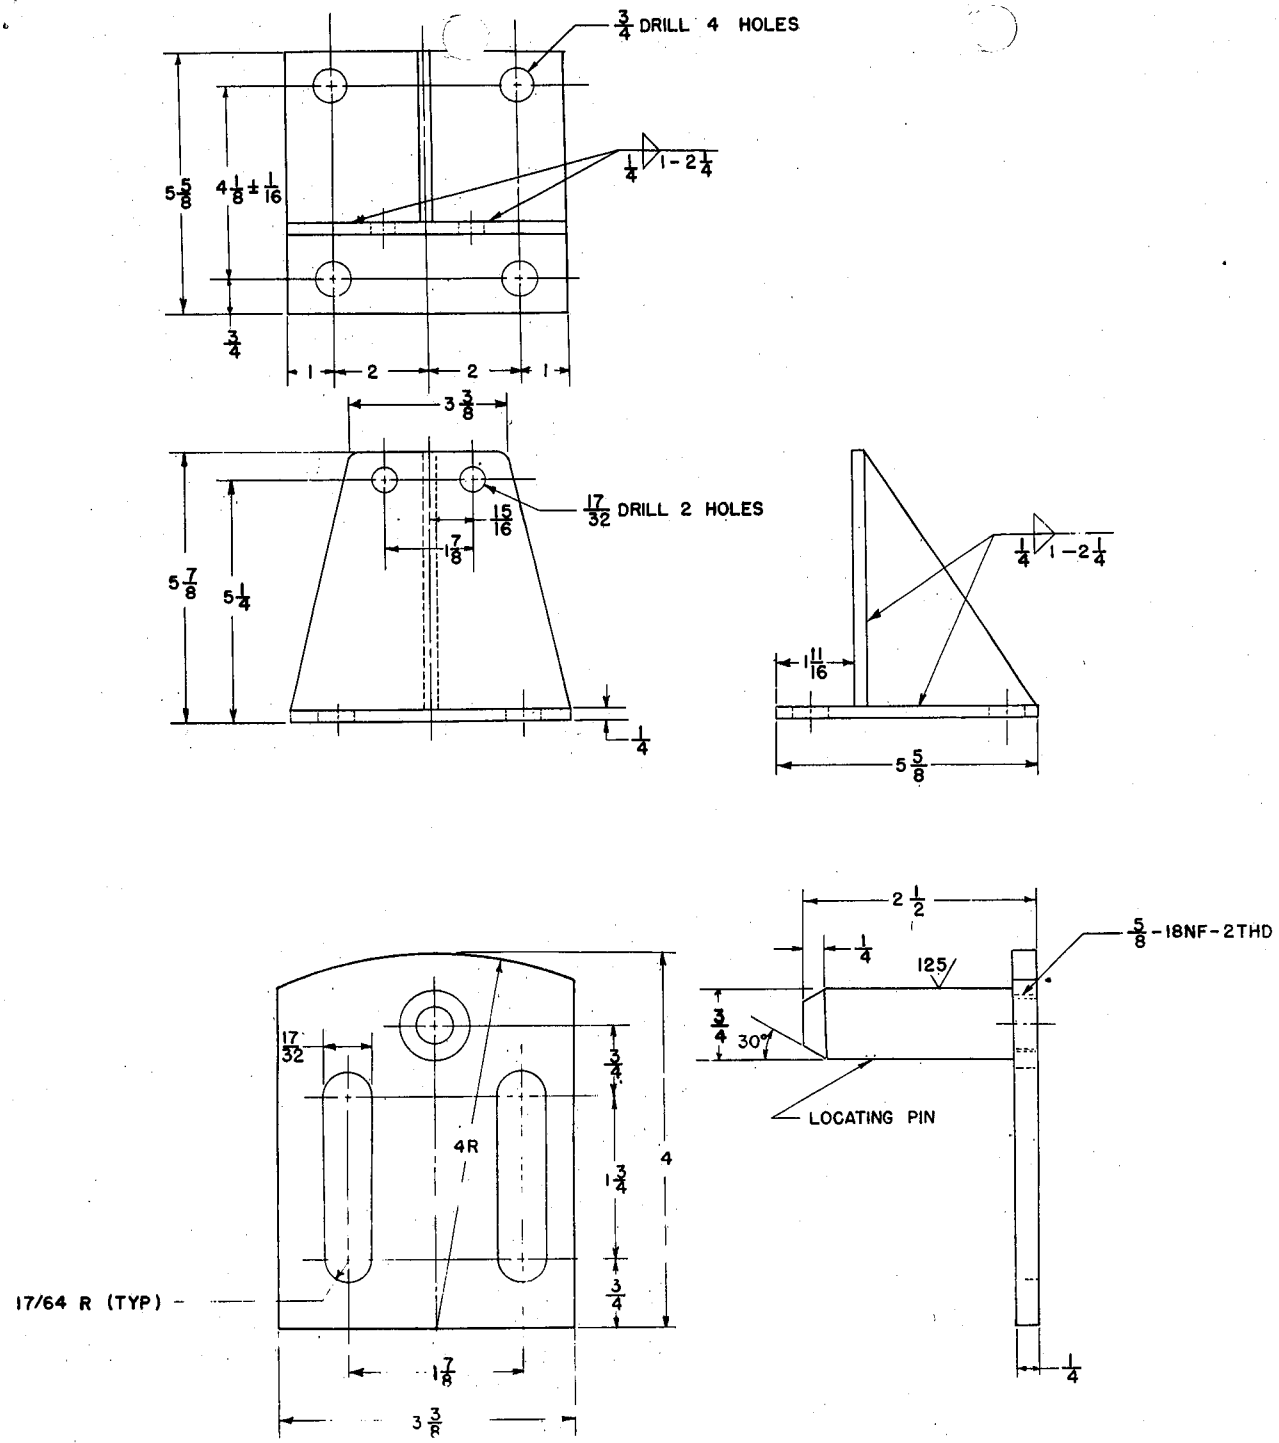


NOTES

1. TOLERANCES FOR ALL WOOD MEMBERS SHALL BE ± 1/8.
2. TOLERANCES FOR METAL PARTS SHALL BE ± 1/64.
3. FOR REFERENCE ON METAL BRACKET ASSEMBLY SEE W.E. DRWG. NO. 85970.

PACKAGING OF ANTENNA ASSEMBLY
FIGURE 5 BRACKET AND ADJUSTING PLATE


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46Z
Check the source to verify that this is the current version before use.

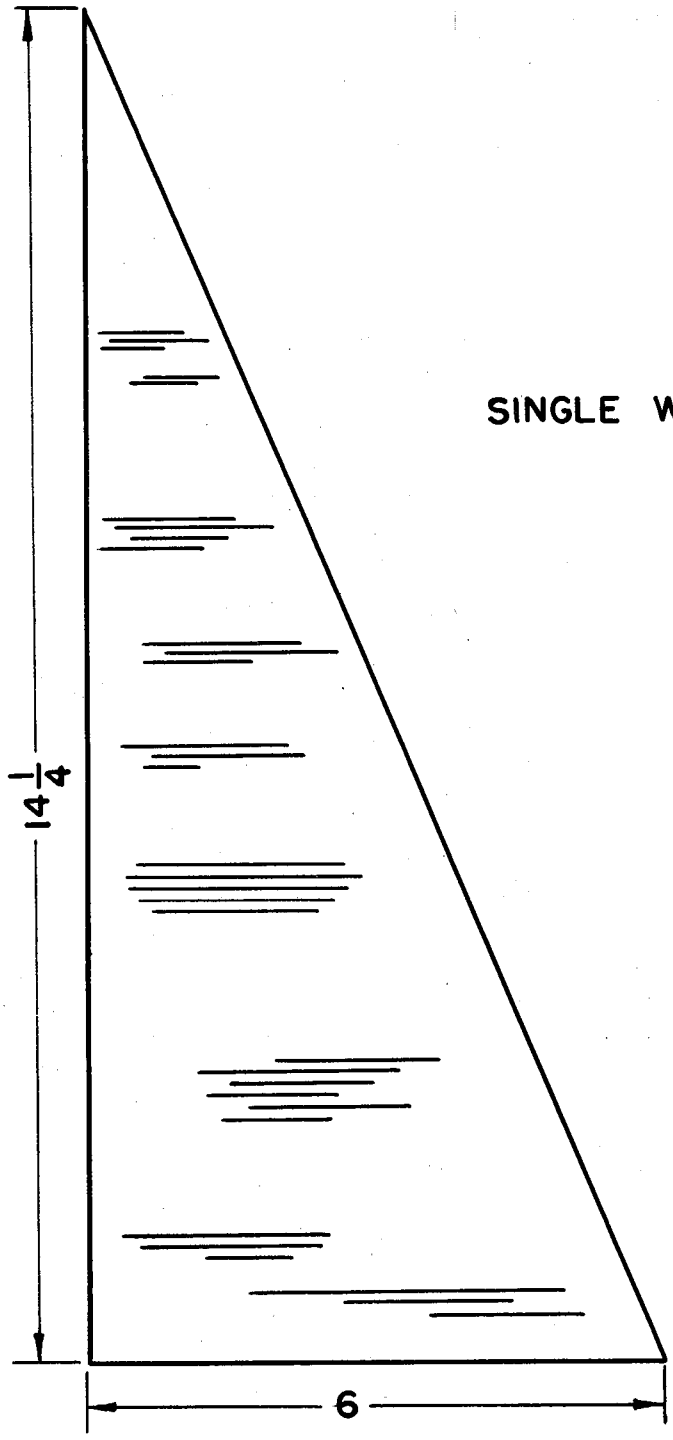

PACKAGING OF ANTENNA ASSEMBLY

FIGURE 6 FIBERBOARD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46Z
Check the source to verify that this is the current version before use.

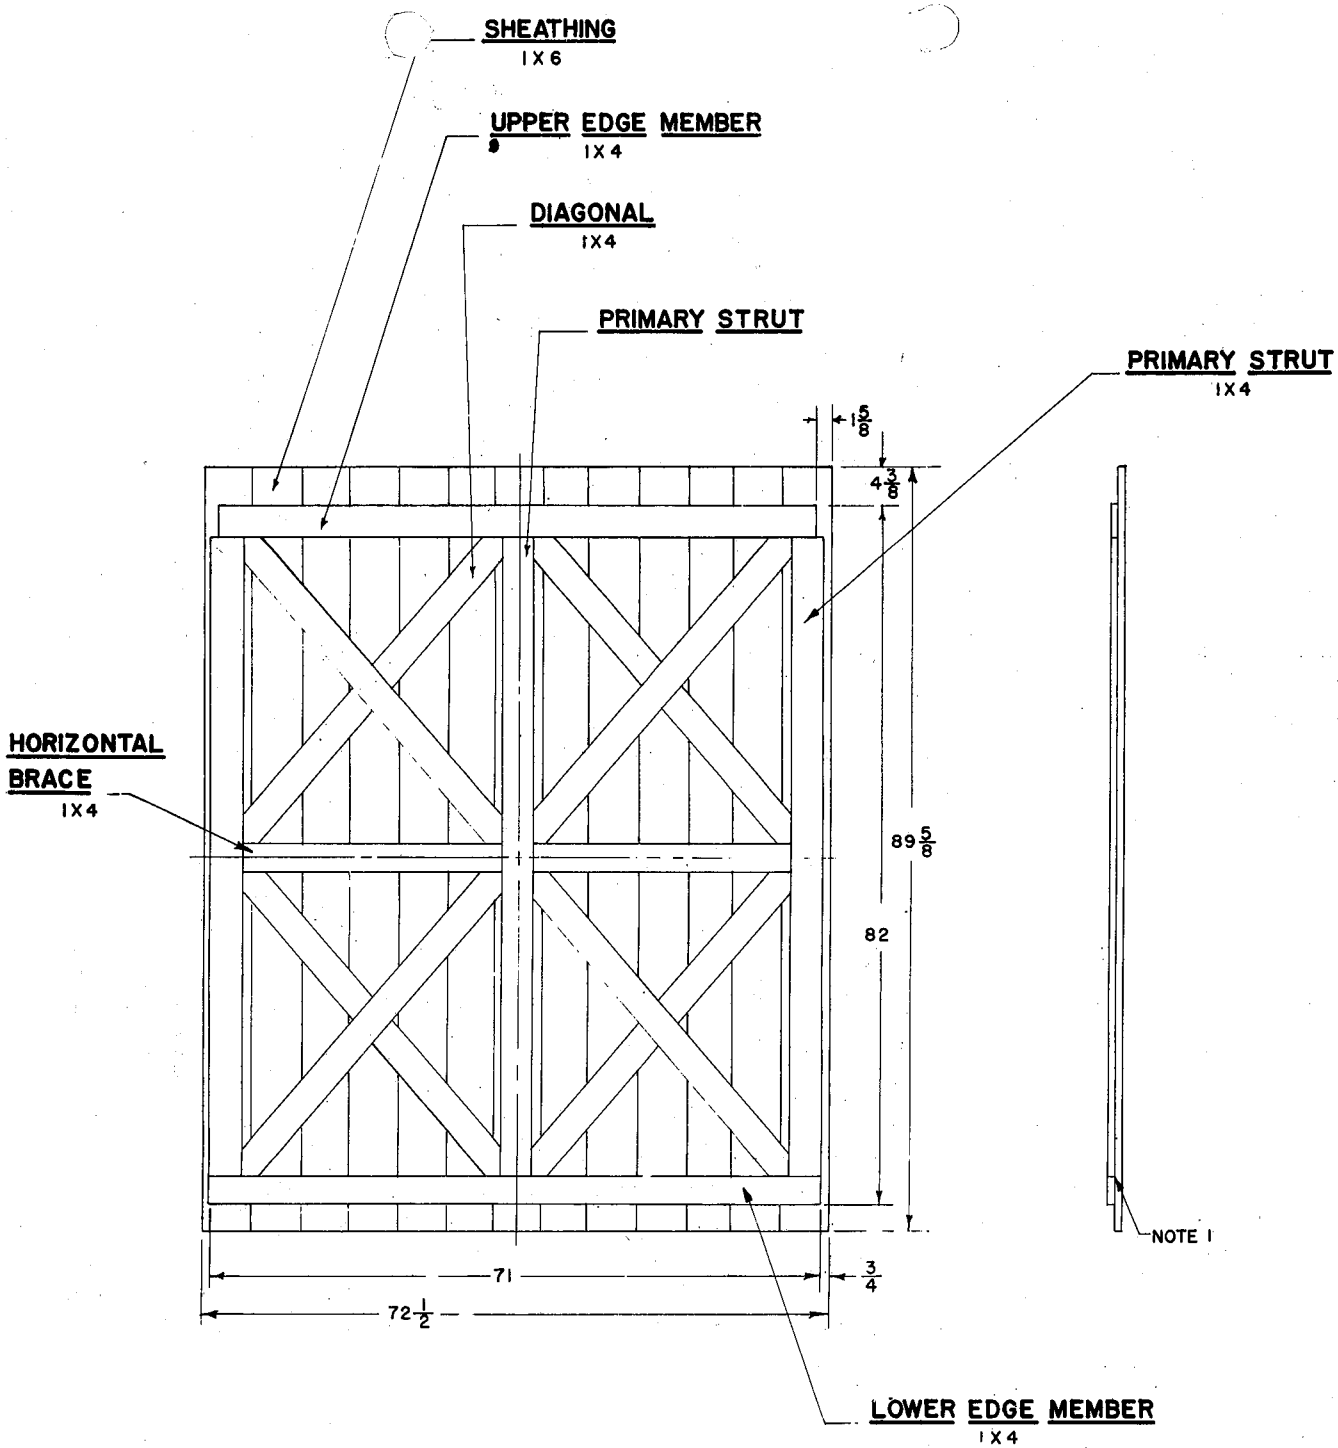


NOTES

(A) 1. BARRIER PAPER PER JAN-B-125, TYPE E-1 TO BE APPLIED TO ENDS BETWEEN SHEATHING AND FRAME MEMBERS.


2. VENTILATING HOLES SHALL BE PROVIDED ACCORDING TO MIL-C-3769, PARAGRAPH 3.3.2.12. (A)

PACKAGING OF ANTENNA ASSEMBLY
FIGURE 7 END

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46Z
Check the source to verify that this is the current version before use.

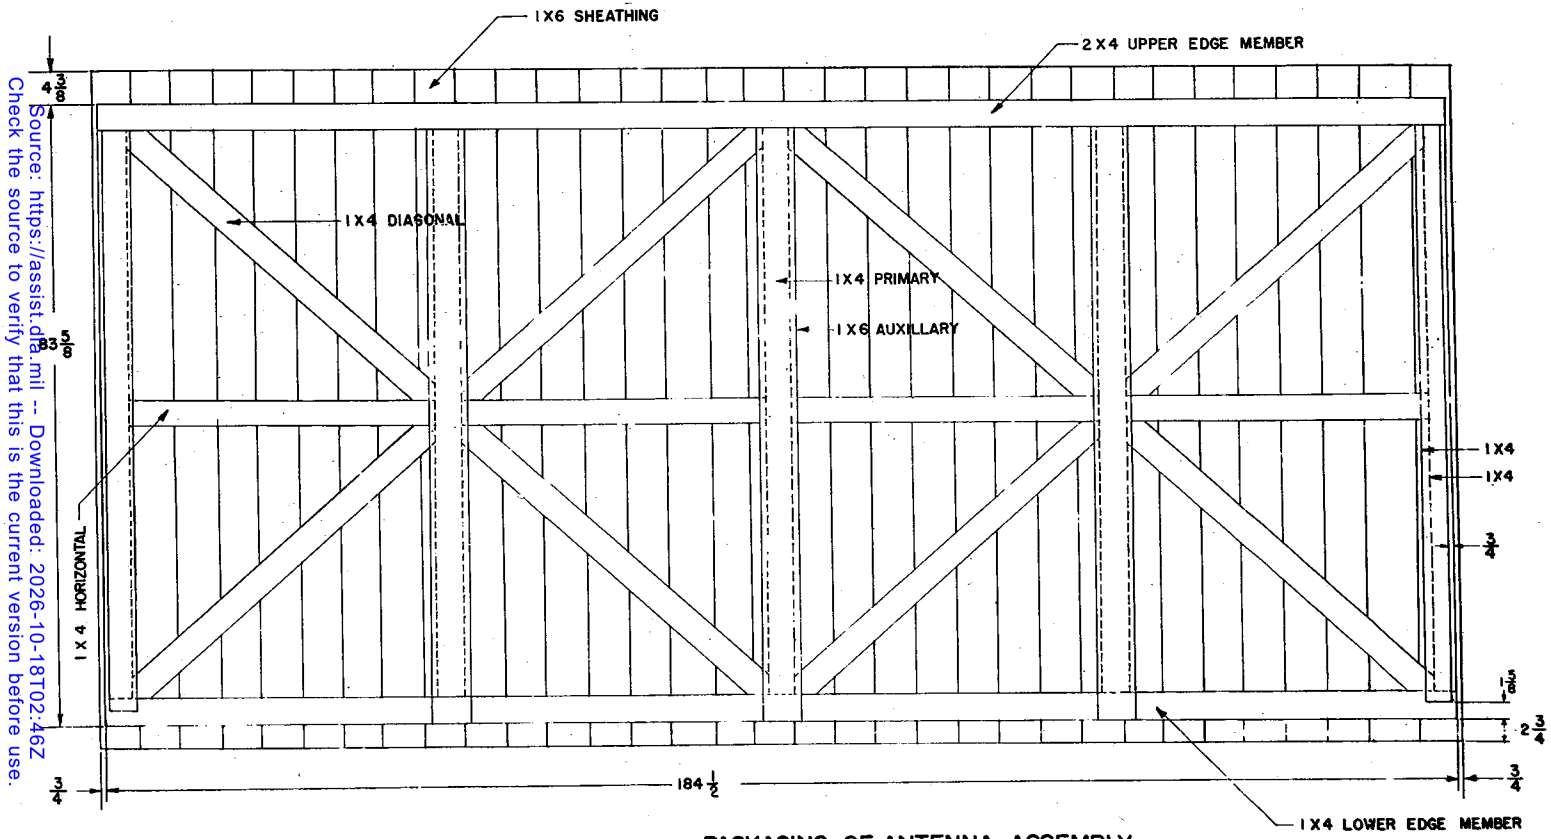

PACKAGING OF ANTENNA ASSEMBLY
FIGURE 8 SIDE

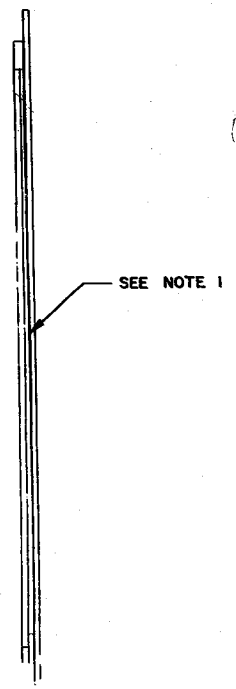


NOTE:


1. BARRIER PAPER PER JAN-B-125 TO BE APPLIED BETWEEN FRAME MEMBERS AND SHEATHING FOR SIDES AND BETWEEN LAYERS OF SHEATHING FOR TOP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46Z
Check the source to verify that this is the current version before use.

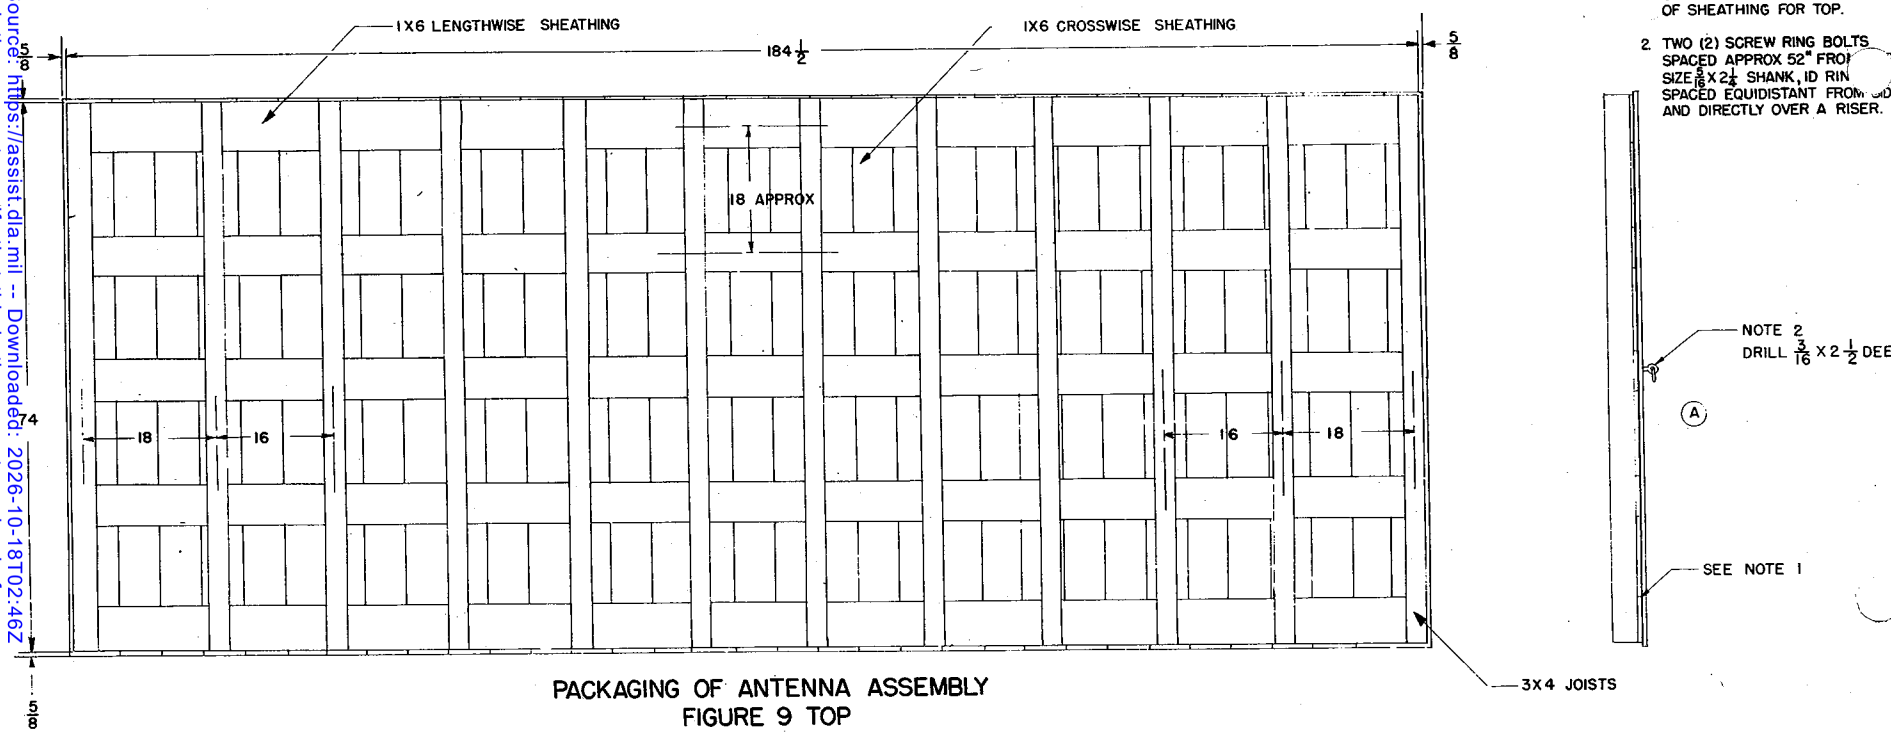

PACKAGING OF ANTENNA ASSEMBLY
FIGURE 9 TOP



DETAIL A (TYP)
SCALE 3/8

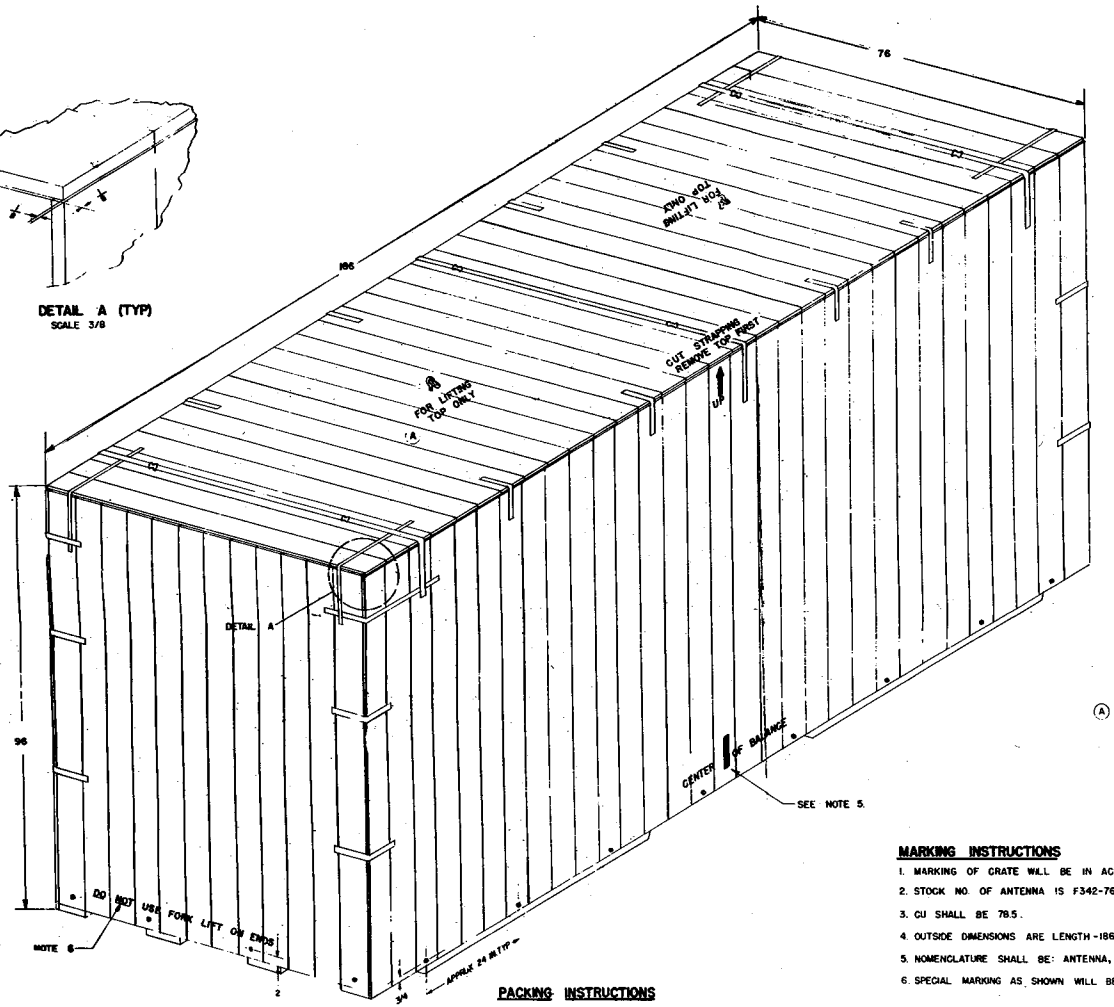

NOTES

1. FOR OVERSEAS SHIPMENT, TOP WILL BE WEATHER PROOFED ACCORDING TO MIL-C-3769, PAR. 3.3.4.4.
2. ALL LUMBER TO BE NOMINAL SIZE UNLESS AS INDICATED ON DWG.
3. NAILS AND NAILING PATTERN TO BE IN ACCORDANCE WITH MIL-C-3769.
4. SIDES AND ENDS OF CRATE TO BE JOINED BY STRAPPING, TOP TO BE SECURED BY STRAPPING AS SHOWN.
5. TO BE ADDED BY LOADER.
6. TO BE APPLIED TO BOTH ENDS.

PARTS LIST

LINE NO	NAME OF PART	REQD	MATERIAL KIND	MATERIAL GRADE	DWG OR SPEC NO.	REMARKS
1	BASE AND TOP	1EA	WOOD	II	MIL-C-3769	NOTE 2
2	SIDE AND END	2EA	WOOD	II	MIL-C-3769	NOTE 2
3	BRACKETS, ADJUSTABLE, ASSY	2	STEEL		CB007196	
4	ANTENNA SECURING ASSY	1	WOOD	II		
5	WEATHER PROOFING		ASPHALT SAT ROOF FLT	COMM	MIL-C-3769	NOTE 1
6	STRAPPING		STEEL, ZINC COATED	TYPE I CL. B	QQ-S-781	
7	BOLTS, CARRIAGE	16	STEEL, ZINC COATED	COMM	BADX41 127087	
8	BOLTS, CARRIAGE W/NUT	20	STEEL, ZINC COATED	COMM	BADX31 548065	
9	BOLTS, CARRIAGE	24	STEEL, ZINC COATED	COMM	BADX41 127094	
10	BOLTS, CARRIAGE	16	STEEL, ZINC COATED	COMM	BADX41 127107	
11	BOLTS, CARRIAGE W/NUT	8	STEEL, ZINC COATED	COMM	BADX31 548064	
12	NUT, SQ HD	56	STEEL, ZINC COATED	COMM	BRRXI 199836	
13	WASHER, FLAT	90	STEEL, ZINC COATED	COMM	BERXI 446230	
14	WASHER, LOCK	8	STEEL, ZINC COATED	COMM	BEGXI 122384	
15	TAPE, WATER RESISTANT			COMM	PPP-T-0076	
16	BOLT, LAG	24	STEEL, ZINC COATED	COMM	BOTXI2 582976	
17	WASHER, FLAT	24	STEEL, ZINC COATED	COMM	BERXII 446213	
18	BOLT, SCREW RING	2	STEEL, GALVANIZED	COMM		
19	BARRIER, MATERIAL WATERPROOF		PAPER AND ASPHALT	E-1	JAN-B-121	
20	BOLTS, CARRIAGE W/NUT	6	STEEL, ZINC COATED	COMM	BADX41 548065	

MARKING INSTRUCTIONS

1. MARKING OF CRATE WILL BE IN ACCORDANCE WITH MIL-STD-129
2. STOCK NO. OF ANTENNA IS F342-7622310.
3. CU SHALL BE 78.5.
4. OUTSIDE DIMENSIONS ARE LENGTH-186, WIDTH-76, HEIGHT-96
5. NOMENCLATURE SHALL BE: ANTENNA, ACQUISITION, 1-ASSY.
6. SPECIAL MARKING AS SHOWN WILL BE USED.

PACKING INSTRUCTIONS

(A) 1. BEFORE LOADING ANTENNA REMOVE END PANELS AND IMMOBOLIZE LENS BY PLACING CORRUGATED BOARD BETWEEN LENS AND STATIONARY BARS ON REFLECTOR. SECURE CORRUGATED BOARD TO LENS BY TAPING

2. SECURE ANTENNA TO BASE ASSY WITH ADJOINING METAL BRACKETS AND WOOD BRACKET ASSEMBLIES ATTACH SIDES AND ENDS TO BASE OF CRATE WITH LAG SCREWS, AND METAL STRAPPING. PLACE TOP IN POSITION AND SECURE WITH STRAPPING.

3. STRAPPING OF CRATE WILL BE IN ACCORDANCE WITH MIL-C-3769 SEE LINE 6.

(A) WEIGHTS (ESTIMATED)

	PART	POUNDS
1	CRATE	1350
2	ACQUISITION ANTENNA	900
	TOTAL	2250

LINE NO	LIST OF DRAWINGS	DWG NO.
1.	CRATE, WOOD, SHIPPING, FOR ANTENNA ACQUISITION (MARKING, PACKING AND ASSY DWG)	8026379
2		
3	CRATE, WOOD, SHIPPING, FOR ANTENNA ACQUISITION (BASE DETAIL)	8026380
4	CRATE, WOOD, SHIPPING, FOR ANTENNA ACQUISITION (TOP AND SIDE ASSEMBLIES)	8026381
5.	CRATE, WOOD, SHIPPING, FOR ANTENNA ACQUISITION (BASE AND END ASSY)	8026382

PACKAGING OF ANTENNA ASSEMBLY

FIGURE 10 ASSEMBLED CRATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:46Z
Check the source to verify that this is the current version before use.